

ASSEMBLY INSTRUCTIONS

ITEM NO: LA-8044


- * *SHUT OFF MAIN POWER AT CIRCUIT BREAKER BEFORE ATEMPTING BEFORE INSTALLTION.*
- * *THIS FIXTURE IS SUITABLE FOR DRY LOCATION ONLY.*
- * *THIS FIXTURE SHOULD ONLY BE CLEANED WITH A SOFT LINT FREE CLOTH DAMPLED WITH WATER. DO NOT USE ANY CHEMICAL OR ABUSIVE CLEANER AS THEY MAY DAMAGE THE SURFACE OF THE PRODUCTS.*

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. DRILL HOLES IN THE WALL AND INSERT THE ANCHOR (A) WHEN NECESSARY.
2. INSTALL THE MOUNTING PLATE (C) WITH SCREWS (D) TO THE JUNCTION BOX OR DIRECTLY INTO THE WALL WITH SCREW (B).
3. PULL OUT EXISTING WIRES AND MAKE PROPER CONNECTIONS WITH WIRE NUTS.
4. ALIGN THE LIGHTING BODY (E) TO THE MOUNTING PLATE (C) AND FIX IT WITH SIDE SCREW (F).
5. TURN ONTH POWER.

ENJOY YOUR LIGHT!!!

**Use Max 20W LED bulb
(bulb included)**

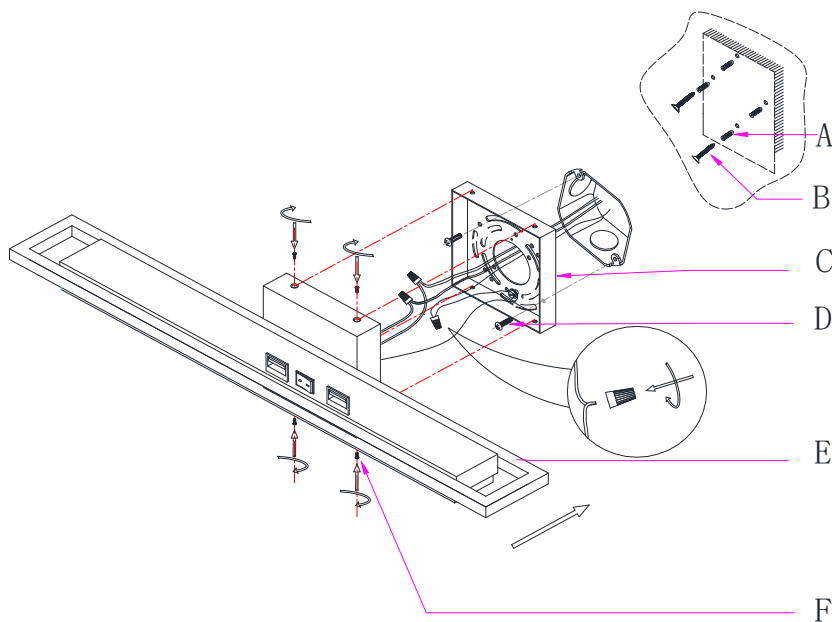

*** THIS LED LIGHT PROVIDES LOW MAINTENANCE SERVICE WITH NO BULBS TO CHANGE.***

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.