


CORBETT

CARDIFF 515-35 Installation Instructions

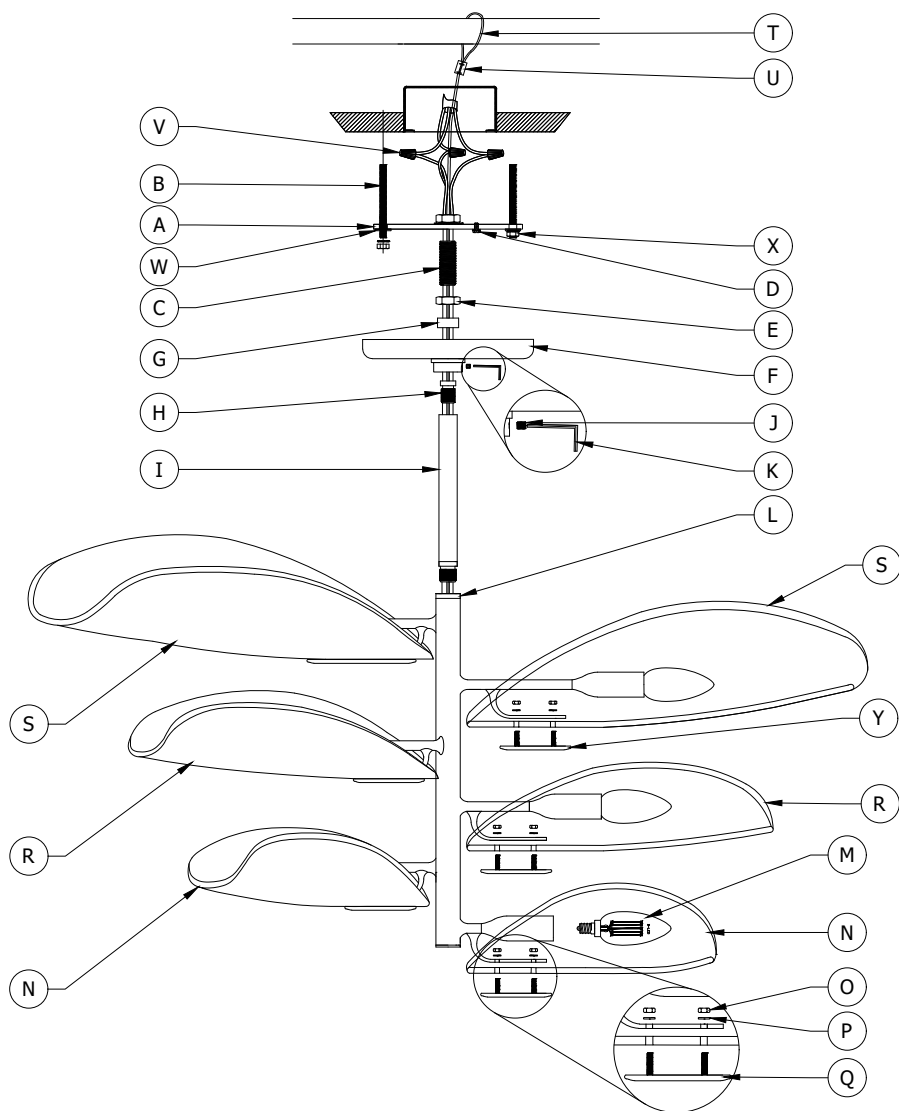

FIXTURE INSTALLATION

1. Using the MOUNTING PLATE (A) as a template mark the holes for the THREADED ROD (B) (BY OTHERS). NOTE: THREADED ROD (B), WASHER (O), and NUT (N) (BY OTHERS) must be a minimum of $\frac{1}{4}$ and affixed to the building structure following local building codes.
2. Feed the wire through the STEM (I) and twist tightly onto the FIXTURE ASSEMBLY (L). Keep adding additional stems until your desired hanging height is met.
3. Attach the PLASTIC RING (G) inside the CANOPY (F). Place the CANOPY (F) at the top of the STEM (I) and let the CANOPY (F) slide through the STEM (I).
4. Fully thread the CONNECTOR (H) on top of the STEM (I). Thread the NIPPLE (C) onto the CONNECTOR (H), then thread the MOUNTING PLATE (A) onto the NIPPLE (C) and secure using HEX NUT (E).
5. Slide crimp type CABLE CLAMP (U) onto the safety cable. Feed the SAFETY CABLE (T) down through one of the holes in the top of the outlet box. Loop the SAFETY CABLE (T) over the additional support. Feed the SAFETY CABLE (T) back through the top of the box and the CABLE CLAMP (U). Using the crimping tool, tightly crimp the CABLE CLAMP (U) to lock the SAFETY CABLE (T) in position.
6. Pull the wire out from the junction box, and lift up the FIXTURE ASSEMBLY (L) with MOUNTING PLATE (A) onto the junction box with the MOUNTING SCREWS (B). Screw on the WASHERS (W) (BY OTHER), HEX NUTS (X) (BY OTHER), This fixture is designed to be mounted on heavy duty junction box rated for a minimum 90lbs. The junction box must be securely mounted to the structure of the building.
7. Attach the Ground wire (Green) to the ground inside the outlet box (Generally green or bare copper wire) or the GROUND SCREW (D) on the MOUNTING PLATE (A). NEVER CONNECT GROUND WIRE TO "HOT" WIRE! FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
8. Connect the white fixture lead to the neutral (Generally white) wire in the outlet box. Fasten the wires together with an approved fastener (WIRE NUT) (V). Starting 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener. MAKE SURE THERE ARE NO EXPOSED WIRE OF STRANDS THAT COULD CAUSE A DANGEROUS SHORT CIRCUIT!
9. Connect the black fixture leads to the hot (Generally black) wire in the outlet box. Fasten the joined wires same as previous step. NEVER REVERSE HOT AND NEUTRAL WIRES. FAILURE TO FOLLOW THIS COULD RESULT IN SERIOUS INJURY OR DEATH!
10. Push the wires back into the junction box. Lift up the CANOPY (F) and secure with ALLEN SCREW (J) using ALLEN WRENCH (K).
11. Carefully Insert the SMALL GLASS (N), MEDIUM GLASS (R) & LARGE GLASS (S) onto the GLASS HOLDER (O) then attach onto the FIXTURE ASSEMBLY (L) and secure using HEX NUT (O) along with SILICON WASHER (P).
12. Screw the BULB (M) into the SOCKET of the FIXTURE ASSEMBLY (L). THIS FIXTURE IS RATED FOR 10 WATT MAX TYPE B LAMP. DO NOT EXCEED THE RECOMMENDED WATTAGE!
13. Restore power to the OUTLET at the breaker or fuse box.

PART(S)	REPLACEMENT PART NAME	NUMBER	PART(S)	REPLACEMENT PART NAME	NUMBER
A,B,C,D,E,V	HARDWARE KIT	HDW-515-35	S	LARGE GLASS	GLS-515-35
G,F	CANOPY ASSEMBLY	CAS-515-35	R	MEDIUM GLASS	GLS-515-08-A
I	STEM	STM-TCI900-SET	N	SMALL GLASS	GLS-515-08-B
U,V	SAFETY CABLE	CBL-515-08	O,P,Q	GLASS HOLDER ASSEMBLY	HAS-515-08
			O,P,Y	GLASS HOLDER ASSEMBLY B	HAS-515-35