

CRYSTORAMA


1958

95 Cantiague Rock Road, Westbury NY 11590

Ph: 516.931.9090 fax: 516.931.1254


info@crystorama.com www.crystorama.com

MODEL#: 8104-PN ASSEMBLY AND DRESSING INSTRUCTIONS

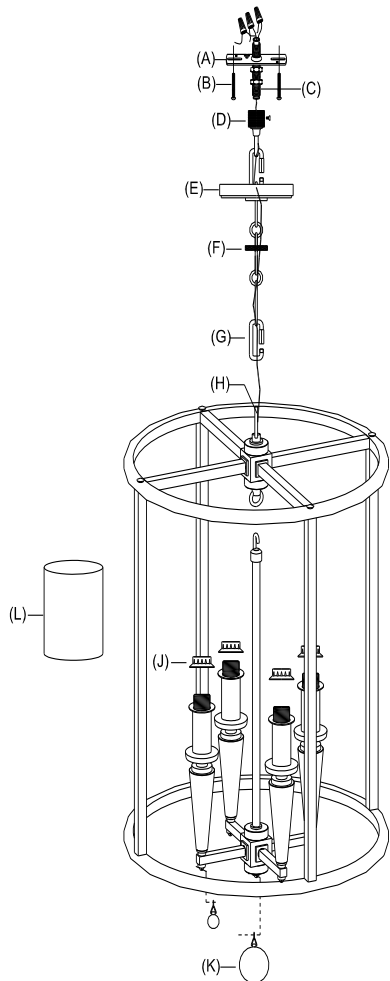


PARTS ENCLOSED:

- | | |
|---------------------|-----------------------|
| (A) Mounting strap | (G) Chain |
| (B) Mounting screws | (H) Top loop |
| (C) Nipple | (I) Socket ring |
| (D) Mounting loop | (J) Socket ring |
| (E) Canopy | (K) Crystal drop (2") |
| (F) Canopy ring | (L) Lamp shade |



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4 - Cand. Bulb
40 Watts Max
Bulb not included.

WARNINGS:

Turn off power (unplug from the wall outlet) before replacing the bulb(s), making sure the bulb(s) had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn off power to the junction box where the pendant will be installed.
3. Hook the chain (G) to top loop (H) on light fixture.
4. Feed wire through chain (G) and mounting loop (D).
5. Slip canopy ring (F) and canopy (E) over the upper end of the chain. Open the end link of the chain and lift the lantern box to attach to the mounting loop and secure the link.
6. Attach mounting strap (A) to mounting outlet box with mounting screws (B) and insert top thread nipple (C) in mounting strap (A).
7. Attach chain mounting loop (D) to thread nipple (C).
8. Attach the fixture ground wire to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
9. Connect the hot wire to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
10. Connect the neutral wire to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
11. Tuck these wire connections neatly into the ceiling outlet box.
12. Raise the canopy (E) to the ceiling and screw canopy ring (F) onto the mounting loop (D) to secure.
13. Remove socket rings (J) from sockets, place lamp shades (L) onto the threaded section of sockets, secure with socket rings (J).
14. Hook the crystal drops (K) to the bottom of light fixture.
15. Insert the recommended 40-watt Type B bulbs (not included) into the threaded sockets.
16. Restore power to the junction box and test the pendant fixture.
17. Assembly is complete.

CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.