

# CRYST RAMA



ASSEMBLY INSTRUCTION MODEL# ABI-2002-AG-BL



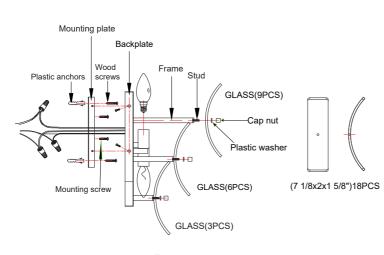

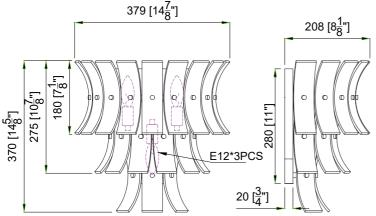

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate



You will need 3 - Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

## How to install

 Position the mounting plate over the outlet box and mark two points on the wall at the same spacing of the two holes on the mounting plate.
 Different the part the part the platter product of the part of the p

Drill holes into the wall and insert the plastic anchor.

- 2.Attach the mounting plate onto the outlet box with mounting screws. Insert the two wood screws into the plastic anchors and tighten with the screw driver(not provided).
- 3.Connect the electrical wires as shown.Place the frame over the mounting plate and secure with screws.
- 4.Install the bulbs into the socket.
- 5.Starting from the bottom of frame, place the glass over the stud on the frame and secure with the plastic washers and cap nuts.Do not overtighten the cap nut to prevent the glass from breaking.

# **Glass Sets**

1.18 pcs Blue Glass(7 1/8x2x1 5/8")

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

#### CRYST 8 4MA (> LIGHTING THE WAY FOR SIXTY YEARS




ASSEMBLY INSTRUCTION MODEL# ABI-2002-AG-BL

# Part Number

### Part Numbers

- A.Mounting hardware includes
  - (2)-Plastic anchors (2)-Wood screws
  - (2)-Mounting screws
  - (1)-Mounting plate
  - (4)-Backplate screws
- B. (1)-Backplate,H11xW6 7/8 xD 3/4"
- C. (1) "Datagolde, ITTAWG // SAD 3/4" (XBN2002AGBKP11IN)
  C. (18)-Blue glass, H7 1/8xW2xD1 5/8" (XBN2002BLGLA7.25IN)
  D. (18)-Cap nut, W3/8xH3/8" (XBN2002AGNUT)
  C. (1) Formation (Comparison of Comparison of Comparison

- E. (1)-Frame
- F. (36)-Plastic washers

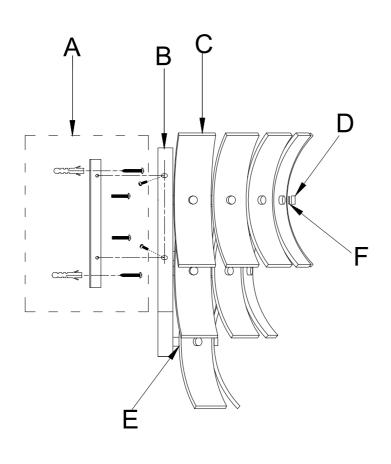

۲