

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS




ASSEMBLY INSTRUCTION MODEL # ABI-2006-AG-WH



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 13 Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Dry rated

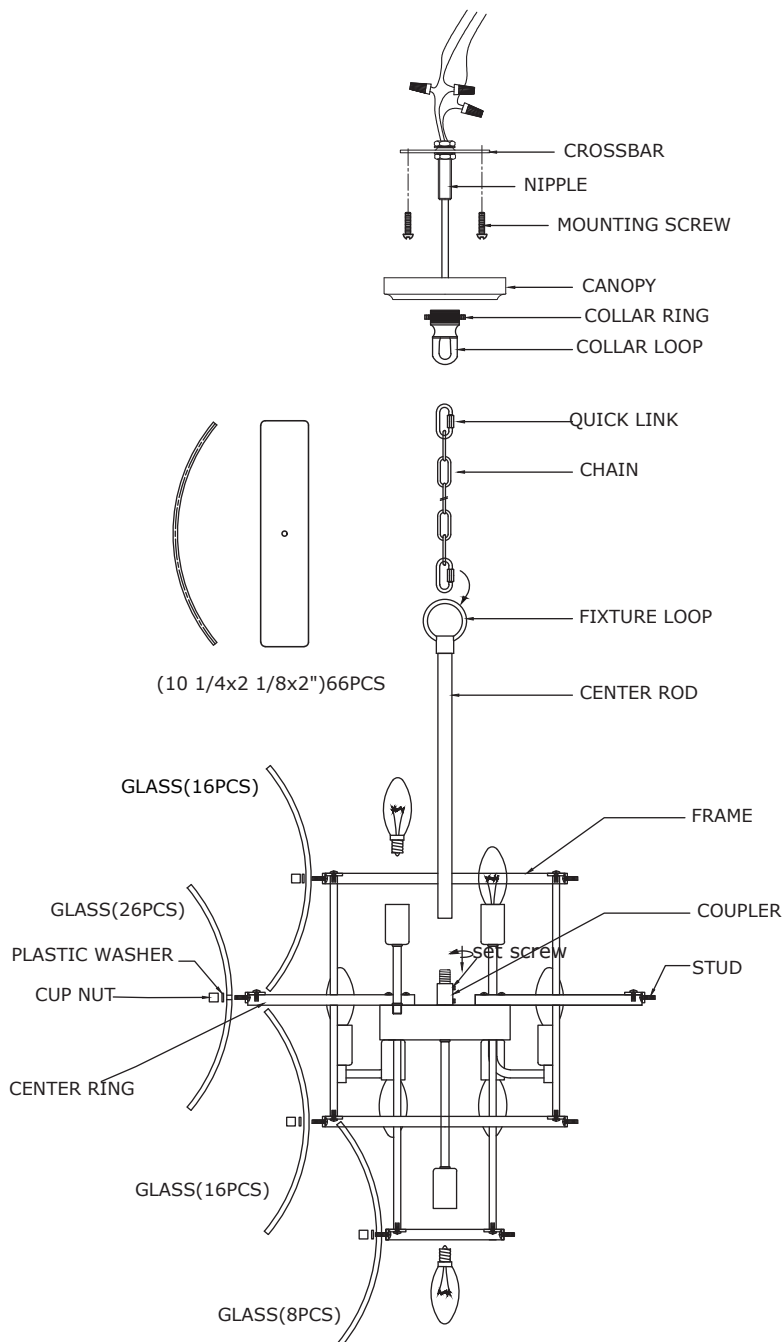

How to install


1. Decide the preferred hanging height and choose the correct length of chain needed. Feed the fixture wire through the center rod and screw it onto the coupler. (Loosen the set screw if the center rod can not be screwed all the way down).
2. Install the mounting bar onto the outlet box by using the two machine screws.
3. Attach one end of the quick link to the fixture loop, and the other end to the chain. Weave the fixture wire through the chain links. Slip the collar ring and canopy down over end of chain.
4. Raise the fixture up to the ceiling, and connect the other end of chain to the collar loop using a quick link.
5. Feed the wires carefully through the collar loop and nipple. Connect the electrical wires as shown.
6. Carefully raise the canopy up to the ceiling and secure with the collar ring.
7. Install the bulbs into socket.
8. Starting from the bottom of frame, place the glass over the stud on the frame and secure with the plastic washers and cap nuts. Do not over tighten the cap nut to prevent the glass from breaking. Dress the glass on the center ring last.

Glass Sets

1.66 pcs White Glass(10 1/4x2 1/8x2'')



WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

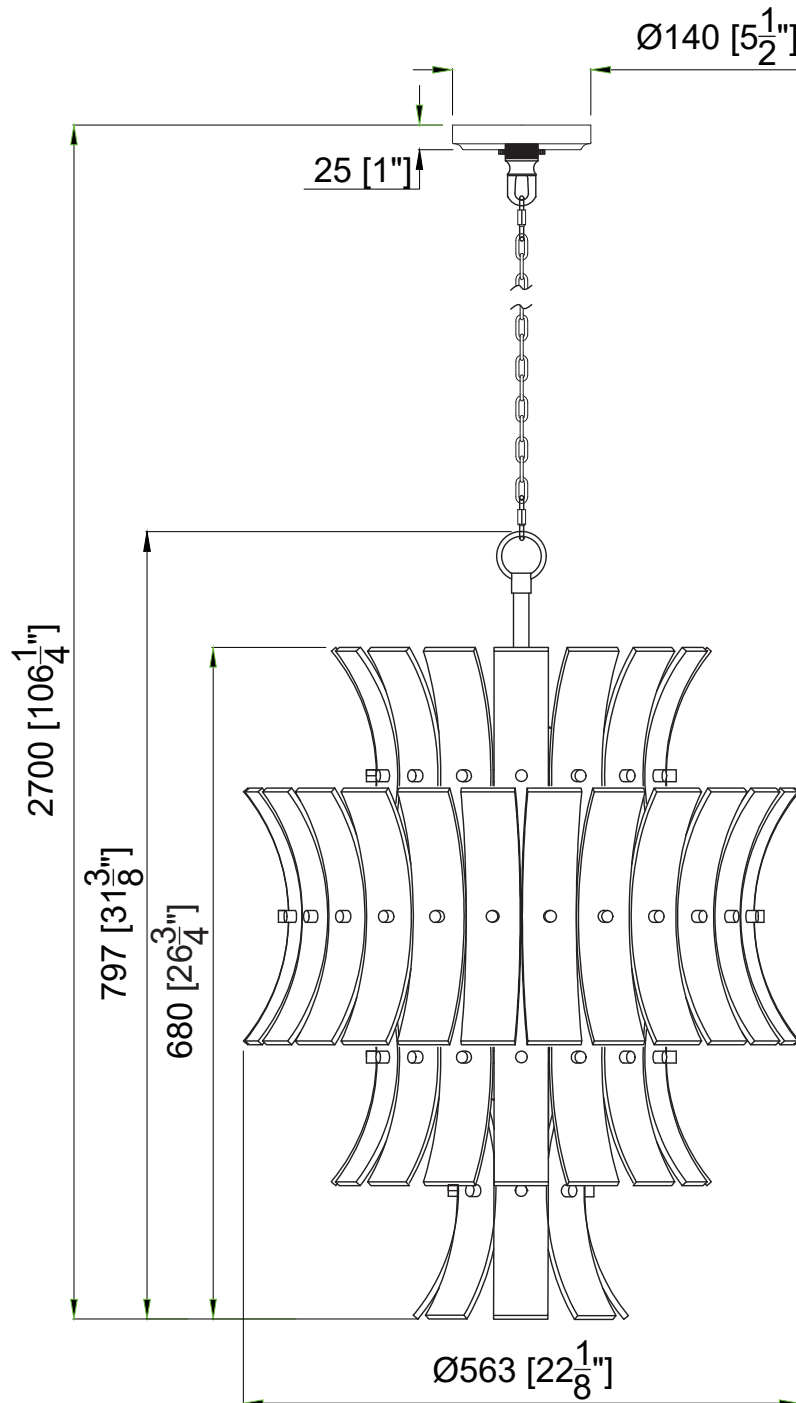

ASSEMBLY INSTRUCTION MODEL # ABI-2006-AG-WH

Part Number

Part Numbers

- A. Mounting hardware includes
 - (2)-Mounting screws
 - (1)-Crossbar
 - (2)-Hex.nuts
 - (1)-Nipple
- B. (1)-Canopy,D5-1/2xH1"
(XBN2006AGCAN5.5IN)
- C. (1)-Collar ring
- D. (1)-Collar loop
- E. (2)-Quick link
- F. (1)-Chain,D5mmxL72"
(XBN2006AGCHA5MM)
- G. (1)-Fixture loop
- H. (1)-Center rod,D16xL12"
(XBN2006AGROD12IN)
- I. (1)-Frame
- J. (66)-White glass,H10 1/4xW2 1/8xD2"
(XBN2006BLGLA10.25IN)
- K. (66)-Cap nut,D3/8xH3/8"
- L. (132)-Plastic washer

