

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL# ADD-329-CH-AU


Refer to the safety cable mounting on the next page



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 40 Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Dry rated

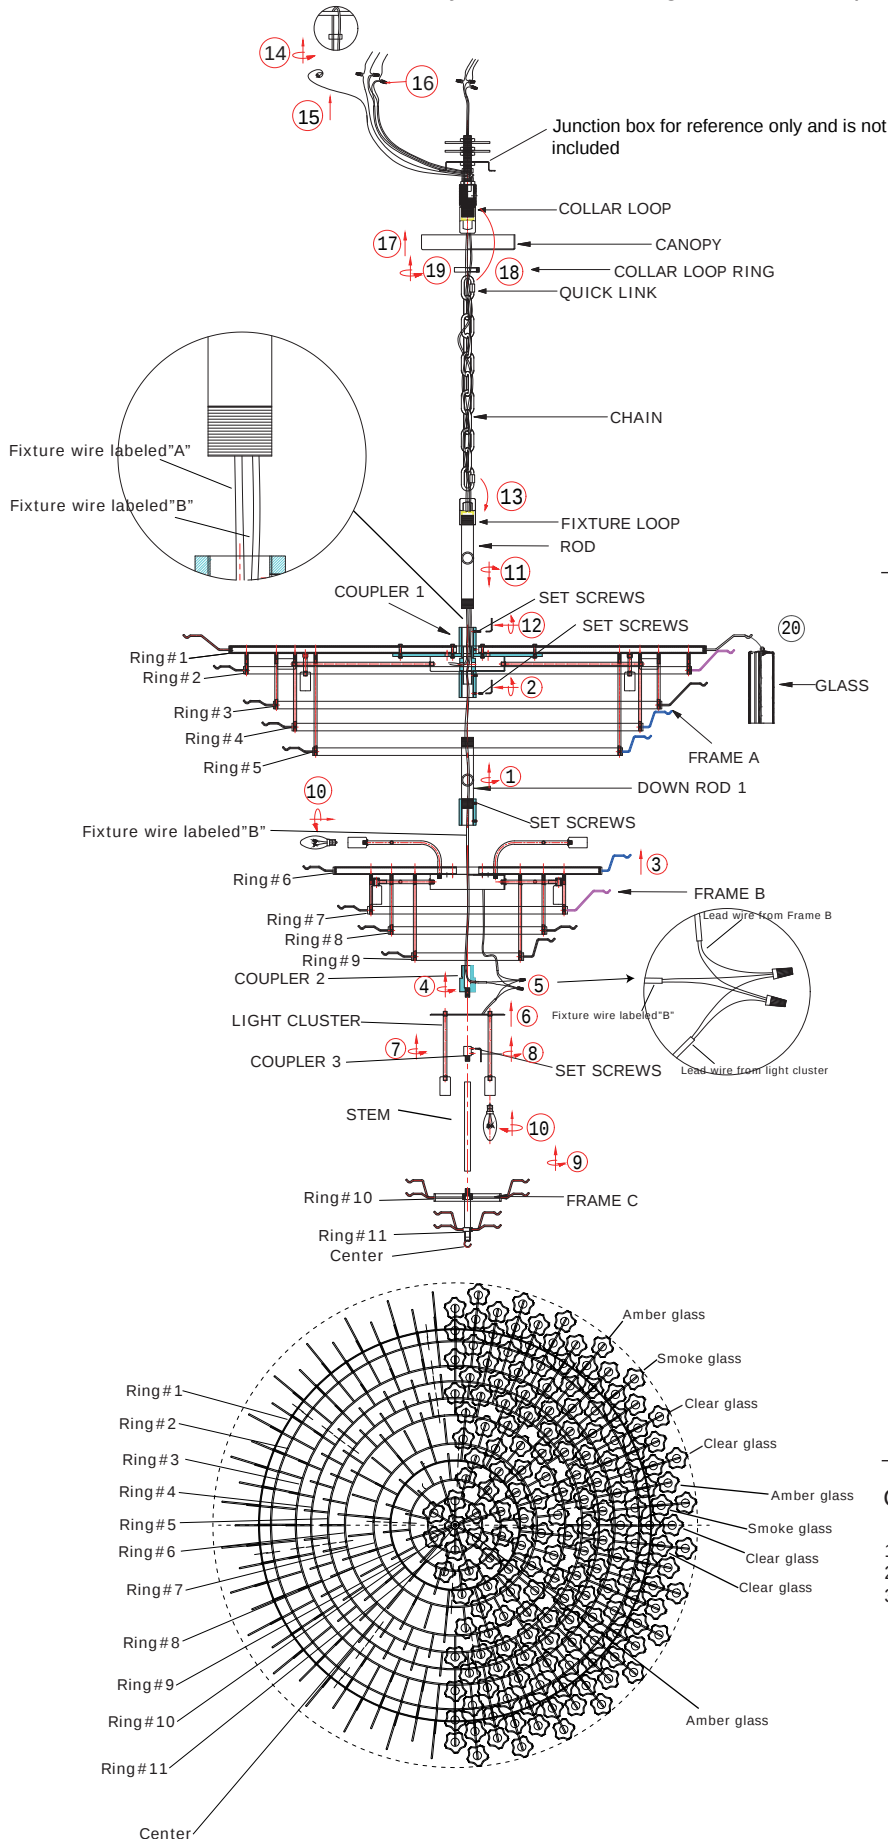

How to install

1. Decide the preferred hanging height and choose the correct length of chain needed.
2. Feed the fixture wires "A" and "B" through the rod, and screw it into the coupler (1) on top of frame(A), secure it using the set screws. Attach the quick link to the fixture loop and one end of chain, weave the fixture wires "A" and "B" through chain links. Slip the collar ring and canopy down over end of chain.
3. Refer to the safety cable mounting on the next page to complete the assembly of the mounting hardware.
4. Feed the fixture wire "B" through the down rod(1). Screw it into the coupler at the bottom of the frame(A) as shown and secure with set screws.
5. Slip the fixture wire "B" through the frame(B) and the coupler(2). Raise the frame (B) up to the end of the down rod (1), and secure it using the coupler(2). Exit the fixture wire B from side of the coupler(2).
6. Raise the light cluster up and connect the fixture wire"B" with lead wires from it and the frame (B), cap with wire nuts. Carefully push all wires and wire nuts into distribution box on frame (B), and allow the coupler(2) to protrude through the light cluster. Secure it by using the coupler(3). Then secure the set screws.
7. Screw the stem onto the coupler(3). Screw the frame(C) into the end of stem.
8. Install the bulbs into socket.
9. Dress the glass starting from the center.


Glass Sets

1.169 pcs	Clear glass W 2 3/4 x H7 3/4"
2.85 pcs	Smoke glass W 2 3/4 x H7 3/4"
3.85 pcs	Amber glass W 2 3/4 x H7 3/4"

Dress the glass for ring#1-11 with 2pcs Clear,1pc Smoke, 1pc Amber ,installed in a repeating sequence.
Dress the glass for ring#11 with 2pcs Clear,1pc Smoke, 1pc Amber & 1pc Clear, 1pc Smoke.
Dress the Amber glass for center.

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

SAFETY CABLE INSTALLATION INSTRUCTIONS

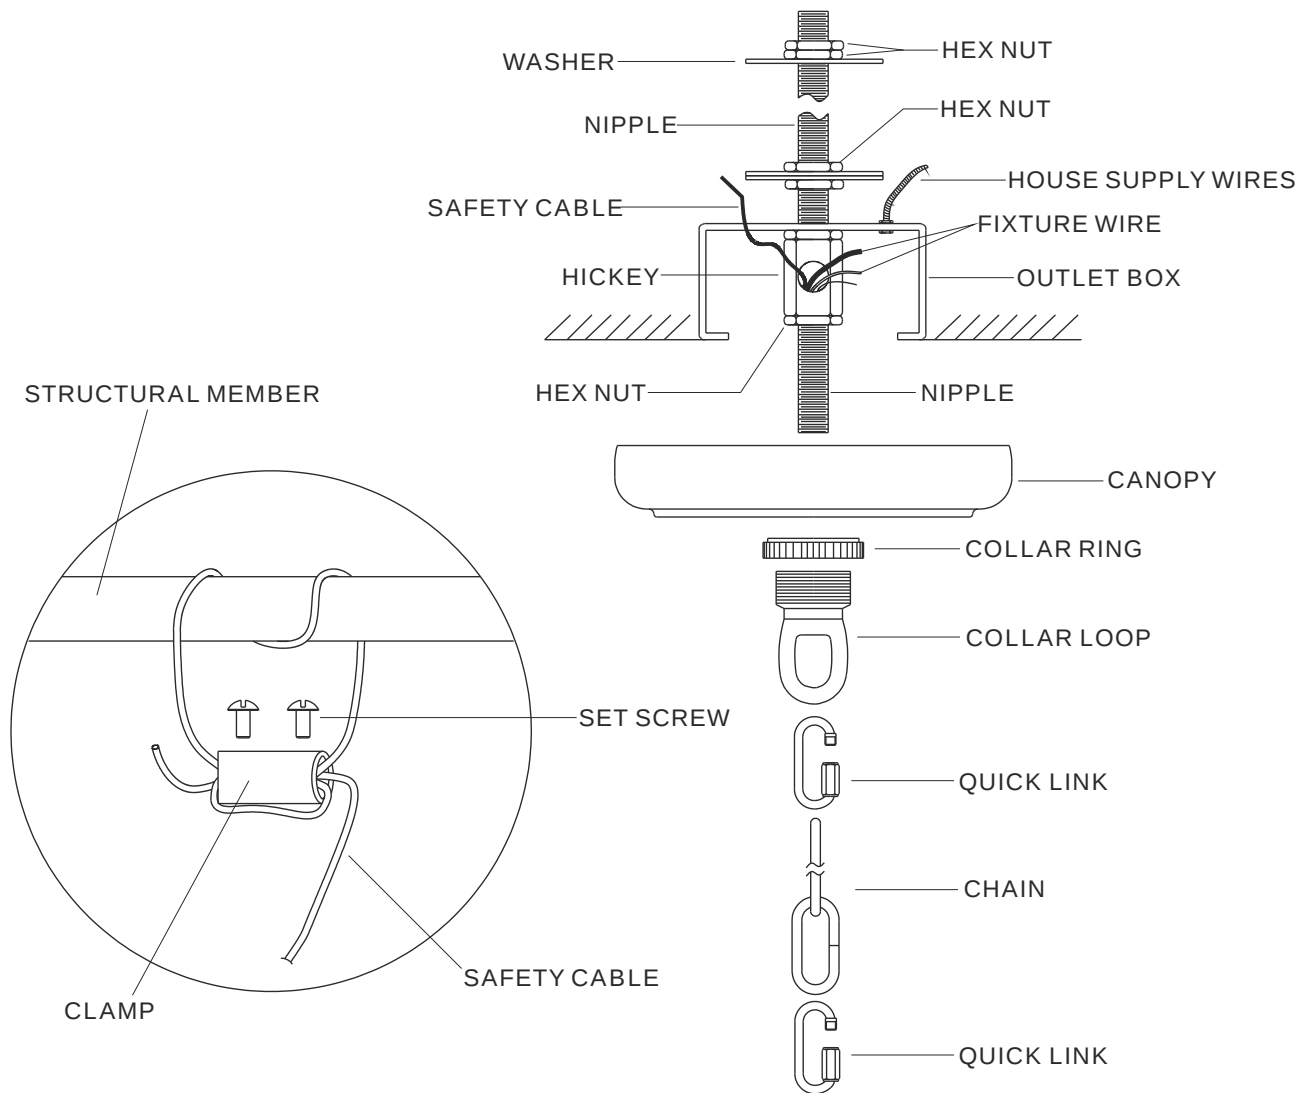

IMPORTANT:

FOR A SAFE AND SECURE INSTALLATION, THESE FIXTURES MUST BE INSTALLED BY MEANS OF SUPPORTS THAT ARE INDEPENDENT OF THE OUTLET BOX.

SUGGESTED INSTALLATION:



1. Provide a 1/4 IPS pipe with one end securely mounted to a beam or a structural member. The other end should protrude through the center of the outlet, as shown.
2. Assemble the screw collar loop, nipple, hex nuts and hickey to center 1/4 IPS support pipe and adjust overall length to allow the collar ring to hold the canopy flush to the ceiling. When the adjustments have been completed secure the hex nut, as shown.
3. Use one quick link to connect fixture loop and the bottom of chain. Slide the screw collar ring over the upper end of the chain, through the (Finished side down). Then use another quick link to connect collar loop and the top of chain.
4. Lace the fixture wires, ground wires and safety cable through the chain and screw collar loop, exiting through the side of HICKEY. Proceed to attach the FIXTURE GROUND WIRE to HOUSE GROUND WIRE using wire connector. Using wire connectors, connect the HOUSE WHITE WIRE to the FIXTURE SUPPLY WIRE (WHITE OR RIBBED SIDE); connect the HOUSE BLACK (or RED) WIRE to the FIXTURE SUPPLY WIRE (BLACK or SMOOTH SIDE). Wrap all connectors with approved electrical tape. Wrap safety cable around outlet box brace and pull cable taut. Secure cable with the clamp and (2) set screws provided, as shown.
5. Push the CANOPY upward over the OUTLET BOX. Be sure that all wires are carefully tucked into the OUTLET BOX cavity. Secure canopy against ceiling by threading CANOPY LOCK RING onto the CANOPY LOOP. Tighten until snug.

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL# ADD-329-CH-AU

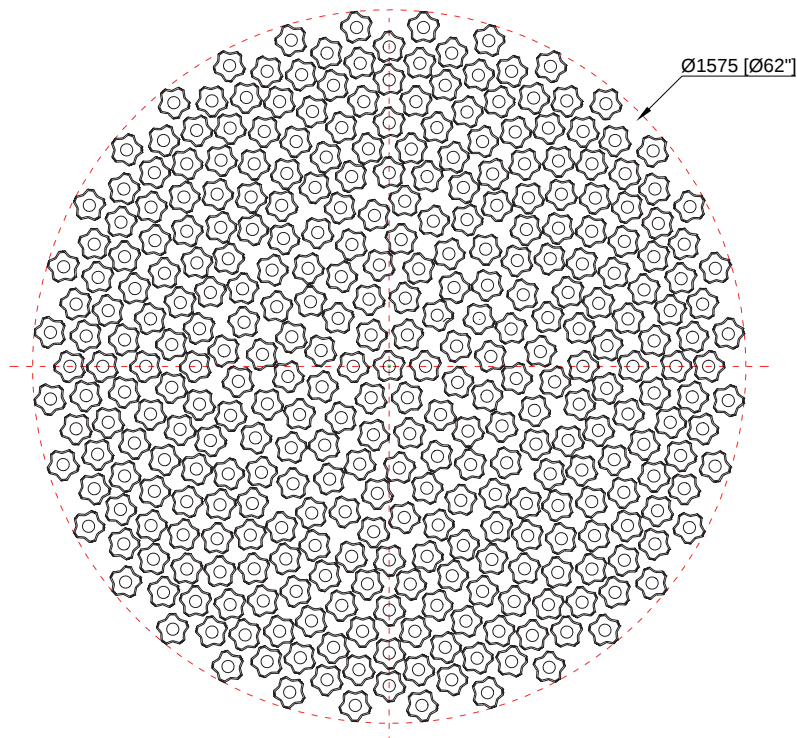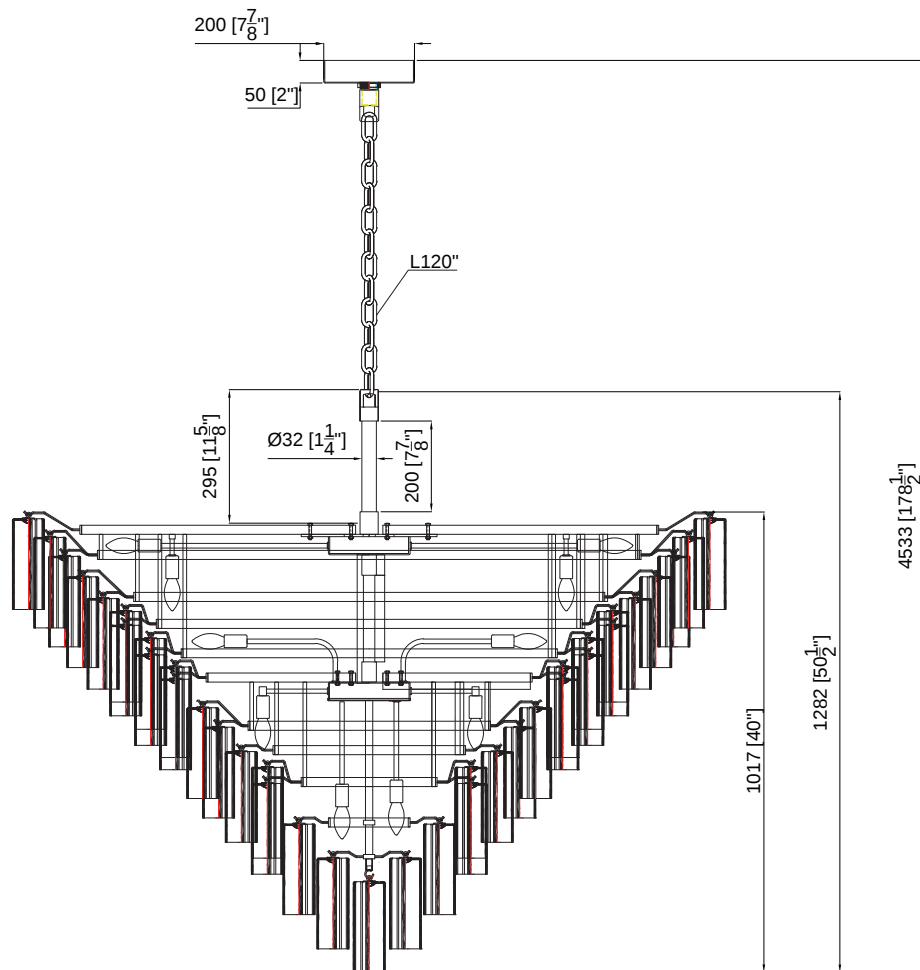

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

ASSEMBLY INSTRUCTION MODEL # ADD-329-CH-AU

Part Number

Part Numbers

A. Mounting hardware includes

- (1)-Long threaded nipple
- (1)-Short thread nipple
- (3)-Metal washer
- (7)-Hex nut
- (1)-Hickey

- B. (1)-Collar loop
- C. (1)-Canopy, D7 7/8"H2"
(XBN327CHCAN8IN)
- D. (1)-Collar ring
- E. (2)-Quick link
- F. (1)-Chain, D5/16"L120"
(XBN327CHCHA8MM)
- G. (1)-Fixture loop
- H. (1)-Rod, D1 4/1"L9 7/8"
(XBN329CHROD9.875IN)
- I. (1)-Coupler 1
- J. (1)-Frame A
- K. (169)-Clear glass, D2 3/4xL7 3/4"
(XBN300CHCLGLA7.75IN)
- (85) - Smoke glass, D2 3/4xL7 3/4"
(XBN300CHSMGLA7.75IN)
- (85) - Amber glass, D2 3/4xL7 3/4"
(XBN300CHAMGLA7.75IN)
- L. (1)-Down rod + coupler, L7 1/2"+L2 3/4"
- M. (1)-Frame B
- N. (1)-Coupler 2
- O. (1)-Light cluster
- P. (1)-Coupler 3
- Q. (1)-Stem, D5/8"L9 1/4"
- R. (1)-Frame C

