


ASSEMBLY INSTRUCTION MODEL #BEL-A8063-TZ




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 3 – Cand.BULB
60 Watts Max Bulb not included
USE LED BULBS FOR EXTENDED USE
This fixture is wet rated

How to Install

1. Take the bottom cage down by removing the screws at the top.
2. Remove the L-shaped bracket by unscrewing the screws.
3. Insert two glass panels on adjacent sides of the bottom cage. While holding the glass, take a bracket and align the hole on the bracket with the hole on the cage. Tighten a screw into the hole to secure the glass. Do not overtighten the screws to prevent the glass from breaking. Repeat for the remaining two glass panels.
4. Install the bulbs into the socket.
5. Put the bottom cage back onto the top cover and secure it with the cap nuts.
6. Hold the mounting plate over the outlet box and mark the wall at the center of each of the four mounting holes.
7. Drill four holes at the marked points and insert the wall anchors.
8. Attach the mounting plate over the outlet box using two outlet box screws. Insert the anchor screws into the wall anchors to tighten it.
9. Install the back plate onto the mounting plate and secure it with screws.

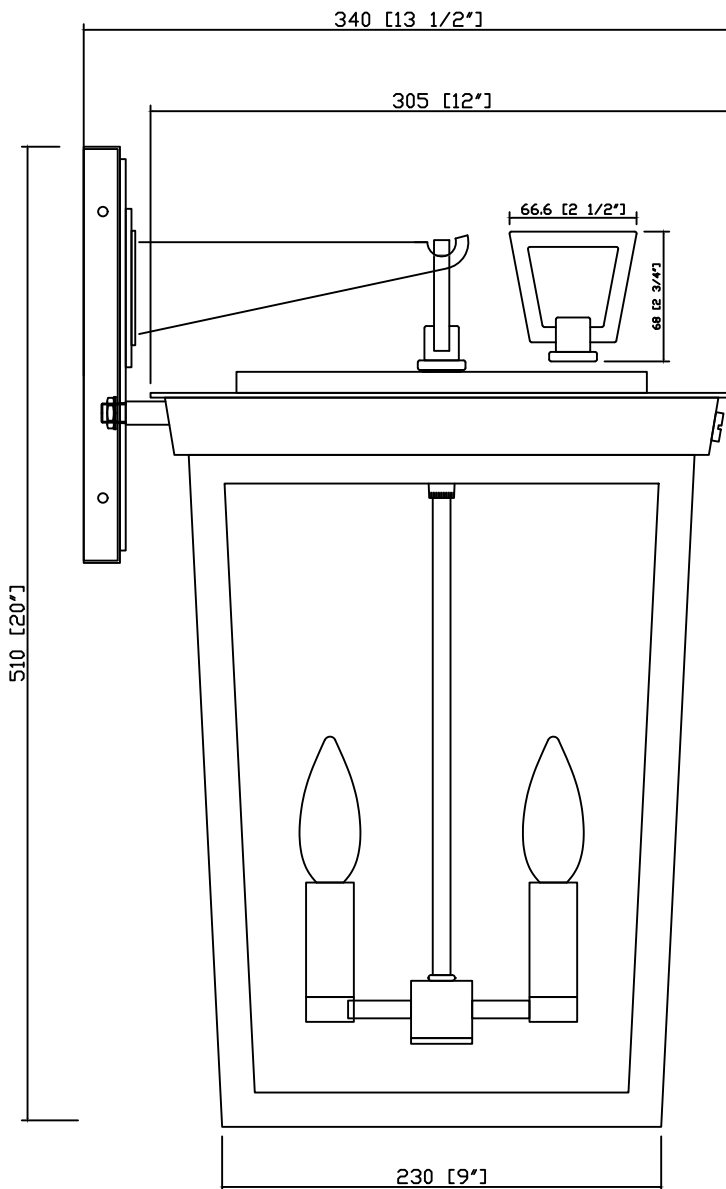


For installation of mounting plate:

1. Hold the mounting plate over the outlet box and mark the wall at the center of each of the four mounting holes.
2. Drill four holes at the marked points and insert the wall anchors.
3. Place the mounting plate over the outlet box and secure it with the outlet screws. Insert the wall anchor screws inside the wall anchors and tighten it.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

PART NUMBER MODEL #BEL-A8063-TZ

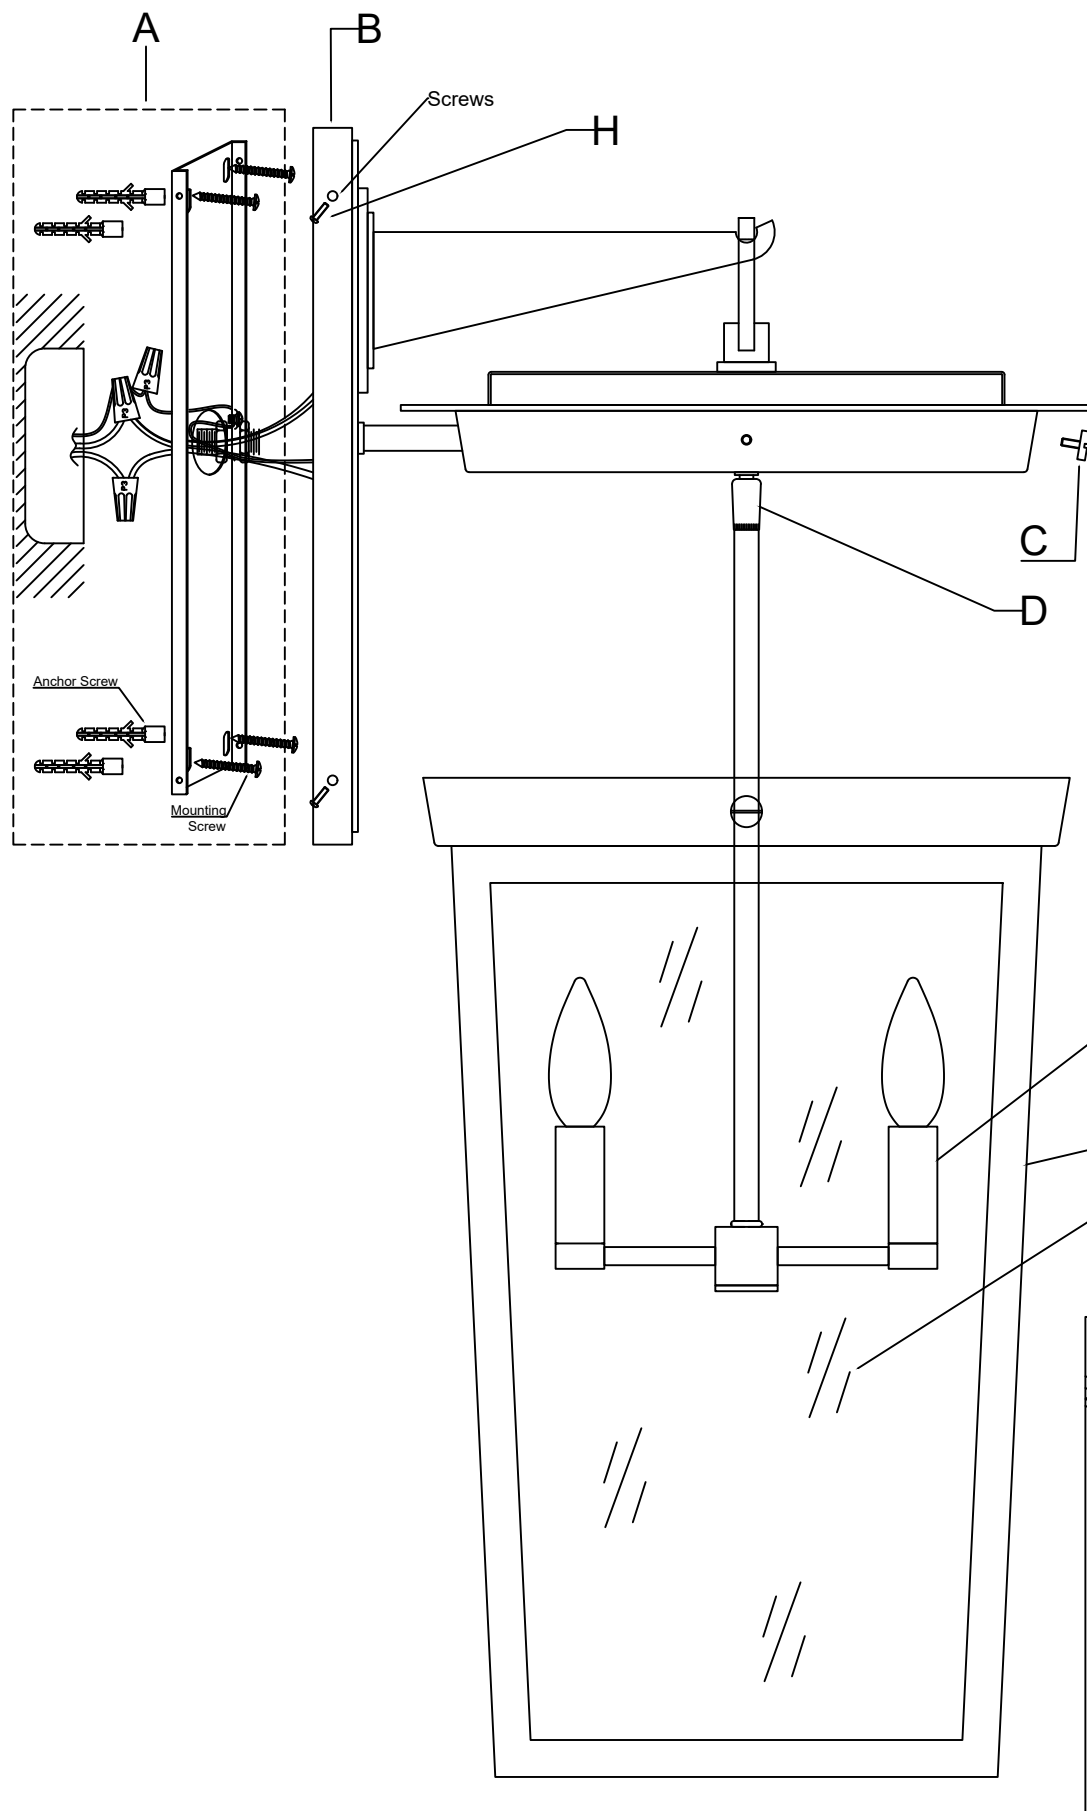

Part Number

Part Numbers

- A. Mounting Hardware
 - (3)-Wire Nut
 - (1)-Mounting Plate
 - (4)-Anchor Screw
 - (2)-Mounting Screw
 - (1)-Green Ground Screw
 - (6)-Outlet box screw
- B. (1)-Back plate;6"x8.75"x0.8";
(XAR8063TZBKP8.6IN)
- C. (3)-Cap nut
- D. (1)-Swivel(the max degree 15°)
- E. (3)-Socket
- F. (1)-Glass frame;
(XAR8063TZFRAME)
- G. (4)-Glass;
(XAR8063GLA13.5IN)
- H. (4)-Screws