




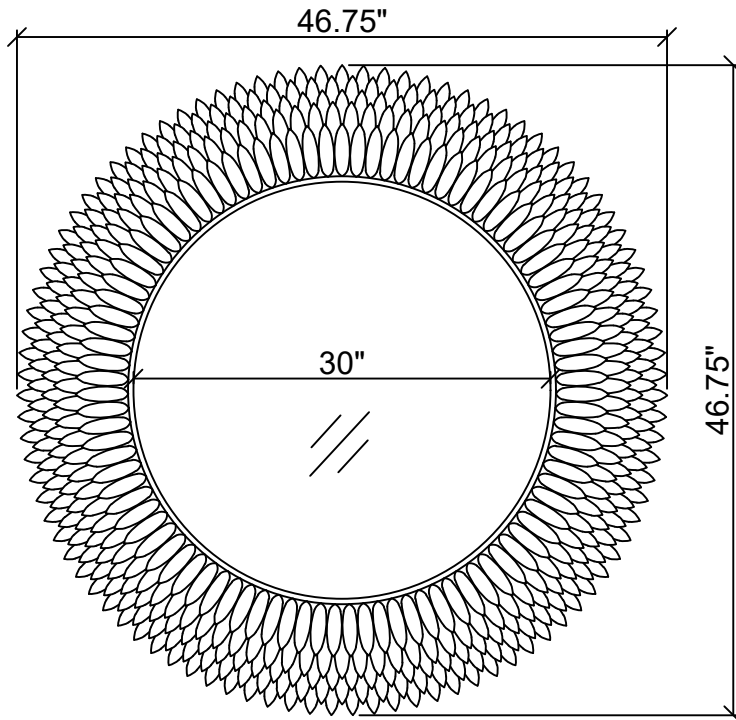

1. Place the glass suction cup firmly against the surface of the mirror and make sure it is fully attached.
2. Gently pull on the suction cup to confirm that it is securely fastened to the mirror.
3. Grasp the handles of the suction cups with both hands and lift it simultaneously.

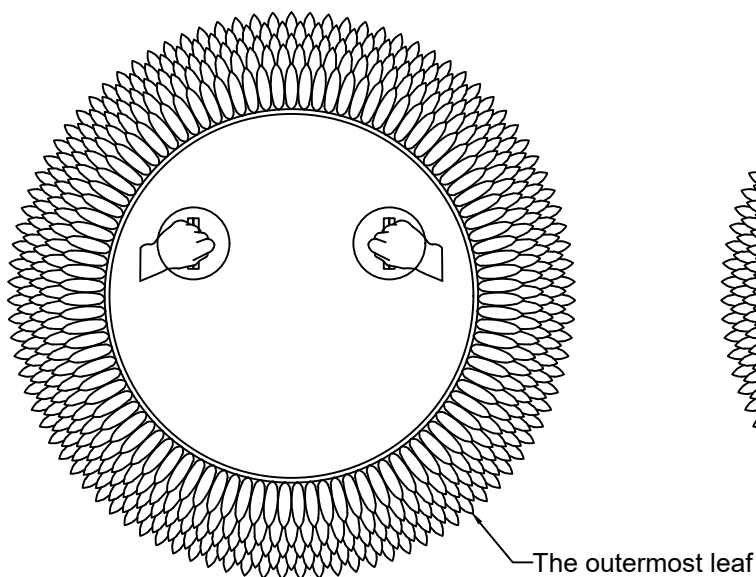

FRONT VIEW

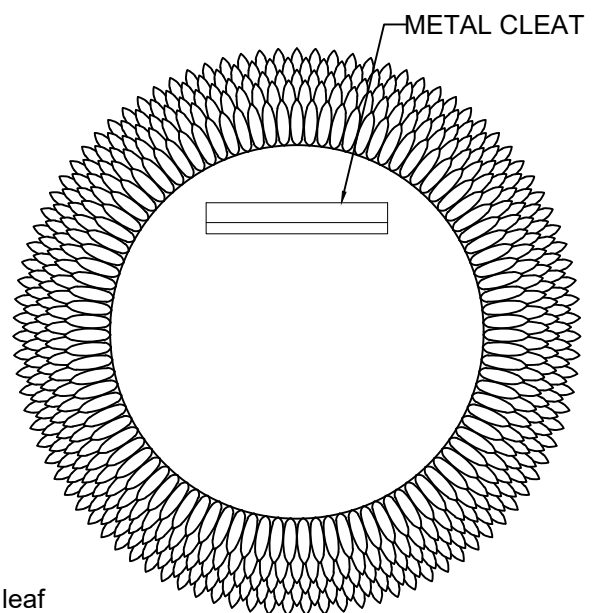

BACK VIEW

INSTALLATION INSTRUCTIONS

ITEMS INCLUDED





Anchor(A):  Ø7.5[mm]x36[mm]x4 Wall cleat:

Screws(B):  Ø4[mm]x40[mm]x4

 x1

NECESSARY TOOLS (NOT INCLUDED)

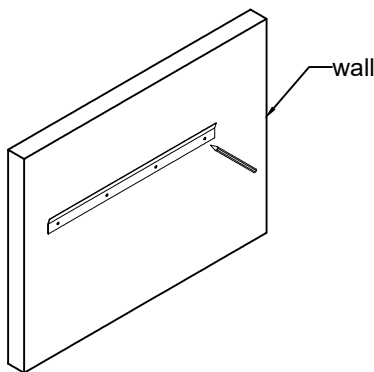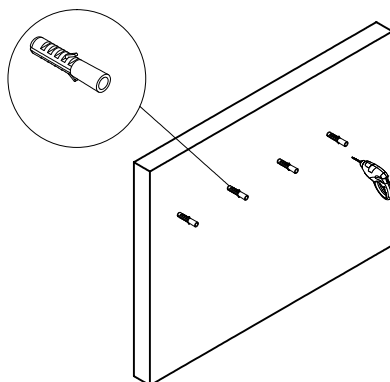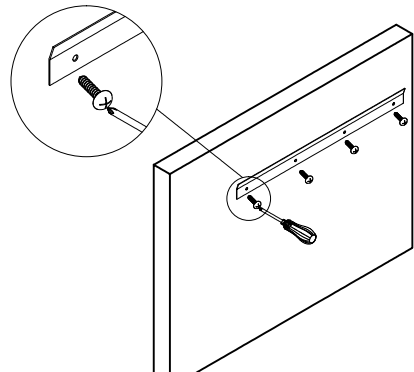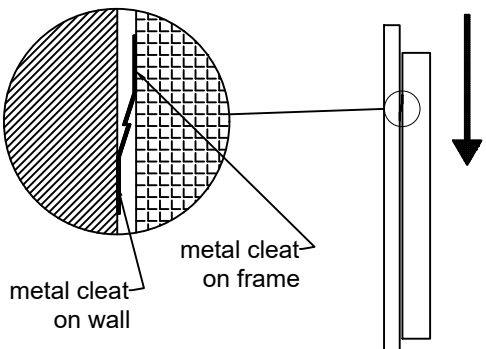

	Step 1 Place the metal cleat at the desired wall location and mark the points at the center of the hole on the metal cleat using the pencil.
	Step 2 Drill the holes at the marked points and insert the anchors into the hole.
	Step 3 Mount the metal cleat onto the wall surface using the screws supplied. Make sure that the metal cleat is straight using a level.
	Step 4 Align the mirror with the metal cleat mounted on the wall and carefully push it into place to secure it.