


CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #ESM-4005-AG-BL

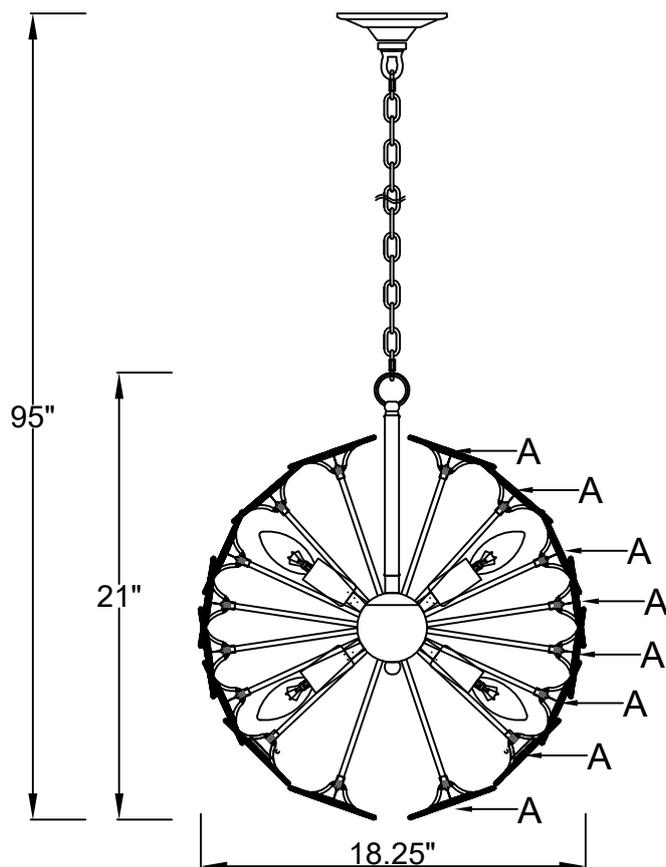

WARNING:
Electrical Danger Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 6-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE
This fixture is Dry rated

How to Install

1. Slide one check ring over the coupler on top of frame. Screw the threaded pipe into the coupler and slide the metal tube over the threaded pipe. Slide another check ring over the top of metal tube and secure with fixture loop.
2. Decide the preferred hanging height and choose the correct length of chain needed.
3. Install the mounting strap onto the outlet box.
4. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy over the outlet box using the collar ring.
5. Screw the small rods onto the frame then install the glass as illustrated and secure it with the glass ball nut.

DETAILED ILLUSTRATION



Glass Sets

A. 42Sets. (1)100mm

Please note: The glass should not be cleaned by an abrasive cleaner to prevent the glass from being scratched.

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov


CRYSTORAMA



Crystorama.com

LIGHTING THE WAY FOR SIXTY YEARS

PART NUMBER MODEL #ESM-4005-AG-BL

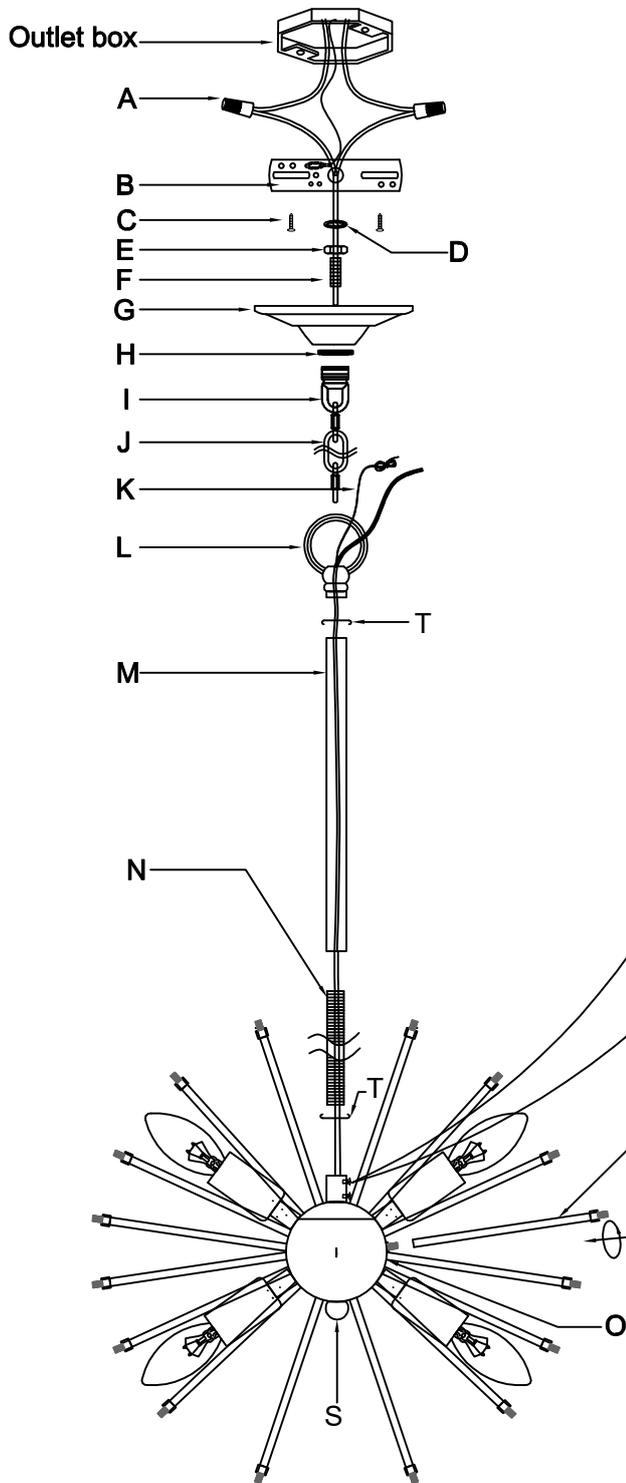


Part Number

Part Numbers


- A. (2)-Wire Connector
- B. (1)-Mounting Strap
- C. (2)-Outlet Box Screws
- D. (1)-Lock washer
- E. (1)-Hex Nut
- F. (1)-Nipple
- G. (1)-Canopy; w5" x h1.25" (XFB4006AGCAN5IN)
- H. (1)-Collar Ring
- I. (1)-Collar Loop
- J. (1)-Chain; 72", 3.8mm (XFB4005AGCHA3.8MM)
- K. (1)-Ground Wire
- L. (1)-Fixture Loop
- M. (1)-Metal Tube; 6.5", 16MM thickness
- N. (1)-Threaded Pipe; 10.6", 12MM thickness
- O. (1)-Frame
- P. (42)-Small rod; 5.3", 5.6MM thickness
- Q. (84)-Washer
- R. (42)-Glass Ball Nut (XFB4006AGGBANUT)
- S. (1)-Finial(XFB4006AGFINIAL)
- T. (2)-Check Ring

PART BAG I : Includes Parts A, C

PART BAG II : Includes Parts B, D, E, F, H, I



Before screwing the threaded pipe, please loosen the set screws on the side of the coupling, tighten it when the threaded pipe is screwed all the way down.



Add an extra plastic washer to secure the glass if one is not enough.

