


CRYSTORAMA LIGHTING



Crystorama.com

ASSEMBLY INSTRUCTION MODEL # FUL-917-BK

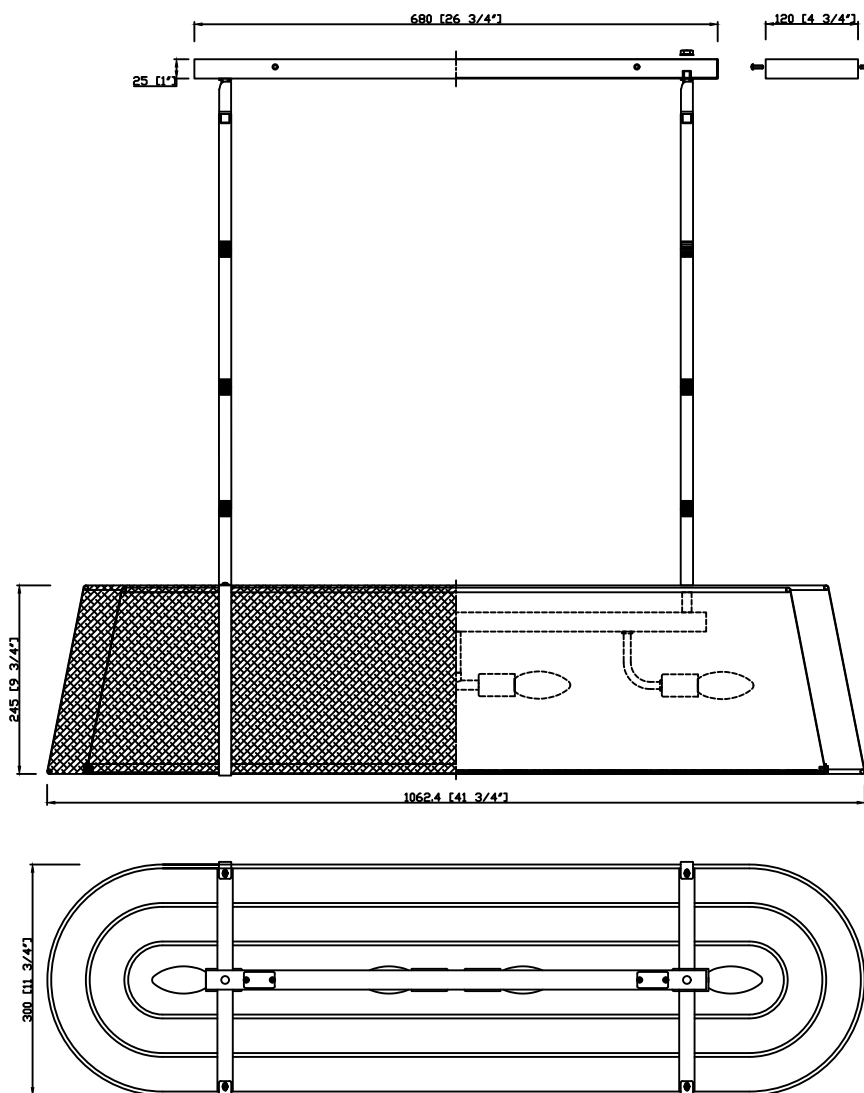

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4 - Cand.Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS Dry RATED

How to Install

1. Decide the preferred hanging height and choose the correct length of rods needed.
2. Feed the wire through the rods and screw them together.
3. Remove the swivel from canopy by loosening the hex nut. Screw one end of the rod assembly onto the top of the frame and the other end onto the swivel. Place the canopy over the swivel and tighten the hex nut to secure the swivel. Make sure that the slot on both swivels face same direction.
4. Install the bulb onto the socket.
5. Loosen the mounting plate from the canopy, and place it over the outlet box and mark four points on the ceiling at the same distance as the hole on the mounting plate.
6. Drill holes at the marked points and insert the wall anchors into the hole. Attach the mounting plate over the outlet box using the anchor screws.
7. Raise the frame up to the ceiling and do the wire connections. Secure the canopy onto the mounting plate using the screws.



WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

PART NUMBER MODEL # FUL-917-BK

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR917BKCAN26.75IN)
- C. (2)-Swivel
- D. (6)-Long Hang rod Ø0.75*12"
XAR917BKROD12IN
- E. (2)-Short Hang rod Ø0.75**6"
XAR917BKROD6IN
- F. (1)-Frame
- G. (1)-Fabric Shade;L41.75*W11.75**H9.75
XAR917SHA41.75IN
- H. (1)-Bottom ring;37.75**8.25"
- I. (4)-Screws
- J. (1)-diffuser
- K. (4)-Metal band
- L. (4)-Wall anchor
- M. (4)-anchor screw

