



CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com


ASSEMBLY INSTRUCTION MODEL#GID-4015-MK-VG



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 2-Medium Base Bulb 60 Watts
Recommended 100 Watts Max frosted bulb.
USE LED BULBS FOR EXTENDED USE
This fixture is Damp rated

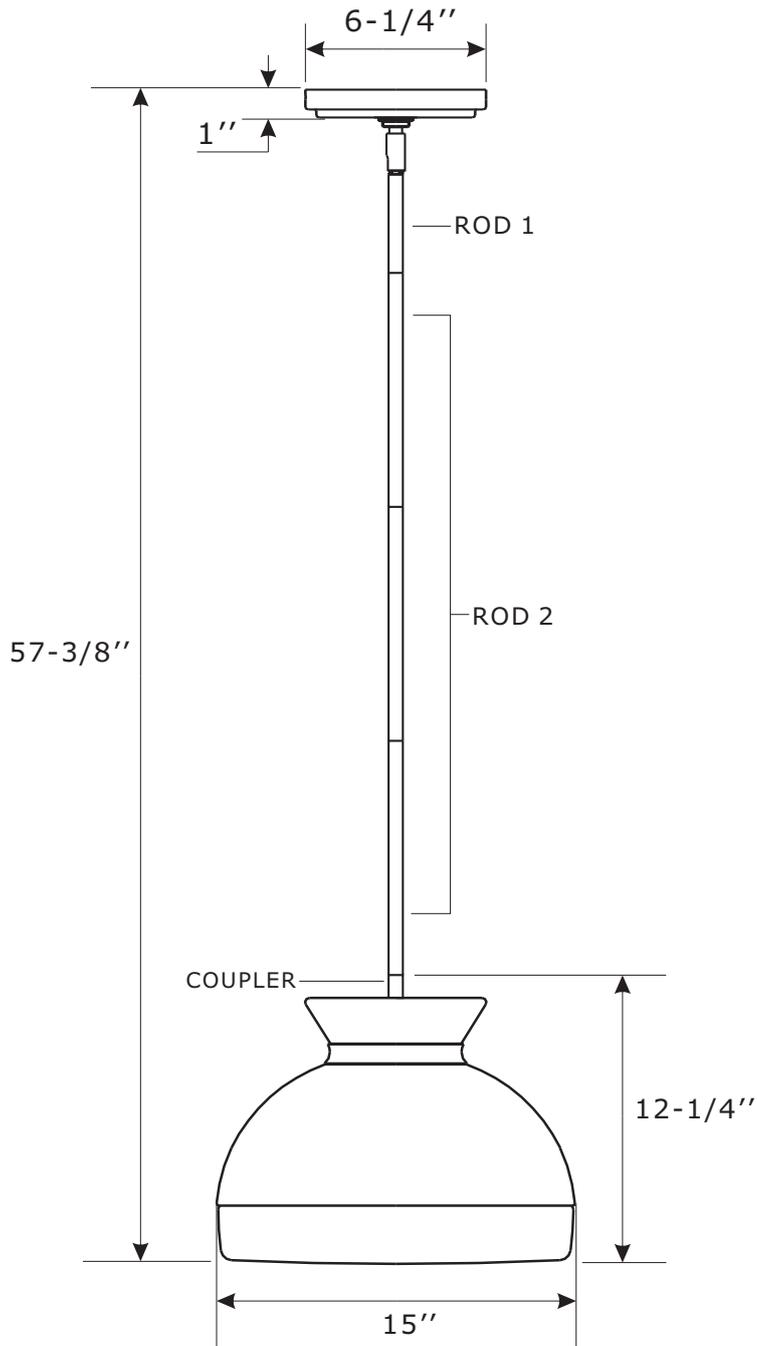


How to install

1. Determine the preferred hanging height and choose the correct length of rods needed.
2. Feed the wires through the rods and connect them together.
3. Slip collar ring and canopy over the rod assembly.
4. Slip mounting bar with swivel along wire and thread it into the top of the rod assembly.
5. Raise fixture up and attach mounting bar to the outlet box using two outlet box screws.
6. Slide collar ring up to canopy and thread it onto the screw collar, securing the canopy.
7. Install the bulb(not included) into the socket.
8. Raise the glass shade to the metal shade and align the stud to the slot, then twist the glass shade clockwise to secure it.

HOW TO REPLACE THE BULB

1. Twist the glass shade counter clockwise to take it off for bulb change.

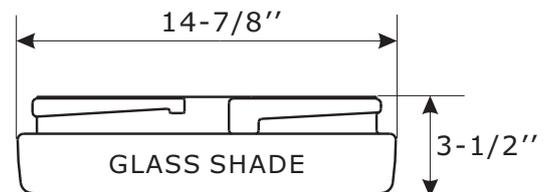

WARNING: This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



ASSEMBLY INSTRUCTION MODEL#GID-4015-MK-VG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy W6-1/4"xH1" #XRF4015MKVGCAN6.25IN
- C. (1)-Short rod D5/8"xL6" #XRF4015MKVGRD6IN
- D. (3)-Long rod D5/8"xL12" #XRF4015MKVGRD12IN
- E. (1)-Glass shade W14-7/8"xH3-1/2" #XRF4003GLA15IN

