


Technical drawing of a mechanical component, likely a flange or coupling, showing dimensions in inches and millimeters. The drawing includes a side view and a top view.

Dimensions:

- Overall height: 349.5 [13 3/4"]
- Inner diameter: $\varnothing 120$ [4 3/4"]
- Outer diameter: $\varnothing 130$ [5"]
- Flange thickness: 23 [1"]
- Top view outer diameter: 192.7 [7 1/2"]
- Top view inner diameter: $\varnothing 137.4$ [5 1/2"]


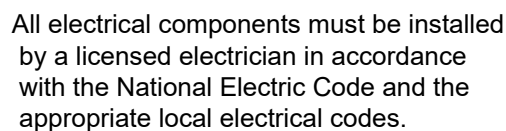


You will need 2 - Cand.Bulb
40 Watts Recommended 60 Watts Max
USE LED BULBS FOR EXTENDED USE

THIS FIXTURE IS DAMP RATED

How to Install

1. Remove the mounting plate from the backplate and install the mounting plate onto the outlet box using the two outlet box screws.
2. Place the backplate over the mounting plate and secure with the screws.
3. Unscrew the candle sleeve from the socket and put the glass shade over the socket.
4. Install the candle sleeve to the socket and secure the glass shade.
5. Install the bulb onto the socket.

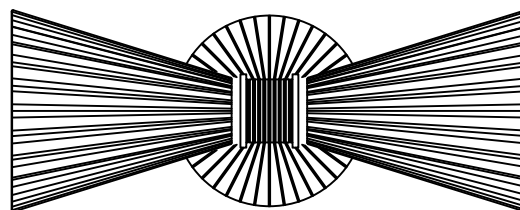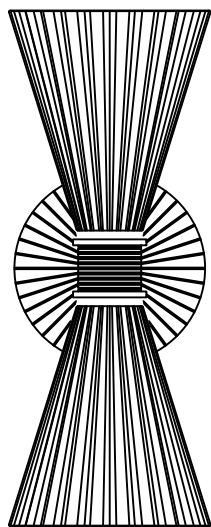

 **WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

PART NUMBER MODEL # LOT-702-LG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (3)-screws
- C. (1)-Back plate (XAR701LGBKP5IN)
- D. (1)-Fixture arm
- E. (2)-Glass (XAR701GLA5.5IN)
- F. (2)-Candle sleeve(XAR701LGCDL2.25IN)

