



ASSEMBLY INSTRUCTION MODEL #TRL-2807-LG




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 11 - 3.5 Watts G9 LED bulb included
THIS FIXTURE IS Damp RATED

How to Install

1. Decide the preferred hanging height and choose the correct length of rod needed.
2. Pass the wire through the rod, collar loop ring, canopy and swivel kit. Screw the rods together and connect one end of the rod assembly onto the top of the fixture and the other end onto the swivel
3. Install the mounting bracket onto the outlet box.
4. Raise the fixture up to the ceiling and do the wire connection. Screw the canopy with the collar loop ring.
5. Install the bulb (included) into the socket.
6. Screw the glass onto the socket.

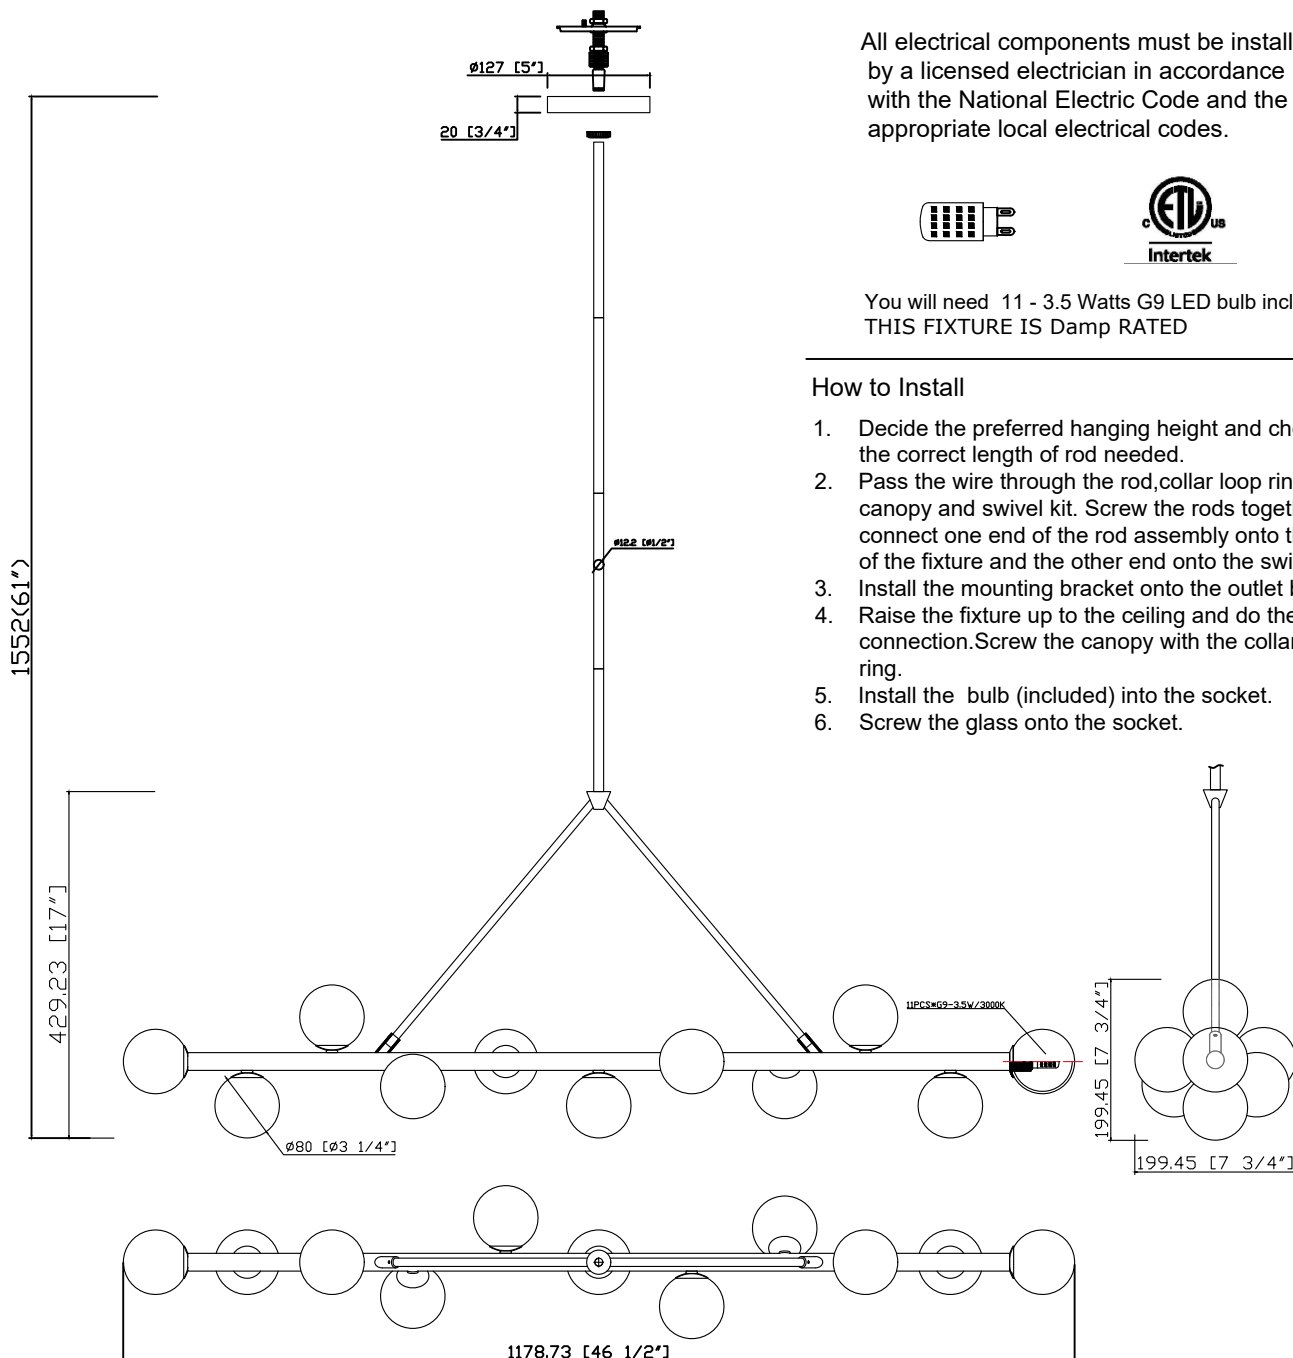

WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



PART NUMBER MODEL #TRL-2807-LG

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Canopy (XAR2807LGCAN5IN)
- C. (1)-Collar loop ring
- D. (1)-Swivel with collar loop
- E. (3)-Down rod 0.5"×12"
(XAR2807LGROD12IN)
- F. (1)-Down rod 0.5"×6"
(XAR2807LGROD6IN)
- G. (2)-hang rod
- H. (2)-Set screw
- I. (1)-Frame
- J. (11)-G9 LED bulb
- K. (11)-Glass
(XAR2807LGGLA3.25IN)

