

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Ice Cube

Square Multi Light 4CCT

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------------------|--------------------------------|------|--------|---------------------------|
| PD-29313S 8" - 13 Lights | 2 700K/3000K/3500K/4000K 90 | 93 W | 4970 | AB Aged Brass BK Black |

Example: **PD-29313S-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES


- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS


| | |
|---------------|--|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120-277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Steel frame with K9 crystal diffuser |



FINISHES:



LINE DRAWING:

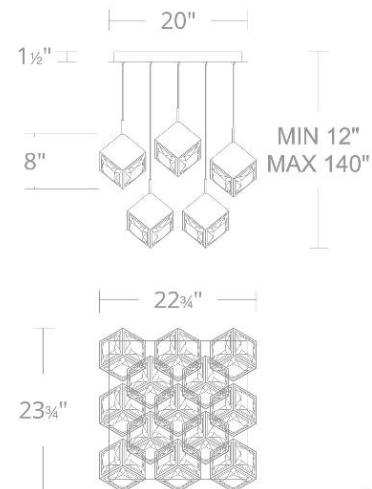

PD-29313S

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Ice Cube

Square Multi Light 4CCT

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------------------|--------------------------------|-------|--------|---------------------------|
| PD-29325S 8" - 25 Lights | 2 700K/3000K/3500K/4000K 90 | 180 W | 9640 | AB Aged Brass BK Black |

Example: **PD-29325S-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS

| | |
|---------------|--|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120-277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Steel frame with K9 crystal diffuser |




FINISHES:



Black Aged Brass

LINE DRAWING:

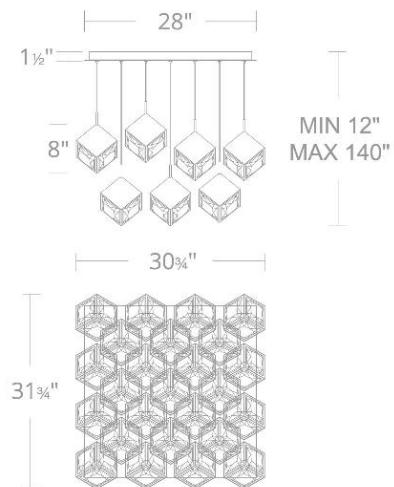

PD-29325S

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Ice Cube

Square Multi Light 4CCT

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------------------|--------------------------------|-------|--------|---------------------------|
| PD-29341S 8" - 41 Lights | 2 700K/3000K/3500K/4000K 90 | 294 W | 15870 | AB Aged Brass BK Black |

Example: **PD-29341S-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 13, 25, & 41 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS


| | |
|---------------|--|
| Color Temp: | 2700K/3000K/3500K/4000K |
| Input: | 120-277V,50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life: | 50000 Hours |
| Standards: | ETL, cETL Damp Location Listed |
| Construction: | Steel frame with K9 crystal diffuser |



FINISHES:



LINE DRAWING:

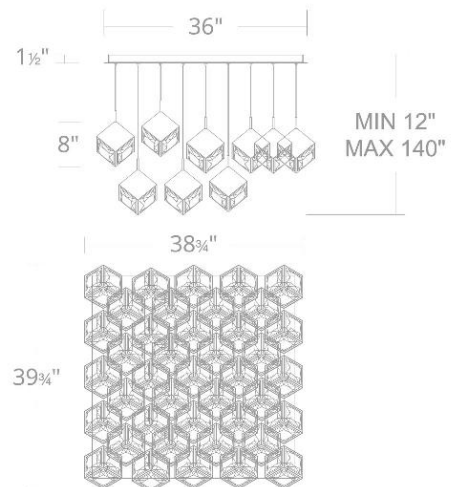

PD-29341S