dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Lune

Wall Sconce 3000K

Model & Size	*Color Temp & CRI*	*Watt*	*Voltage*	*LED Lumens*	*Delivered Lumens*	*Finish*
❍ WS-15010 10"	3000K 90	10W	120-277 VAC	532	512	❍ AL Aluminum ❍ BK Black

Example: **WS-15010-AL**

DESCRIPTION

Adjusts to enhance upward or downward indirect illumination. Pairs well with complementing adjustable pendants.

FEATURES

- Rectangular shape
- Driver located in standard 2" X 4" junction box
- Light bar is 350 degree adjustable
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL
	Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser

FINISHES



Aluminum Black

LINE DRAWING

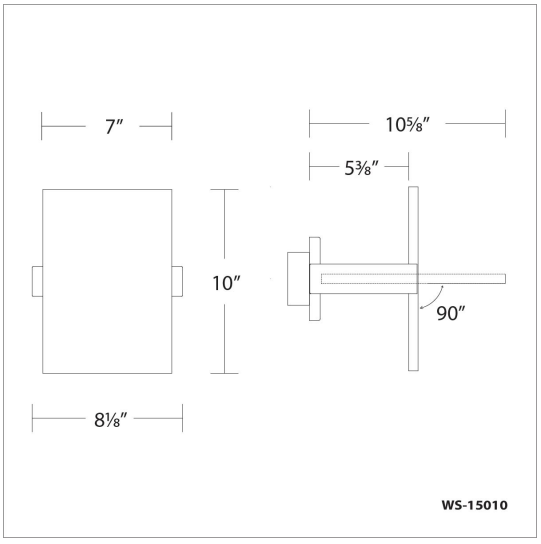

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. February 2020