




Fixture Type:

Catalog Number:

Project:

Location:

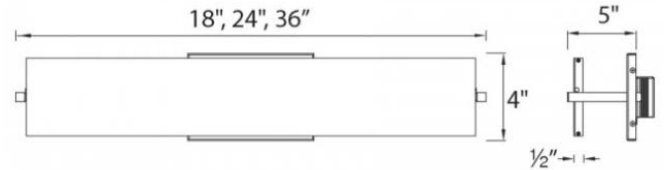

PRODUCT DESCRIPTION

Ultra-thin edge-lit led panels provide a downward task light free of any hot spots as well as an upward ambient illumination. Even better, the design can be rotated around to provide direct or indirect illumination as the needs arise when installed in a bath.

FEATURES

- Ultra-thin light-extraction panel and edge-lit acrylic diffuser
- Adjust rotating panel for indirect, up, down or task lighting
- Can be mounted vertically or horizontally
- 2" x 1.38" x 1.02" transformer installs within junction box

SPECIFICATIONS

- Color Temp:** 2700K, 3000K
- CRI:** 90
- Dimming:** 100% - 10% ELV
- Rated Life:** 80,000 hrs
- Construction:** Aluminum with acrylic diffuser
- Finish:** Brushed Aluminum, Brushed Black
- Standards:** ETL & cETL listed, Damp listed

ORDER NUMBER

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish
WS-6718-27	18	16W	1004	770	AL <i>Brushed Aluminum</i> BK <i>Brushed Black</i>
WS-6718-30	18"	16W	1109	850	
WS-6724-27	24"	22W	1339	1035	
WS-6724-30	24"	22W	1478	1140	
WS-6736-27	36"	29W	2009	1380	
WS-6736-30	36"	29W	2218	1520	

Example: **WS-6724-30-AL**

For 277V, add an "F" before the finish: **WS-6718F-30-BK**