

WAC LIGHTING

Super Star

Linear Pendant 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-15547 47"	3000K/3500K/4000K/5000K	BK Black BN Brushed Nickel	22.4W	2000	1699

Example: **PD-15547-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Super Star turns light into art. Faceted K5 crystals alternate with sleek metal accents in a sculptural linear form, each crystal rotatable to shape your own luminous rhythm. This statement pendant combines brilliance and precision with high-performance LED illumination.

FEATURES

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K/5000K
- Option to pre-select color temperature or adjust in the field
- Rotatable K5 Crystal
- May be mounted on a sloped ceiling
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K/3500K/4000K/5000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body with K5 crystal



FINISHES:



LINE DRAWING

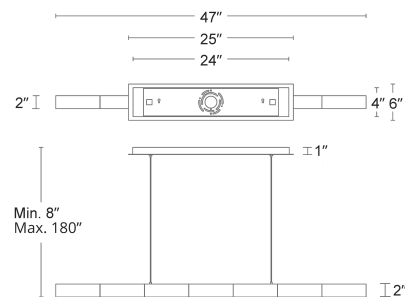

PD-15547

WAC LIGHTING

Super Star

Linear Pendant 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-15560 60"	3000K/3500K/4000K/5000K	BK Black BN Brushed Nickel	29.1W	2200	2023

Example: **PD-15560-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Super Star turns light into art. Faceted K5 crystals alternate with sleek metal accents in a sculptural linear form, each crystal rotatable to shape your own luminous rhythm. This statement pendant combines brilliance and precision with high-performance LED illumination.

FEATURES

- Built in color temperature adjustability. Switch from 3000K/3500K/4000K/5000K
- Option to pre-select color temperature or adjust in the field
- Rotatable K5 Crystal
- May be mounted on a sloped ceiling
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K/3500K/4000K/5000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body with K5 crystal



FINISHES:



LINE DRAWING

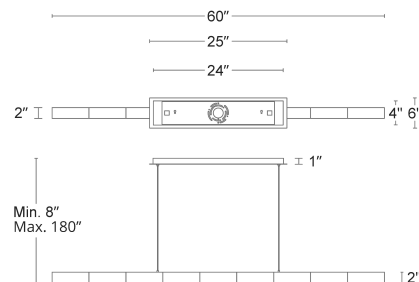

PD-15560