

WAC LIGHTING

Banded

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-68903L	2700K/3000K/3500K/4000K	AB Aged Brass BK Black	26W	2397	1287

Example: **PD-68903L-BK**
For custom requests please contact customs@wacighting.com

DESCRIPTION

A lustrous metallic band encircles an inner white diffuser, creating an elegant play of shadow and glowing illumination. Multiple Banded pendants are installed on a round canopy to make a modern statement in any space.

FEATURES

- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver included
- 5 Year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum hardware




FINISHES:



Aged Brass Black

LINE DRAWING:

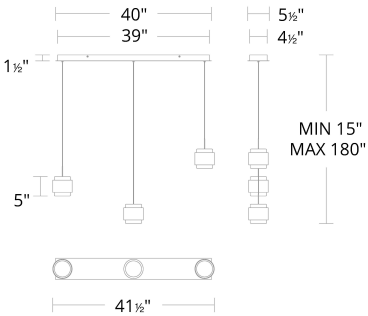

PD-68903L

WAC LIGHTING

Banded

Linear Multi Light 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-68905L	2700K/3000K/3500K/4000K	AB Aged Brass BK Black	50W	3995	2145

Example: **PD-68905L-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A lustrous metallic band encircles an inner white diffuser, creating an elegant play of shadow and glowing illumination. Multiple Banded pendants are installed on a round canopy to make a modern statement in any space.

FEATURES

- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver included
- 5 Year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum hardware

Fixture Type: _____

Catalog Number: _____

Project: _____


Location: _____



FINISHES:



LINE DRAWING:

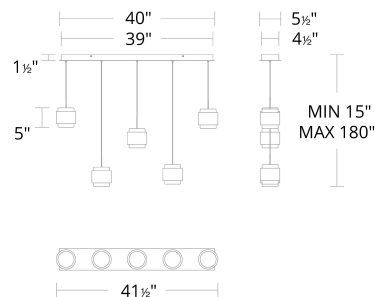

PD-68905L

WAC LIGHTING

Banded

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-68914L	2700K/3000K/3500K/4000K	AB Aged Brass BK Black	129W	11186	6006

Example: **PD-68914L-BK**
For custom requests please contact customs@wacighting.com

DESCRIPTION

A lustrous metallic band encircles an inner white diffuser, creating an elegant play of shadow and glowing illumination. Multiple Banded pendants are installed on a round canopy to make a modern statement in any space.

FEATURES


- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver included
- 5 Year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum hardware



FINISHES:



LINE DRAWING:

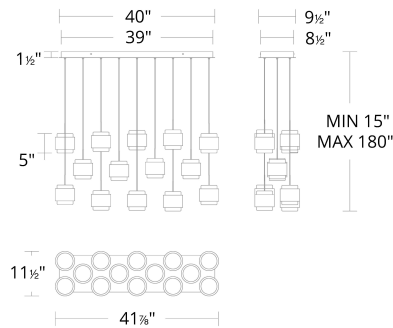

PD-68914L

WAC LIGHTING

Banded

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-68923L	2700K/3000K/3500K/4000K	AB Aged Brass BK Black	208W	18377	9867

Example: **PD-68923L-BK**
For custom requests please contact customs@wacighting.com

DESCRIPTION

A lustrous metallic band encircles an inner white diffuser, creating an elegant play of shadow and glowing illumination. Multiple Banded pendants are installed on a round canopy to make a modern statement in any space.

FEATURES

- Thin, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Driver included
- 5 Year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum hardware



FINISHES:



LINE DRAWING:

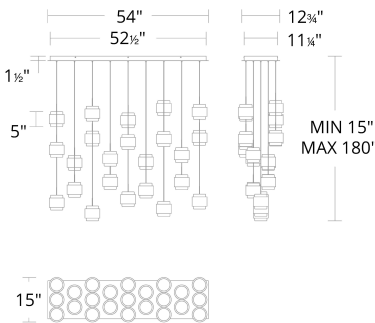

PD-68923L