

# Installation manual for 3503F22G

Dimensions :D21.7"xH5.1"

Collection: Monroe

Bulb Type: LED PCB 12W 3000K

Lamp Weight :8.8LBS Total Weight :10.56LBS



Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, please contact the retailer Where the purchased was made.



#### SAFETY

Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

#### CAUTION


- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit: 110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

#### Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions.

where you purchase from and any other relevant information ready, our customer service team will provide comprehensive and worry free service to our valued customers.

# Frame Assembly Diagram

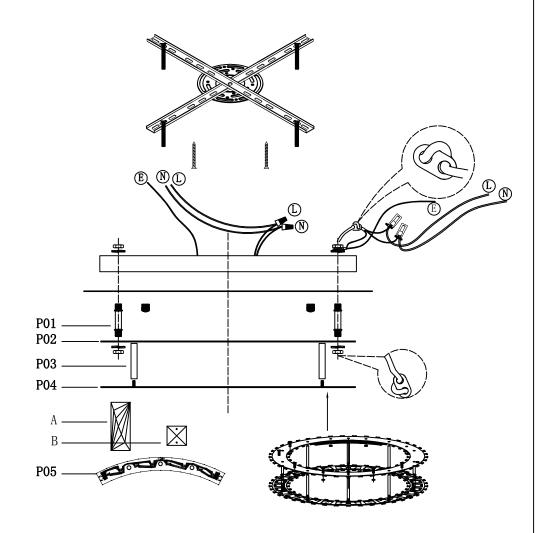

# $3503F22G \quad \text{ D21. 7"H5. 1"}$

# Step 1

Please use the partslist to ensure you are not missing any parts.

### PARTS LIST

Parts number	Picture	Description	Qty	Diagram number
MB9R31		Ceiling Plate	1	ZA
P-3503F22G-1		canopy	1	ZB
	•	M5 screw cap	4	ZD
P-3503F22G-2		screw ends pipe short	6	P01
		D19.6"upside S.S slice	1	P02
		2.4" metal pipe	6	P03
		D19.6"downside S.S slice	1	P04
	No. of the last of	4W high voltage LED PCB	6	P05
RC620-3-CL		1.2"*3"crystal	83	A
RC2020-30-CL	$\boxtimes$	1.2"*1.2"crystal	36	В
		(03)		

### 3503F22G D21.7"H5.1"


Parts number	Picture	Description	Qty	Diagram number

Parts number	Picture	Description	Qty	Diagram number
			+	
			+	
			-	
			1	

 $3503F22G \quad \text{ D21. 7"H5. 1"}$ 

Step 2


# Canopy Installation Instruction

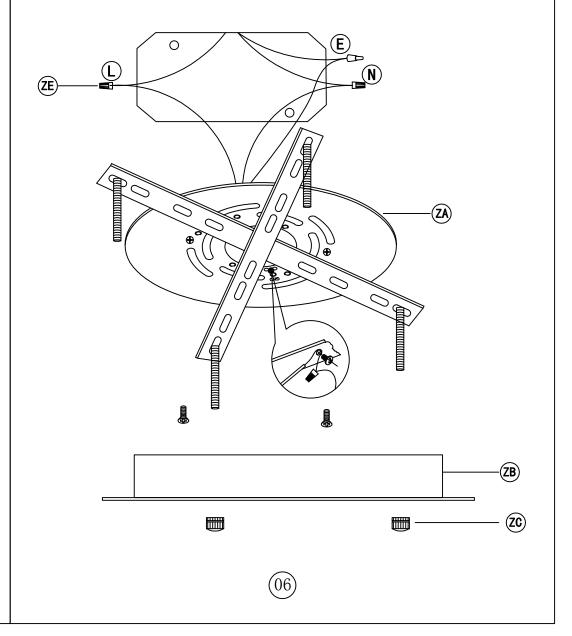

Frame Assembly Diagram

IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1. Use two screws (ZG) to fix the Ceiling Plate (ZA) on the ceiling; which are not supplied and should already be in your box.
- 2. Be sure when connecting the wire use electrician approved junction caps (ZE).
- 3. Stow the excess wire in the canopy (ZB).
- 4. Align the canopy (ZB) with the hanging plate screw, fix the lamp on the ceiling, tighten and fix it with a M5 screw cap (ZD).

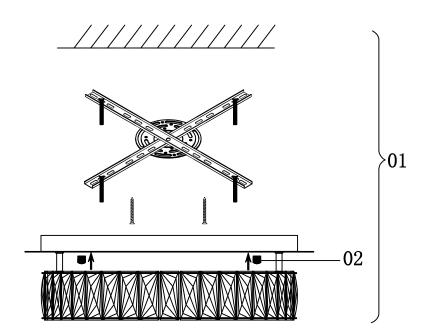


# Frame Assembly Instructions


### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Fixed the Ceiling Cover on the Mounting Bracket (01), then put the screws tightened.
- 2. Please unscrew the cap (02) of the expansion part before adjusting the line, and then screw on the cap after adjusting the line.

# Crystal Dressing Diagram



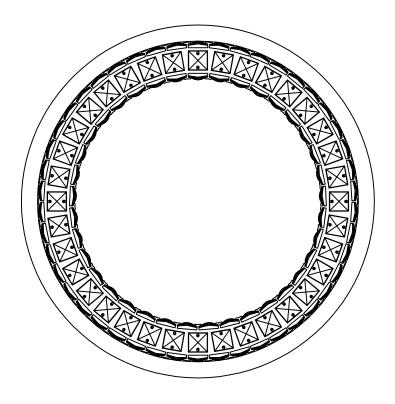


# Frame Assembly Instructions


### Installation:

Please read all instructions carefully. Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.

- 1. Fixed the Ceiling Cover on the Mounting Bracket (01), then put the screws tightened.
- 2. Please unscrew the cap (02) of the expansion part before adjusting the line, and then screw on the cap after adjusting the line.

# Crystal Dressing Diagram



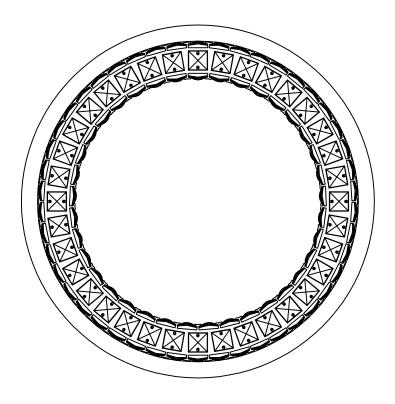

### Elegant Lighting Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of one (1) year from the date of purchase. Our company will, at its option, repair or replace any frame that has a defect in the materials or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department. A written return authorization form will be sent to you with specific instructions.

### Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department . Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reseserve the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warrantee, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.