


LEVON™ CUSTOM



MAD7912B** Ceiling Fan

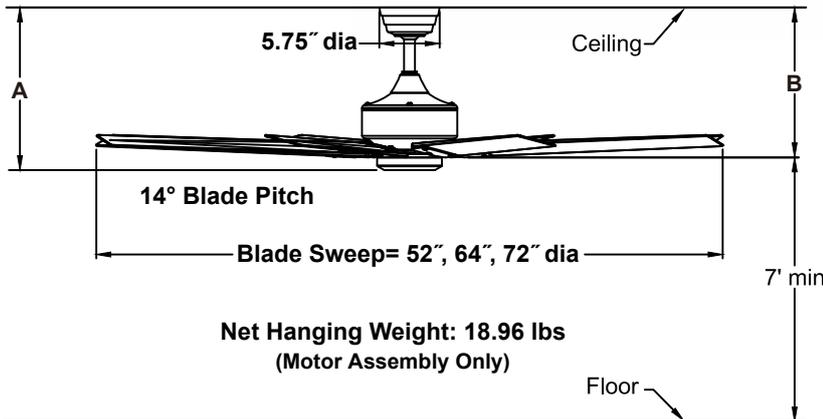

Available Finishes	
BL	Black
BN	Brushed Nickel
DZ	Dark Bronze
GR	Matte Greige
GZ	Galvanized
MW	Matte White

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-165NM sensorless DC motor is designed for optimal performance with this fan.

BLADES:

8 bladed blade sets are available in plastic and wood materials — all sold separately. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR7912 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

LK7912B- One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long downrod (DR1-6). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

	A	B
Fan w/6" downrod	15.58"	14.40"
Fan w/12" downrod	21.58"	20.40"
Fan w/18" downrod	27.58"	26.40"
Fan w/24" downrod	33.58"	32.40"
Fan w/36" downrod	45.58"	44.40"
Fan w/48" downrod	57.58"	56.40"
Fan w/60" downrod	69.58"	68.40"
Fan w/72" downrod	81.58"	80.40"