
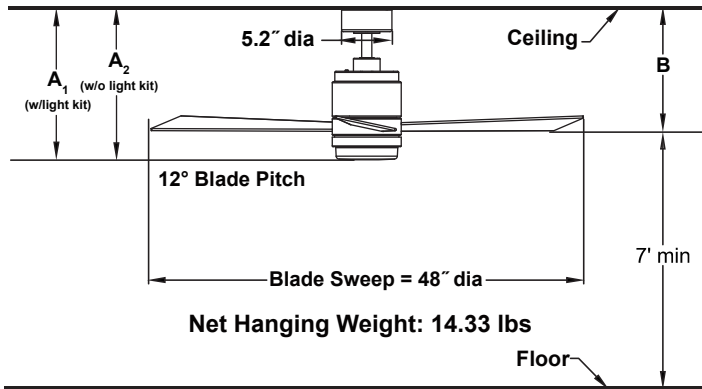


**PYLON™**

**LP8277\*\*  
48" Ceiling Fan**

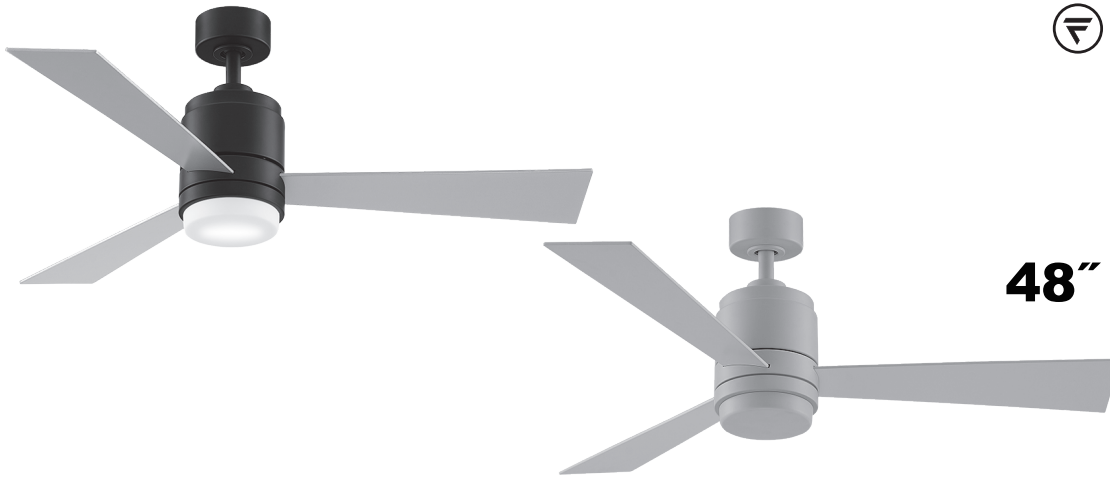

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	15.46"	15.46"	12.52"
Fan w/12" downrod	22.96"	22.96"	20.02"
Fan w/18" downrod	28.96"	28.96"	26.02"
Fan w/24" downrod	34.96"	34.96"	32.02"
Fan w/36" downrod	46.96"	46.96"	44.02"
Fan w/48" downrod	58.96"	58.96"	56.02"
Fan w/60" downrod	70.96"	70.96"	68.02"
Fan w/72" downrod	82.96"	82.96"	80.02"

**Available Finishes**

LBL	Black with Black / Sliver Blade and Opal Frosted Glass/Steel Cap
LMW	Matte White with Matte White Blade and Opal Frosted Glass/Steel Cap

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 15 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 22" plywood reversible blades is included.

**CONTROL OPTIONS:**

TR400S hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels, fan/light timer and off button. The reverse switch is located on the top housing. Optional CW1SW, CW2 and CW60WH wall controls available—sold separately. Optional BTCR9, CRL4WH and CRL8TS remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt LED included.

**DOWNROD OPTIONS:**

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only.

**Airflow / Energy Efficiency Info (120V)**

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	200	4889	96	0.43	51
Med	147	3769	126	0.32	30
Low	93	2418	179	0.22	14

**Light Bulb Information (120V)**

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%

**Energy Guide FTC**

Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
34	3095	9	92