



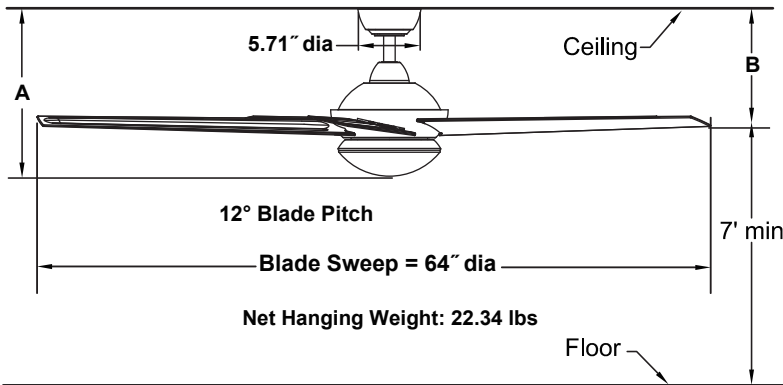

COVERT™

**LP8359LBN
64" Ceiling Fan**

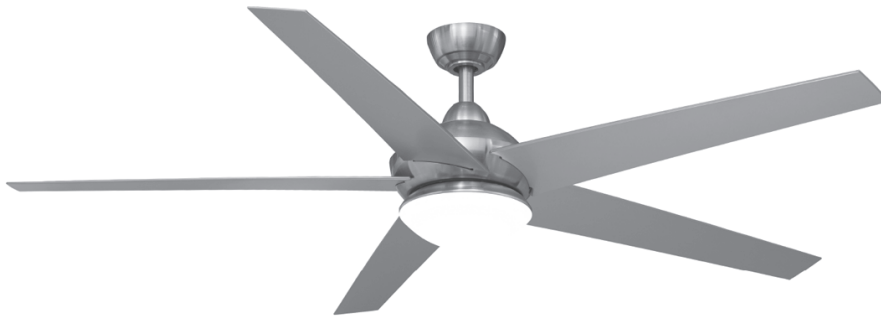

	A	B
Fan w/4.5" downrod	14.86"	11.14"
Fan w/12" downrod	22.36"	18.64"
Fan w/18" downrod	28.36"	24.64"
Fan w/24" downrod	34.36"	30.64"
Fan w/36" downrod	46.36"	42.64"
Fan w/48" downrod	58.36"	54.64"
Fan w/60" downrod	70.36"	66.64"
Fan w/72" downrod	82.36"	78.64"

Available Finishes	
LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 DC sensorless motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of five 29" plastic blades is included.

CONTROL OPTIONS:

TR205DS hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available— sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	141	6909	262	0.41	26
Med (9 th)	89	4217	568	0.12	7
Low (1 th)	29	1412	689	0.04	2

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
17	4982	5	297