425-1W

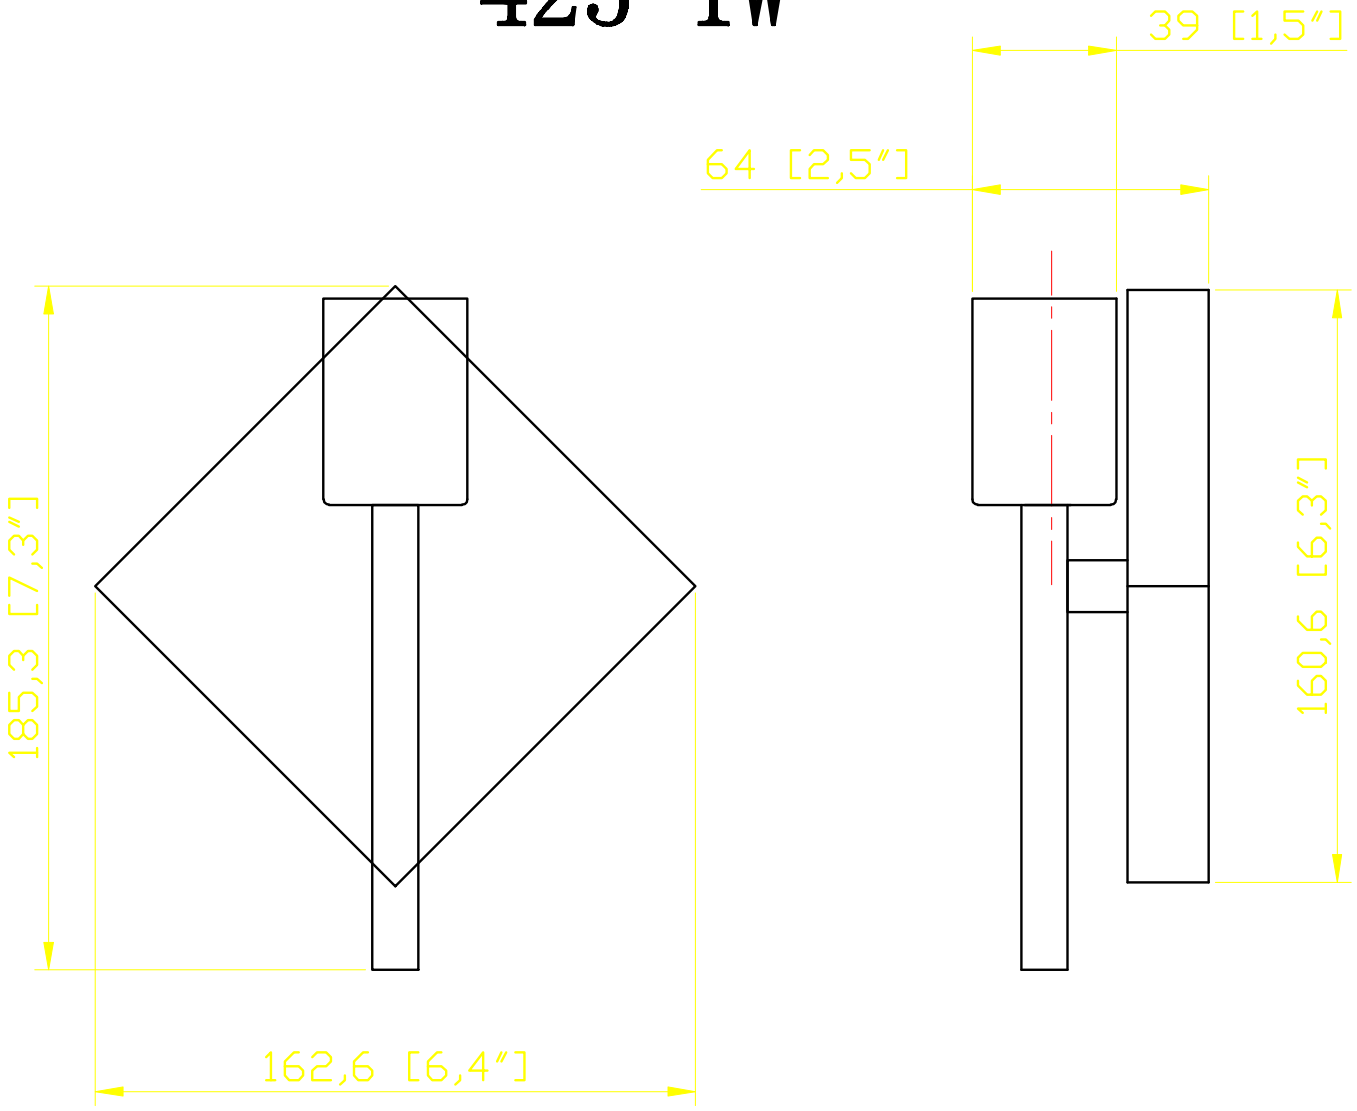

UL SPECIFICATION

* FIXTURE SHALL BE LISTED FOR LOCATION ONLY AND LABELED AS SUCH.
* FIXTURE MUST BE MANUFACTURED IN ACCORDANCE WITH UL STANDARD 1598.

PARTS SPECIFICATIONS

ITEM	QTY	DESCRIPTION
A	(1)	SOCKET- UL LISTED/CSA CERTIFIED BASE= MEDIUM SOCKET= PORCELIN SEE LEAD WIRE FOR SOCKET WIRE SPEC.
B	(1)	LEAD WIRE- 7" [180] FROM CANOPY UL LISTED/CSA CERTIFIED, AWG #18 105°C BLACK AND WHITE WIRE. STRIP 1/2 [12.7], SPLIT 3 [76.2]. FROM TOP OF SCROLL. (SEE CHART FOR COLOR). GROUND WIRE- 7" [180] FROM CANOPY 1/4 LAY COPPER GROUND WIRE. FROM TOP OF SCROLL. (SEE CHART FOR TINT).

NO.	PART NO.	DESCRIPTION	REQ.

INNOVATIONS
CREATIVITY MEET.* EVOLUTIONARY DE*ISN®

TITLE 2LT WALL MOUNT

DECIMAL	ANGULAR	FRACTIONAL	SCALE
NONE ±.001	± 1/2°	± 1/32	FULL
.X ±.010			
.XX ±.005	DATE 25/06/010	DRAWN BY SSL	CHECKED X	APPROVED X
.XXX ±.005			

PART NO. WALL REV.

ITEM NO. 425-1W REV. B