

# EW1506

## SPECIFICATION SHEET


High power exterior rated surface mount for safety and architectural illumination

- Wet location listed
- Die-cast aluminum housing
- Powder coated finishes
- Dimmable with ELV dimmer (Not included)
- 120V

Color Temp 3000K  
 CRI (Ra) >80  
 Dimming 100% - 10%  
 Rated Life 50,000 hours


Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)
120V	9W	800	200*	BK / GY

PROJECT	
DATE	TYPE

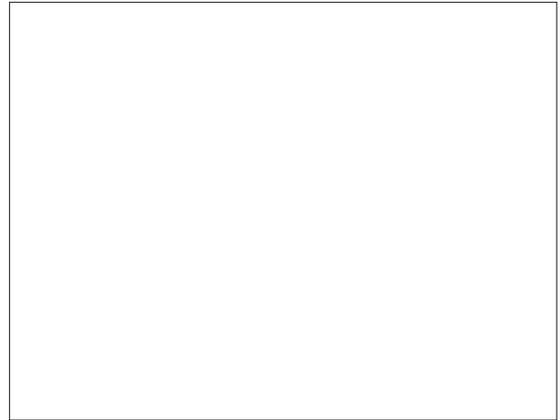


EW1506-BK

Powder Coat Finish  
 BK - Black  
 GY - Grey

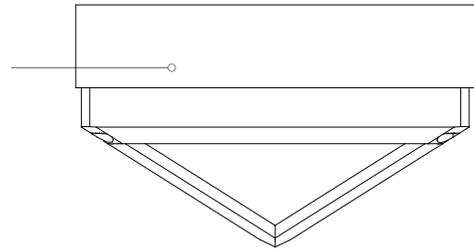

4-1/2"

White Acrylic  
 Diffuser

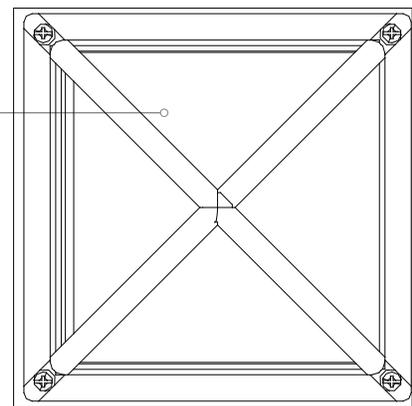

5-5/8"

5-5/8"

\*Subject to testing confirmation



EW1506-BK



EW1506-GY