



ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

8688

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the fuse box or circuit breaker box. Remove the old fixture from ceiling, including the single bar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Mounting Screws (A) about 1/4" into the pre-drilled holes in the Single bar (B) spaced about the same distance apart as the holes in the fixture body (D). Allow Screws (A) to protrude slightly beyond the ceiling surface.
4. Attach the single bar (B) to the junction Box using the two screws (C) from the junction Box. The side of the single bar marked "GND" must face out. The junction box not included.
5. Hold the fixture body (D) towards the single bar and connect the electrical wires as follows (See Fig.2). Connect the black wire from the fixture to the black house (hot) wire; connect the white wire from the fixture to the white house (neutral) wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your junction box has a ground wire (green or bare copper) connects fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the single bar. Tuck the wire connections neatly into the ceiling junction box as you are holding the fixture assembly toward the ceiling.
6. Place the glass plate (F) into the iron frame (H) and press firmly to seat the glass.
7. Attach the iron frame (E) to the top of the iron frame (H) using the lock screws (G).
8. Attach the assembly of iron frame (H) into center coupling of fixture body (D) and tighten it with the pipe (I).
9. Finish mounting the fixture body (D) by placing it over both Mounting screws (A) so that the screws protrude from the keyholes in the bottom of the fixture body (D).
10. Rotate the fixture body (D) until the screw are seated in the slots of the keyhole's and tighten it with a screwdriver.
11. Install the light bulbs(not included) in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
12. Raise the glass plate (J) to the bottom center pipe(I), aligning the hole, then lock with finial(K) .

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1


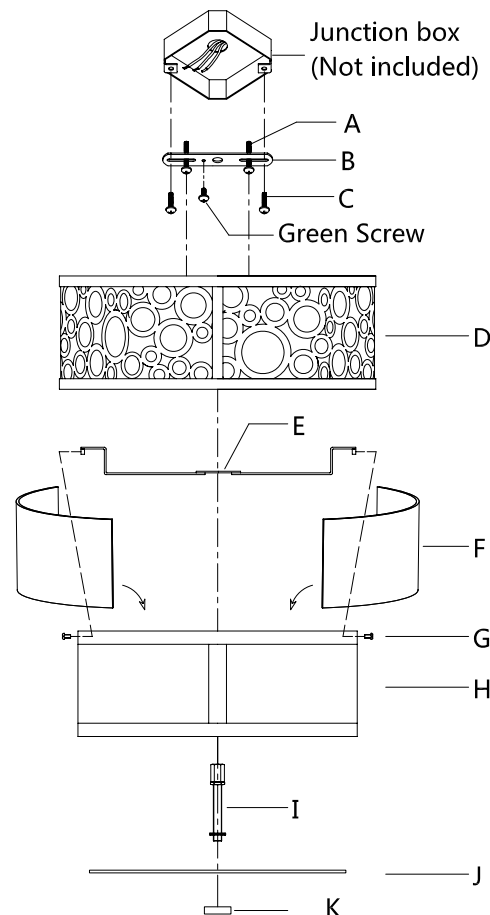


FIG.3

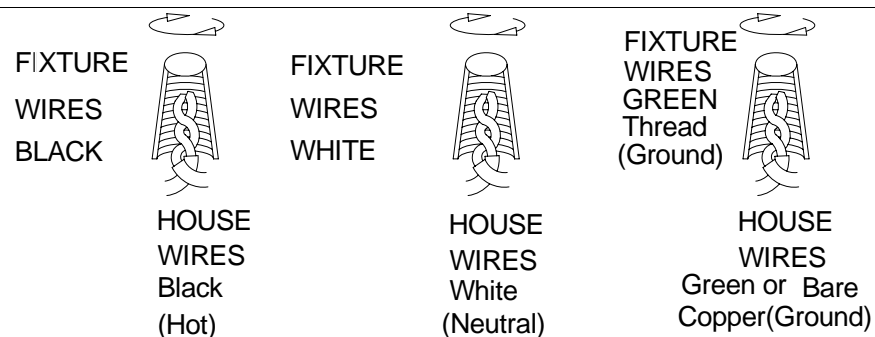

Thank you for purchasing a **LIVEX** product.
Need assistance with parts or assembly? Please call customer service at: **800-761-8056**
Or visit us online at: WWW.LIVEXLIGHTING.COM