




# X46302

# X46303

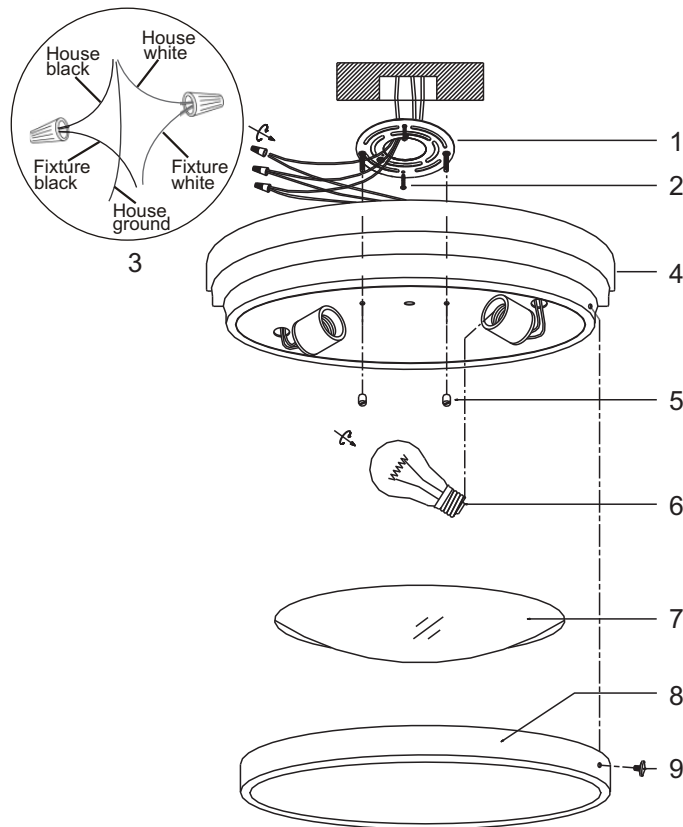

## INSTALLATION INSTRUCTIONS:

- Ensure main supply is switched off.
- Fit mounting bracket (1) onto mounting surface with self-tapping screws (2).
- Connect wires (3) according to color (White to White, Black to Black). Connect all earth lug together onto the crossbar with green screw to tight.
- Fit ceiling plate (4) onto mounting bracket with nuts (5).
- Install lamps (6) firmly into lampholder.
- Fit shade (7) and outer cover (8) onto ceiling plate with screw (9).
- Reconnect power.

## WARNING:

- This fitting must be earthed.
- Disconnect power and allow fitting to cool down before cleaning or changing the lamp.