


Ar Ruthiane

Timeless Elegance and Engineering Precision

Its graceful hourglass support arms embrace bullet-shaped motor housings, effortlessly rotating 360° around a sculptural teardrop center. Designed for unparalleled airflow control, its fan heads can be infinitely positioned in sweeping 180-degree arcs, allowing for optimal circulation tailored to any space. The steeper the angle, the faster the rotation—creating a mesmerizing dance of movement while delivering exceptional comfort and efficiency. Unlike traditional paddle fans, the Ar Ruthiane's rotation enhances both heating and cooling systems, ensuring a energy-efficient environment. Crafted from cast aluminum, heavy spun, and stamped steel, this fan is built to last, backed by a limited lifetime warranty.



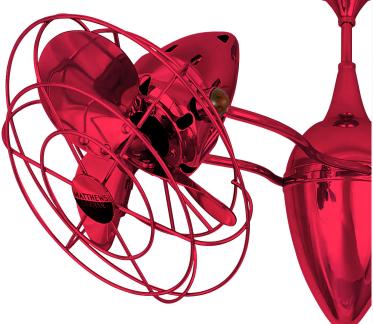

AR-BK-MTL Matte Black Finish with Metal Blades



AR-BN-WDBrushed Nickel Finish,
with Mahogany Tone Blades



AR-BZZT-WDBronzette Finish,
with Mahogany Tone Blades

FAN FINISHES

Standard Finishes

Metal Blades







BK BZZT BN
Matte Black Bronzette Brushed Nickel

Blade Finishes Solid Wood




WD Mahogany Tone

All Swatches See Page 138

BRBR **Brushed Brass BRCP Brushed Copper** PB Polished Brass CR Polished Chrome CP Polished Copper **CRDAMP** Polished Chrome Damp **BNDAMP** Brushed Nickel Damp WH Gloss White

LTBLUE Agua Marinha
LTPURPLE Ametista
BKN Black Nickel
GREEN Esmeralda
RED Rubi
BLUE Safira

TECHNICAL SPECIFICATIONS

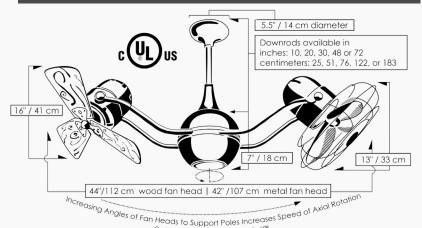

SKU BUILDER

AR-XXXX-XXX (Model+Finish+Blade)

PRODUCT FEATURES

AC AC Motor











FAN FEATURES

Fan Weight 21 lbs **Voltage** 110 or 220 **Downrod Lengths** inches: 5, 10, 20, 30, 48, 72

centimeters: 13, 25, 51, 76, 122, 183 Field cuttable, Non-threaded

Downrod Diameter 0.75 inch **Overall Drop** 12in / 30cm + downrod length

Fan Diameter
Solid Wood - 48 inches / 122 cm
Metal with Guard - 46 inches / 117 cm

Fan Blade Diameter

Solid Wood - 16 inches / 41 cm Metal with Guard - 13 inches / 33 cm

MOTOR FEATURES

Motor Type AC

Ambiance Soothing White Noise Safety Certification UL / CUL Warranty Limited Lifetime

DOE MOTOR EFFICIENCY DATA

Guard Options

Wood - No Cage Option

Metal - Safety Cage or Decorative Cage

RPM (Low/High) CFM/Watt (High) Wood - 723 / 1308 Wood - 48 Metal - 591 / 1075 Metal - 23

CFM (Low/High)
Wood - 2644 / 4724
Metal - 1215 / 2371
Blade Pitch
Wood - 19°
Metal - 31°

Watts (High) Wood - 96.94 Metal - 103.53

STANDARD EQUIPMENT

Downrod 10in / 25cm Flat Ceiling Canopy



Wall Control

Requires three-wire system

- 3-speed

- Oscillation On/Off

*For more information see accessory page. 132