



# Brisa 2000

Designed in 2000



Like satellites orbiting a planet, the Brisa's select mahogany blade head and lunar counterweight gently revolve 360° about its spherical gear housing. The fan head can be infinitely positioned in a 180-degree arc for optimum air movement; the greater the angle of the motor to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews 360° rotational fans circulate heat and air conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum, heavy spun and stamped steel, the Brisa carries a limited lifetime warranty.

Product Features





















Safety Cage Compatible



# **BRISA 2000**

FINISH AND BLADE OPTIONS		
SKU#	B2K-XXXXXX-XXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Solid Mahogany Wood Blade ABS Metal Blade	WD MTL

TECHNICAL SPECS		
Fan Weight	21 lbs	
Voltage	110 or 220	
Motor Type	AC	
Rotation	Yes	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183	
Downrod Diameter	.75 inch	
Overall Drop	10 inches / 25 cm + downrod length	
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	
Ambience	Soothing White Noise	
Safety Certification	UL / CUL	
Warranty	Limited Lifetime	
NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		

Fan Head Options	Solid Mahogany Wood*	Metal with Guard
Fan Diameter	40 inches / 102 cm	39 inches / 99 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	866 / 1336	790 / 1205
CFM (Low / High)	1602 / 2376	790 / 1265
Watts (High)	52.44	55.15
CFM/Watt (High)	45.31	22.94
Blade Pitch	19°	31°

#### STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy

Decora-style, 3-speed wall control in white

#### **OPTIONAL EQUIPMENT**

29° vaulted ceiling mount and canopy

NOTE: \*Unipack Shipping for Wood Blades only

# Standard Finishes






Brushed Nickel

### **Special Order Finishes**

Brushed Brass Polished Brass Brushed Copper Polished Copper Polished Chrome Polished Chrome Damp Brushed Nickel Damp

Gloss White

## TECHNICAL SPECIFICATIONS

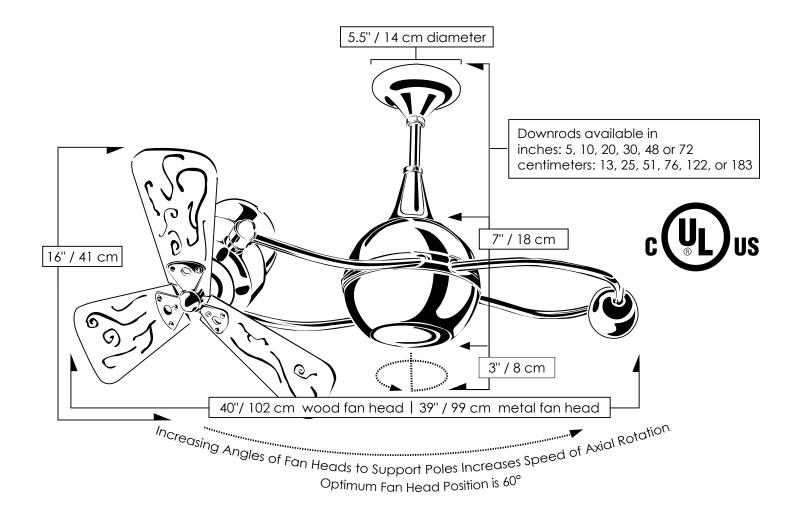

CEILING PITCH TABLE		
0/12	0 degrees	
1/12	4.76 degrees	
2/12	9.46 degrees	
3/12	14.04 degrees	
4/12	18.43 degrees	
5/12	22.62 degrees	
6/12	26.57 degrees	
7/12	30.26 degrees	
8/12	33.69 degrees	
9/12	36.87 degrees	
10/12	39.81 degrees	
11/12	42.51 degrees	

CEILING HEIGHT / DOWNROD TABLE		
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded	
10 ft or less	5 inches / 13 cm Use safety cages if applicable	
10 -12 feet	10 inches / 25 cm	
13 feet	20 inches / 51 cm	
14 feet	30 inches / 76 cm	
15 feet	48 inches / 122 cm	
16 feet +	72 inches / 183 cm	

#### Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com

