

INSTALLATION INSTRUCTIONS

For Model # 331/333/547/548/549(New 01/13/2003)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig. 1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach Crossbar (F) using Screw (E) to the Outlet Box (G), the side of the Crossbar marked "GND" must face out.
4. Screw Stud (D) into the screw hole of Crossbar (F).

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Crossbar using the Green Screw provided.

FINISHING THE INSTALLATION (Fig. 1)

6. Fix Poly Shade (A) to Back Plate by tightening two Nuts of Shade Support Tube (B) into openings of Poly Shade as shown in Fig. 1
7. Place Back plate into Stud (D) and secure it tightly against the wall using Cap Nut (C).
8. Install bulb into socket in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)**

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1


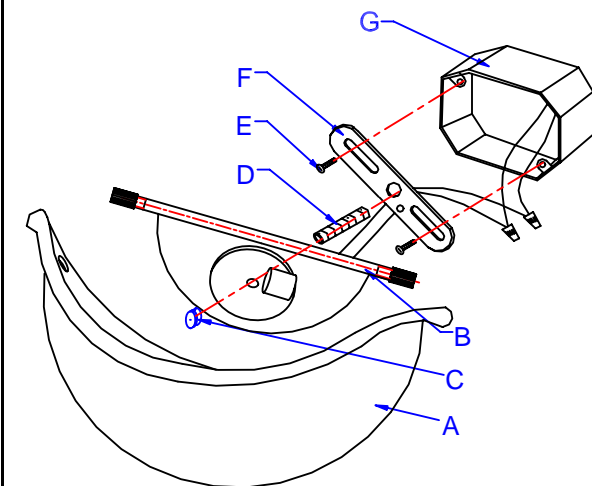


Fig. 2

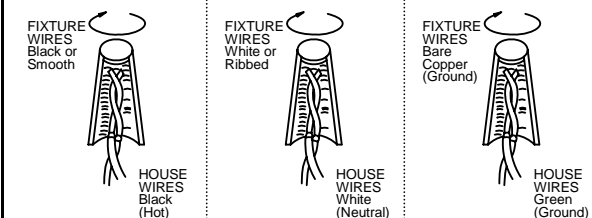

MIN 75°C SUPPLY CONDUCTORS

LA-679E