

INSTALLATION INSTRUCTIONS FOR FIXTURE #4109-xxx

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread the fixture loop (A) onto the nipple (B) until snug.
4. Adjust the fixture arms to their proper position.

MOUNTING THE FIXTURE (FIG. 2)

1. Install crossbar (P) with nipple (S), lock nut (R) and collar loop (T) to ceiling outlet box (V, not included) using outlet box screw (W). The side of cross bar marked "GND" must face out.
2. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain.
3. Attach the quick link (Z) to one end link of chain (X) and attach the quick link (Z) to the fixture loop (A). Note: The quick link (Z) must be fully closed.
4. Carefully lace the fixture wires through the chain (X).
5. Slip collar ring (Y) over the chain (X), then do the same with canopy (U).
6. Attach another quick link (Z) to another end of chain (X). Fasten the end link of quick link (X) to the collar loop (T). Note: The quick link (Z) must be fully closed.
7. Feed the fixture wires through the collar loop (T) and nipple (S) and pull until tight.

CONNECTING THE WIRE (See fig.3)

1. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.
2. Tuck the wire connectors neatly into the ceiling outlet box and raise the canopy (U) and collar ring (Y). Then thread collar ring (Y) onto collar loop (T) protruding through canopy.
3. Place the large glass shade (F), cushion ring (E) and socket ring (D) over the socket (G) in this order. Then secure the socket ring (D).
4. Install (9) Nine medium base bulb up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
5. Install the small glass shade (C) onto the cushion ring (E).

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

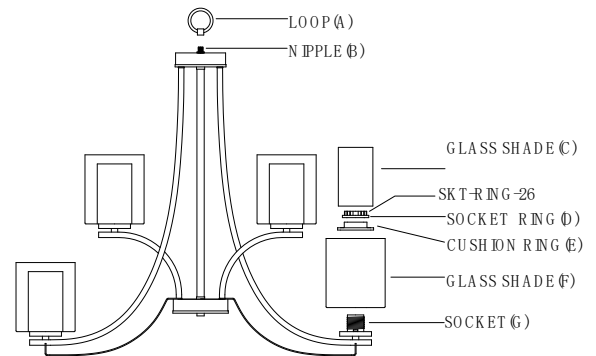


Fig. 2


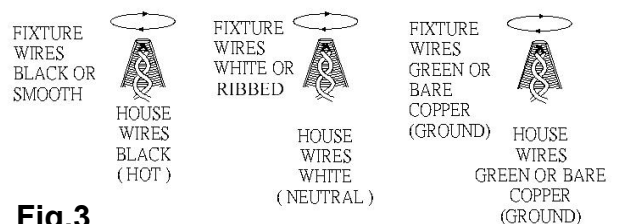


Fig.3

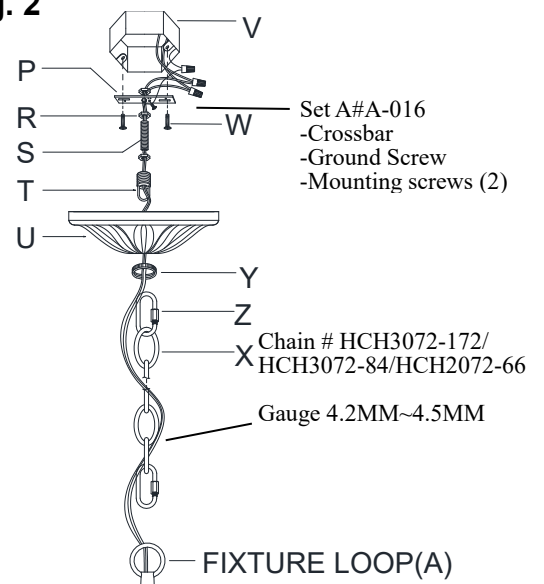

Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.