

INSTALLATION INSTRUCTIONS

Item#5219-xxx

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
VERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEU

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Install (3) three medium base bulbs and (2) two candelabra base bulbs up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
4. Place fixture body (B1/B2/B3) slightly on an angle into shade (G1/G2/G3). Reference Details on Fig.1. Carefully place cover (C1/C2/C3) on fixture body (B1/B2/B3), thread loop (L) to secure glass shade (G1/G2/G3) onto fixture body (B1/B2/B3). Do not over tighten.
5. Attach one lock link (H) onto loop (L) and one end of chain (M).
6. Carefully lace fixture's wires through chain (M), skipping every other chain link and canopy. Then attach another lock link (H) onto loop of canopy (F) and another end of chain (M). Repeat steps 4 & 5 for other lights.

HANGING THE FIXTURE (Fig. 2)

7. Attach crossbar assembly to junction box (Not included) using junction box screw (D). The side of crossbar (A) marked "GND" must face out. The length of all thread (E) into crossbar (A) may be adjusted if necessary. Then tighten with hex nuts provided.
8. Position hooks (N) and mark location of the hooks. Drill the holes on the ceiling and insert plastic anchors (S). Secure bracket (Q) to ceiling using wood screws (R) into plastic anchors (S).
9. Secure small cover (P) to bracket (Q) with hook (N). Adjusted the chain (M) to desired hanging height for each of light fixture body (B1/B2/B3). Remove the excess chain (M) with proper chain pliers. Repeat steps for all chains (M).

CONNECTING FIXTURE WIRE TO EXTENSION WIRE (Fig. 3)

10. Connect the five black wires from fixture to the black extension wire (included). Repeat steps for all five white wires from fixture and ground wires separately as shown in Fig.3. Making sure that all wire connectors are secured.

CONNECTING THE WIRE (Fig. 4)





11. Connect the electrical wire as shown in Fig.4. Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixtures ground wire to it. Otherwise, connect fixture ground wire directly to the crossbar using green screw provided.
12. Tuck wire connections neatly into the outlet box.

FINISHING THE FIXTURE (Fig.1)

13. Place canopy (F) up against ceiling and secure with decorative finial (J).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

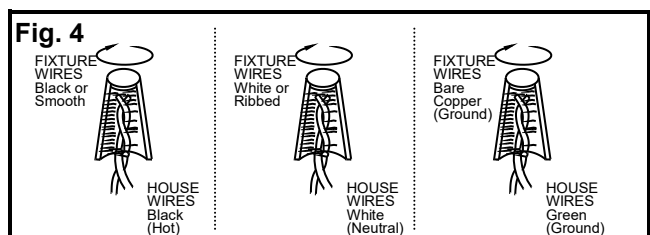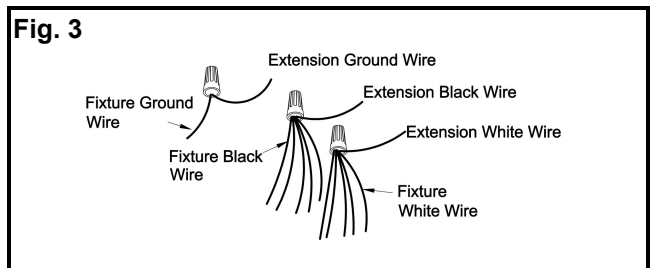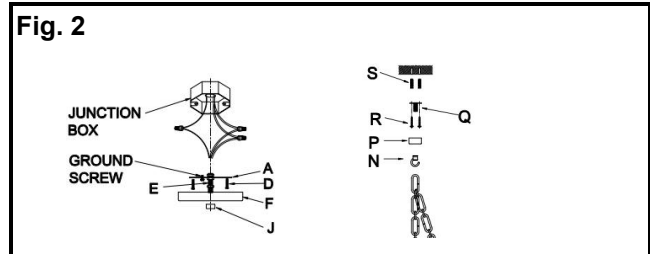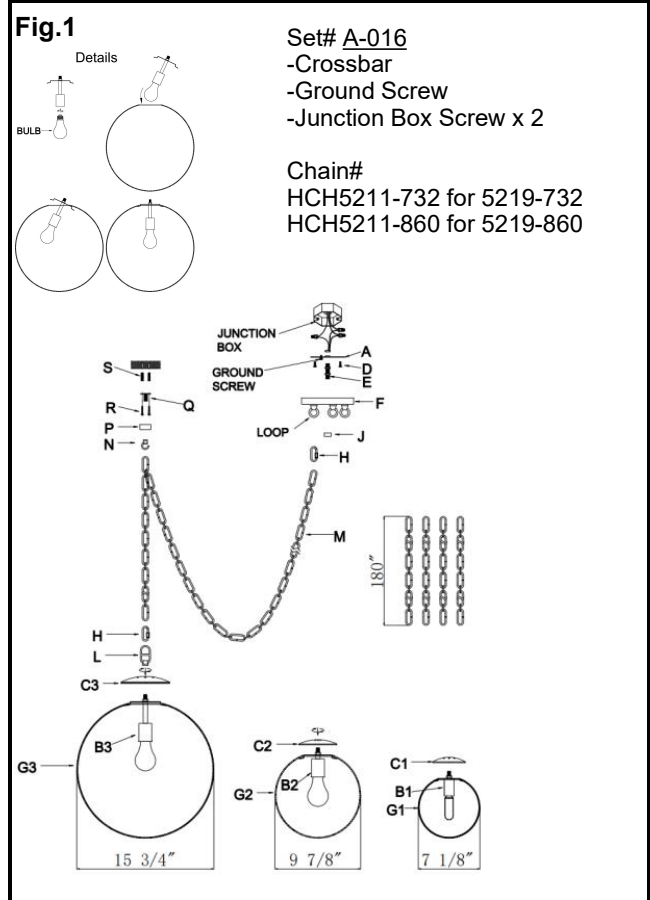

Notice: It is important to use proper chain pliers (not included). To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

