

INSTALLATION INSTRUCTIONS

Item#8885-A39 (New. 09/17/2012)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

CONNECTING THE WIRES (Fig. 2)

1. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
2. Pull the black, white and ground wires out of the post.
3. While supporting the fixture connect the electrical wires as shown in Fig. 2. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. If not, consult your electrician for proper grounding.

MOUNTING THE FIXTURE (Fig.1)

4. After wires are connected, tuck them carefully inside the post cup. Align the lantern with the post and secure with screws (G).
5. Loosen the finial (A) to remove washer (B), tube (C), metal leaf (I) and top dome (D). Remove any plastic bag material from the socket cluster.
6. Proceed to install the B10.5 / 3*60W bulbs (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**. Replace the top dome (D) and secure with the metal leaf (I), tube (C), washer (B) and finial (A).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig.1


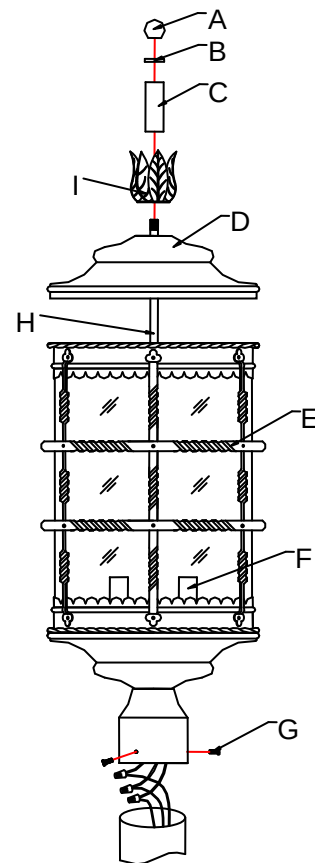


Fig. 2



Intertek

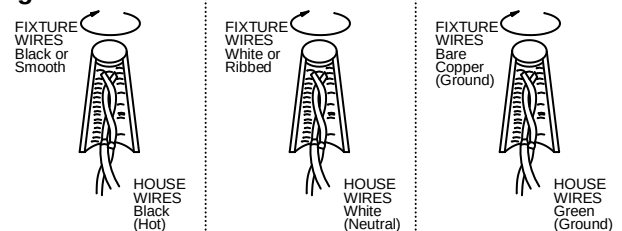