

INSTALLATION INSTRUCTIONS

For Model 8216-A61-PL

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove the old fixture.
2. Pull black, white and ground wires out of the post.
3. Next, connect electrical wires while supporting the lantern. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, tuck them carefully inside the post. Align the lantern with post and secure with sheet metal screws (H).
4. Install 4*26W B10.5 bulb (not included) into socket in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
5. Place the Metal Frame (D), Tube (C) and Metal Washer (B) over Nipple (H), then secure with Finial (A).
6. For installing or replacing B10.5 bulb at a later date, unloosen the finial (A) to remove Metal Washer (B), Tube (C) & Metal Frame (D). After the installation, replace Metal Frame (D), Tube (C) and Metal Washer (B) and secure with the finial (A).

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1


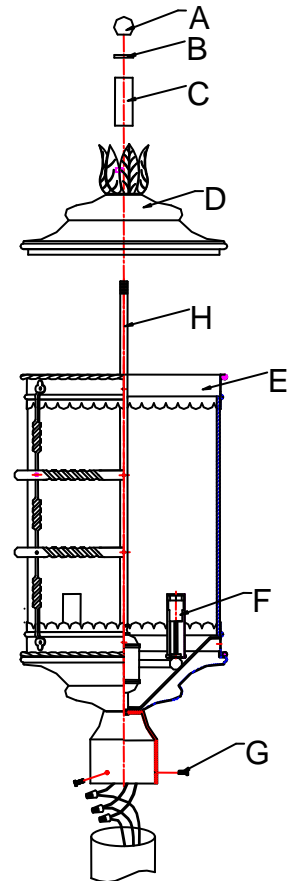


Fig. 2



LA-2003E

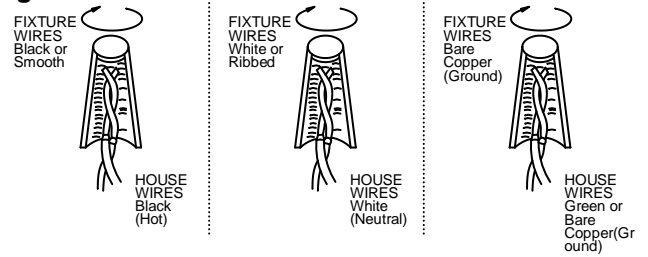

american
lighting
association