

---

## ASSEMBLY AND MOUNTING INSTRUCTIONS

---

### GENERAL

---

- **WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED**
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICIAN
- **FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH**
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.
- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

---

### INSTALLATION

---

- |                |  |                 |  |
|----------------|--|-----------------|--|
| <b>STEP 1.</b> | Feed the cord through the screw collar, canopy, nipple, and mounting plate until you desired hanging height is met.  | <b>STEP 6.</b>  | Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit. |
| <b>STEP 2.</b> | Tie an overhand knot to secure wire in place above the nipple, and trim off excess wire to min 6" beyond the knot. Strip each wire end 5/8"  |                 | <b>FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH!</b>   |
| <b>STEP 3.</b> | Attach the mounting plate to the outlet box using the mounting screws.   | <b>STEP 7.</b>  | Carefully place wires into Outlet Box.   |
| <b>STEP 4.</b> | Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire to green screw on the mounting plate.   | <b>STEP 8.</b>  | Place the canopy with the fixture over the outlet box and fasten it by the screw collar.   |
| <b>STEP 5.</b> | Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire nut and tightly wrap the wire nut with electrical tape. | <b>STEP 9.</b>  | Install the lamp. The fixture is rated for 60-watt type A lamp.  |
|                |  |                 | <b>DO NOT EXCEED RECOMMENDED WATTAGE!</b>  |
|                |  | <b>STEP 10.</b> | Restore power to the circuit at breaker or fuse-box.   |

---

### DIMMING

---

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware store.

---

### CLEANING

---


Please clean with a soft, dry cloth ONLY! Do not use cleaning products.



**mitzi**  
HUDSON VALLEY LIGHTING

## H421701 CASSIDY PENDANT

### ASSEMBLY AND MOUNTING DIAGRAM

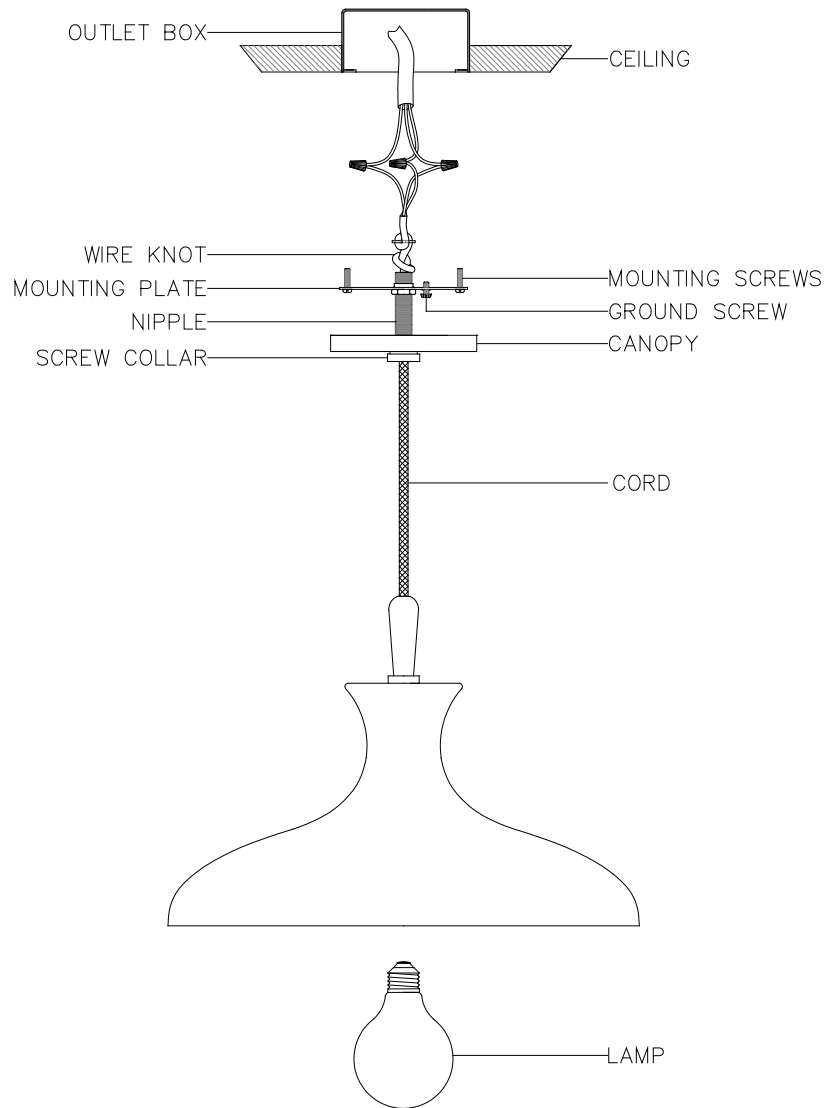

### WIRE NUT/TAPING DIAGRAM

