
# CARVE 60

FR-D2504-60L

60" Ceiling Fan

# DERN FORMS



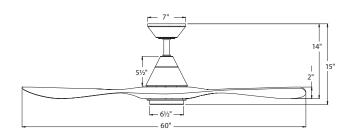

# **PRODUCT DESCRIPTION**

Organic beauty, now in a smart ceiling fan. With a housing and a trio of blades precisely crafted from natural wood, the CARVE smart ceiling fan brings a touch of nature into your space. Offered in 60-and 72-inch sizes, this versatile fan is configurable - select from a choice of housing and blade color to suit your desire. The fan is damp rated for use indoors or covered outdoor areas.

#### **FEATURES**

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- LED luminaire is included with this version no cover
- Includes remote control
- Optional wall control sold separately
- · Compatible with Modern Forms app

## AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM: 4378/6959 Weighted-Average/High Energy Use (W): 27/40 **Estimated Yearly Energy Cost (\$):** 7 Weighted-Average/High Efficiency (CFM/W): 189 Max RPM: 156

# ORDER NUMBER

Model	Housi	ng	Blade	Blade			
	MB MW			Matte Black Matte White			
FR-D2504-60L	<b>BZ</b> Bronze		BZ	Bronze			
			DK	Distressed Koa			
			DW	Dark Walnut			

**SPECIFICATIONS** 

**Construction:** Aluminum, Balsa Wood Blade: 20° Pitch, 60" sweep Downrod: .75"W x 6"H included

**Mounting Slope:** Up to 30° 80" Wire: **Hanging Weight:** 13.7 lbs. **Total Power:** 61W

Standards: UL/cUL Wet Location listed, Title 24 JA8-2016

Compliant, Title 20, Energy Star

**Motor Type:** 165 x 30 sensorless DC motor

## **WIRELESS PERFORMANCE**

Wi-Fi Range: Up to 150 ft\* **Bluetooth Range:** Up to 150 ft\*

#### **LUMINAIRE PERFORMANCE**

**LED Light Source:** 21W **Light Wattage:** 

Lumens/ Delivered Lumens: 1991 - 2159 (Based on CCT) / 1408

Dimming: Integrated CRI:

2700K, 3000K, 4000K, 5000K selectable **CCT Color Temperature:** 

**Rated Life:** 50,000 hours

Example: FR-D2504-60L-MB/DK

\*Results may vary based on application and surroundings.

The Modern Forms app synchronizes seamlessly with smart home devices you already own













modernforms.com Phone (800) 526.2588 (800) 526.2585

Headquarters/Eastern Distribution Center Central Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

# **CARVE 60**

# FR-D2504-60L

60" Ceiling Fan



# **OPTIONAL ACCESSORIES**

OPTIONAL ACCESSORIES				
Bluetooth Wall Control		F-WCBT	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control	MODERN O	F-RCBT	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		XF-I		Connects two downrods together.
Sloped Ceiling Kit		XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: F-WCBT-WT, Remote Control: F-RCBT-WT, Downrod: XF-12-BN, Downrod Coupler: XF-I-MB, Sloped Ceiling Kit: XF-SCK-MW

# SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

# **SLOPED CEILING DEGREE CONVERSION CHART**

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to  $30^{\circ}$  (7/12 pitch). Optional slope kit allows mounting on ceilings up to  $45^{\circ}$  (12/12 pitch). The receiver will mount inside canopy up to  $45^{\circ}$ .

NOTE: Recommended maximum downrod length of 72" with 80" lead wire