


Crown

FR-D2602-62L

62" Ceiling Fan

MODERN FORMS SMART FANS

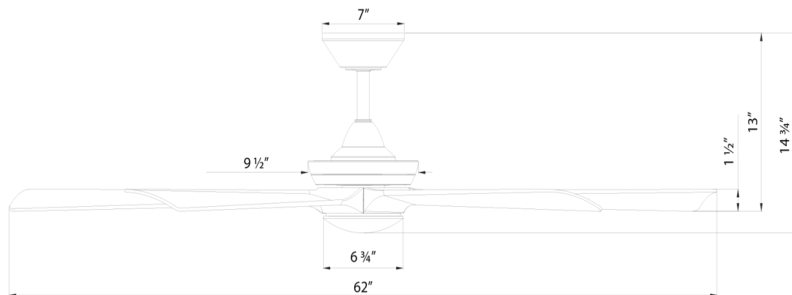

PRODUCT DESCRIPTION

Crown elevates luxury fan design with a sculptural alabaster diffuser and integrated, tunable LEDs that delivers both uplight and downlight in perfect symmetry. Light glows through hand-carved alabaster stone, casting a radiant halo above and a soothing glow below. The 62-inch fan delivers up to 7600 CFM with whisper-quiet DC efficiency. Smart-enabled and damp rated, Crown blends comfort, illumination, and art: making it ideal for grand interiors and outdoor lounges seeking elevated ambiance.

FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Includes BT remote control (F4-RUCBT-WT)
- Optional wall control sold separately (F4-WUCBT-WT)
- Compatible with MyWAC app

AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	5063/7618
Weighted-Average/High Energy Use (W):	24/36
Estimated Yearly Energy Cost (\$):	7
Weighted-Average/High Efficiency (CFM/W):	211
Max RPM:	139

ORDER NUMBER

Model	Housing	Blade
FR-D2602-62L	SB <i>Soft Brass</i>	MB <i>Matte Black</i>
	SB <i>Soft Brass</i>	MW <i>Matte White</i>

Example: **FR-D2602-62L-SB/MW**

*Results may vary based on application and surroundings.

*This fan comes uni-pack - blade select options are not available

SPECIFICATIONS

Construction:	Steel, ABS
Blade:	13° Pitch, 62" sweep
Downrod:	3/4"W + 6"H included
Mounting Slope:	Up to 30°
Wire:	66" (with connectors)
Hanging Weight:	17 lbs
Total Power:	82W
Standards:	UL/cUL Damp Location listed, Title 24 JA8-2016 Compliant, Title 20, Energy Star rated
Motor Type:	108 x 20 sensorless DC motor

WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft

LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	30W
Lumens:	3687 - 3846 (Based on CCT)/2195
Dimming:	Integrated
CRI:	90
Color Temperature:	2700K, 3000K, 3500K 4000K, 5000K selectable/tunable
Rated Life:	50,000 hours
Uplight Wattage:	16W
Uplight Lumens:	1495-1678 (Based on CCT)/850
Total Delivered Lumens:	3052 (up and down-light)

The Modern Forms app synchronizes seamlessly with smart home devices you already own








modernforms.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

OPTIONAL ACCESSORIES

Bluetooth Wall Control		F4-WUCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		R4-RUCBT	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		XF-12 12IN XF-18 18IN XF-24 24IN XF-36 36IN XF-48 48IN XF-60 60IN XF-72 72IN		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		XF-I		Connects two downrods together.
Sloped Ceiling Kit		XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: **F4-WUCBT-WT**, Remote Control: **F4-RCBT-WT**, Downrod: **XF-12-MB**, Downrod Coupler: **XF-I-MB**, Sloped Ceiling Kit: **XF-SCK-MW**

SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire