
# SIZE MATTERS FR-W2403-65L

65" Ceiling Fan

# ERNFORMS



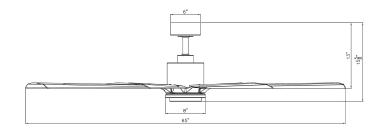

#### **PRODUCT DESCRIPTION**

Big, bold design is better. Offered in an impressive 65 and 84- inch sizes, the 8-blade Size Matters ceiling fan showcases elegant lines, sharply crafted blades and intelligent engineering. The motor is IPX4wet rated for outdoor use. The fan's contemporary styling is finished in Matte Black complemented by Matte White blades. Control is easy with smart home ecosystems via the Modern Forms app.

#### **FEATURES**

- · 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- LED luminaire is included with this version no cover
- Includes remote control
- Optional wall control sold separately
- · Compatible with Modern Forms app

#### **AIRFLOW/ENERGY EFFICIENCY**

Weighted-Average/High Airflow CFM:	5624/8335
Weighted-Average/High Energy Use (W):	21/33
Estimated Yearly Energy Cost (\$):	7
Weighted-Average/High Efficiency (CFM/W):	230
Max RPM:	115

#### ORDER NUMBER

Model	Housir	ng	Blade			
	MB	Matte Black	MB	Matte Black		
FR-W2403-65L	MW	Matte White	MW	Matte White		
	BZ	Bronze	BZ	Bronze		

Example: FR-W2403-65L-MB

\*Results may vary based on application and surroundings. \*This fan comes uni-pack - blade select options are not available



Construction:	Aluminum, ABS
Blade:	20º Pitch, 65″ sweep
Downrod:	.75"W x 6"H included
Mounting Slope:	Up to 30°
Wire:	80"
Hanging Weight:	35 lbs.
Total Power:	54W
Standards:	UL/cUL Wet Location listed, Title 24 JA8-2016
	Compliant, Title 20, Energy Star
Motor Type:	165 x 30 sensorless DC motor

#### WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

#### LUMINAIRE PERFORMANCE

Light Source:	LED
Light Wattage:	21W
Lumens/ Delivered Lumens:	1991 - 2159 <sup>1</sup> (Based on CCT) / 1888
Dimming:	Integrated
CRI:	90
CCT Color Temperature:	2700K, 3000K, 4000K, 5000K selectable
Rated Life:	50,000 hours

<sup>1</sup>Inventory is transitioning to Higher Wattage LED through Q2 2025. BZ is currently Higher Wattage.

The Modern Forms app synchronizes seamlessly with smart home devices you already own



modernforms.com Phone (800) 526.2588 Fax (800) 526.2585

Headquarters/Eastern Distribution Center Central Distribution Center 44 Harbor Park Drive Port Washington, NY 11050

1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760

Modern Forms retains the right to modify the design of our products at any time as part of the company's continuous improvement program. Dec 2023

# SIZE MATTERS FR-W2403-65L

65" Ceiling Fan



## **OPTIONAL ACCESSORIES**

Bluetooth Wall Control	F-WCBT	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control	F-RCBT	<b>WT</b> White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with Modern Forms Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod	XF-1212INXF-1818INXF-2424INXF-3636INXF-4848INXF-6060INXF-7272IN		All our downrods are .75 (in) and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers	XF-I		Connects two downrods together.
Sloped Ceiling Kit	XF-SCK		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Wall Control: F-WCBT-WT, Remote Control: F-RCBT-WT, Downrod: XF-12-BN, Downrod Coupler: XF-I-MB, Sloped Ceiling Kit: XF-SCK-MW

### SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13°	14-17°	18-21°	22-25°	26-29°	30-32°	33-35°	36-38°	39-41°	42-44°	45°
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire