

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:





Swirly

PD-32507

PRODUCT DESCRIPTION

A glass globe adorned with dynamic swirling contours combines color temperature selectable LED light and high style in the luxe Swirly pendant. The pendant's smoked glass orb is suspended from a simple cord and is capped with metal finished on either end for an elegant touch.

FEATURES

- Undulating smoked glass
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Aluminum frame with mouth blown pattern clear and opal glass
	diffuser

REPLACEMENT PARTS

RPL-GLA-32507 - Glass

HDW-HY25-MA - Hardware Pack


Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-32507 7"	2700K 2700K 3000K 3000K 3500K 3500K 4000K 4000K	SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel	7.8W 7.8W 7.8W 7.8W 7.8W 7.8W 7.8W	746 746 789 789 801 801 786 786	145 145 153 153 155 155 155 152

PD-32507

Example: PD-32507-40-SM/BN

For custom requests please contact customs@modernforms.com

Image Coming Soon

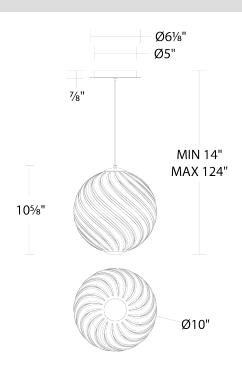

PD-32511

Project:	
Location:	

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:





Swirly

PD-32511

PRODUCT DESCRIPTION

A glass globe adorned with dynamic swirling contours combines color temperature selectable LED light and high style in the luxe Swirly pendant. The pendant's smoked glass orb is suspended from a simple cord and is capped with metal finished on either end for an elegant touch.

FEATURES

- Undulating smoked glass
- Spin-on round canopy with minimal hardware
- Thin, powered aircraft cables prove an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Color Temp	2700K,3000K,3500K,4000K
CRI	90
Construction	Aluminum frame with mouth blown pattern clear and opal glass
	diffuser

REPLACEMENT PARTS

RPL-GLA-32511 - Glass

HDW-HY25-MA - Hardware Pack

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-32511 11"	2700K 2700K 3000K 3000K 3500K 3500K 4000K 4000K	SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel SM/AB Smoke Glass/Aged Brass SM/BN Smoke Glass/Brushed Nickel	14.6W 14.6W 14.6W 14.6W 14.6W 14.6W 14.6W	1624 1624 1685 1685 1681 1681 1624	331 331 343 343 337 337 324 324

Example: PD-32511-40-SM/BN

For custom requests please contact customs@modernforms.com