

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:





Sybil

PD-60510

PRODUCT DESCRIPTION

Showcasing Art Deco elegance with its layered cantilevered bars, the graceful Sybil pendant exudes a sleek, modern aesthetic. A minimalist round globe shade illuminated by color temperature selectable LEDs enhances the sense of order and balance, emerging gracefully from the pendant's clean, structured lines.

FEATURES

- Driver concealed within the canopy
- · Crowned with decorative hardware
- Includes hang straight swivel for sloped ceiling installation
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K

SPECIFICATIONS

Rated Life 50,000 Hours

Standards ETL, cETL,Damp Location Listed

Input 120-277 VAC,50/60Hz

 Dimming
 ELV: 100-10%,TRIAC: 100-10%

 Color Temp
 3000K,2700K,4000K,3500K

CRI 90

Construction Aluminum frame with mouth blown opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52310 - Opal Glass

RPL-ROD-IN06-AB - 6" AB Replacement Rod RPL-ROD-IN06-NB - 6" NB Replacement Rod RPL-ROD-IN12-AB - 12" AB Replacement Rod RPL-ROD-IN12-NB - 12" NB Replacement Rod


Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-60510 10"	2700K	AB Aged Brass	14.7W	1576	1441
	2700K	NB Polished Black Nickel	14.7W	1576	1441
	3000K	AB Aged Brass	14.7W	1653	1476
	3000K	NB Polished Black Nickel	14.7W	1653	1476
	3500K	AB Aged Brass	14.7W	1679	1500
	3500K	NB Polished Black Nickel	14.7W	1679	1500
	4000K	AB Aged Brass	14.7W	1643	1464
	4000K	NB Polished Black Nickel	14.7W	1643	1464

PD-60510

Example: **PD-60510-40-NB**

For custom requests please contact customs@modernforms.com



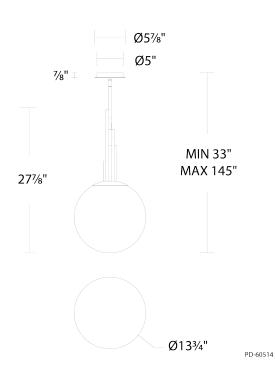

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:





Sybil

PD-60514

PRODUCT DESCRIPTION

Showcasing Art Deco elegance with its layered cantilevered bars, the graceful Sybil pendant exudes a sleek, modern aesthetic. A minimalist round globe shade illuminated by color temperature selectable LEDs enhances the sense of order and balance, emerging gracefully from the pendant's clean, structured lines.

FEATURES

- Crowned with decorative hardware
- Includes hang straight swivel for sloped ceiling installation
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- \bullet Driver concealed within the canopy

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277 VAC,50/60Hz
Dimming	ELV: 100-10%,TRIAC: 100-10%
Color Temp	4000K,3500K,3000K,2700K
CRI	90
Construction	Aluminum frame with mouth blown opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52313 - Opal Glass RPL-ROD-IN06-AB - 6" AB Replacement Rod RPL-ROD-IN06-NB - 6" NB Replacement Rod RPL-ROD-IN12-AB - 12" AB Replacement Rod RPL-ROD-IN12-NB - 12" NB Replacement Rod

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-60514 14"	2700K	AB Aged Brass	20.1W	2174	2149
	2700K	NB Polished Black Nickel	20.1W	2174	2149
	3000K	AB Aged Brass	20.1W	2286	2239
	3000K	NB Polished Black Nickel	20.1W	2286	2239
	3500K	AB Aged Brass	20.1W	2324	2274
	3500K	NB Polished Black Nickel	20.1W	2324	2274
	4000K	AB Aged Brass	20.1W	2277	2224
	4000K	NB Polished Black Nickel	20.1W	2277	2224

Example: **PD-60514-40-NB**

For custom requests please contact customs@modernforms.com