# **MOEN**<sup>®</sup>

#### **DESCRIPTION**

- · Metal construction with various finishes identified by suffix
- Designed to be installed through 1, 4-3/4" diameter hole
- Single function handheld shower
- 59" double interlock spiral hose (metal)
- · Includes integral dual check valves for backflow protection

#### **OPERATION**

- Pivot action lever style handle
- · Pull diverter to switch between faucet and handshower

#### **FLOW**

- · Faucet designed to deliver 6 gpm (22.7 L/min) at 45psi
- Handshowers designed to deliver 1.75 gpm (6.6 L/min) at 80psi

#### **STANDARDS**


- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all
  applicable requirements referenced therein
- ADA 🕭 for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations


## **Specifications**



FLARA™ Single Handle Single Riser Floor Mounted Tub Filler Faucet

Model: S931 series Floor Mount Rough-In Kit: TS50100 (Joist) TS50110 (Concrete)

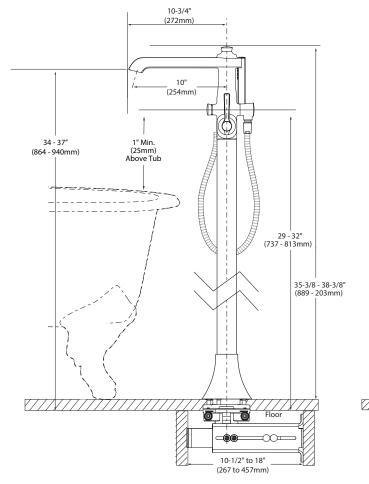

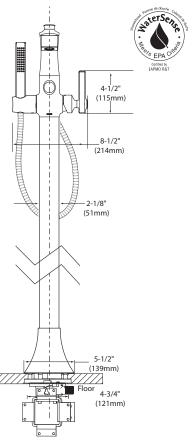

### **CRITICAL DIMENSIONS**

(DO NOT SCALE)