

NUTP5-LED (Amber Finish)

NUTP5-WLED (White Finish)

24V Hy-Brite LED Tape Light

Source: 200 Lumens per foot

PRODUCT DESCRIPTION

Nora's new Hy-Brite LED Tape is the perfect solution when you need more light than Nora's Standard LED Tape but less than Nora's high Performance High-Output LED Tape. Producing 200+ lumens, Damp Label* IP44 cULus Listed the Hy-Brite uses the same connectors and accessories as the HO LED Tape. The low profile tape is the ideal for coves, architectural details, under and in cabinets, toe kicks, and back lighting. IP44 rated, Hy-Brite can be used outdoors when not exposed to direct water spray. This tape is available in amber finish for dark surfaces and white finish for white or light surfaces.

FEATURES

- Available in 16' kit, 16' roll, 12" section, and 4" section
- Available in 90+ CRI
- Available in Amber finish and White finish
- 200+ Lumens per foot
- 44W per roll - 2.7W per foot
- 24V DC System
- Single color illumination with 3 colors temperature (4200K, 3000K, 2700K)
- 120° Beam Angle
- No soldering or additional wiring required
- Separable every 12" - easily disconnected and connected without soldering
- Field cuttable every 4" or 4 LEDs
- Single Maximum Run Length: 16' with magnetic dimmable drivers and 32' with electronic drivers
- Dimmable with dimable power supply
- Easy to install with pre-applied 3M™ adhesive tape or clips
- Title 24 Compliant
- cULus Listed and IP44 Rated for Damp* location

CONSTRUCTION

The tape is separable every 12", and can be cut every 4 LEDs at marked 4" intervals. Cutting does not effect circuit.

MOUNTING

Each Tape Light roll comes with pre-applied 3M™ adhesive tape and 15 clear acrylic clips for simple installation.

DRIVER:

A wide variety of drivers are available from direct plug-ins, Class II, and Hardwire Dimmable Class II Drivers up to 300 Watts.

ELECTRICAL

Power: 24V DC Input / 2.7 Watts Per Foot

Light Source: 12 Hy-Brite LEDs Per Foot

Operating Temperature: -25°C ~ 60°C (-13°F ~ 140°F)

Life Expectancy: 50,000 Hours

Maximum Run Length: (Single Maximum Run Lenth) 16' with magnetic dimmable drivers and 32' with electronic drivers.



24V LED Tape Light Roll

Catalog No.	Finish	Roll Length	Source	CRI	Color Temp.	Section Length
NUTP5-	(blank) = Amber Finish	16 = 16ft	LED	9=90+	27 = 2700k	/4 = 4"
	W = White Finish				30 = 3000k	/12 = 12"
					42 = 4200k	

NORALIGHTING.


Type

Project

Catalog No.

Lamp/Wattage

DIMENSIONS

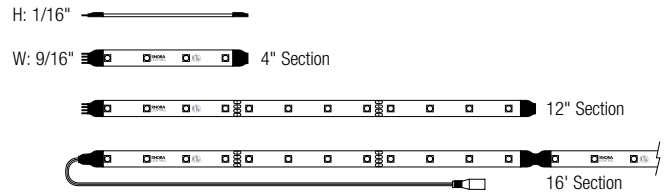

LABELS AND LISTINGS

cULus Listed for Damp* Location

IP44 Rated

Title 24 Compliant

California Energy Commission

3 Year Limited Warranty

HARDWARE

NATL-5100HW: 100W 24V Hardwire Electronic Driver

NMT-48/24C2D1: 48W 24V Dimmable Class II Hardwire Magnetic Driver w/ Integral Regular for Constant Current and Voltage

NMTD-60/24D: 60W Dimmable Class II Remote Hardware Magnetic Driver

NMTD-96/24D: 96W Dimmable Class II Remote Hardware Magnetic Driver

NMT-96/24C2D1: 96W 24V Dimmable Class II Hardwire Magnetic Driver w/ Integral Regular for Constant Current and Voltage

NMT-303/24C2D1: 3 x 100W 24V Dimmable Class II Hardwire Magnetic Driver w/ Integral Regular for Constant Current and Voltage

NATL-530HW: 30W Class II El. Driver (Requires NRA-6035 or NUSP-JBox)

NATL-560HW: 60W Class II El. Driver (Requires NRA-6035 or NUSP-JBox)

NATL-596: 24V 96W Class II Plug-In Electronic LED Driver

NATL-524: 24W Direct Plug-In El. Driver

NATL-545: 45W Direct Plug-In El. Driver

DRIVER ACCESSORIES

NRA-125/6: 6" Extension Cord for NATL-530HW & NATL-560HW

NRA-125/12: 12" Extension Cord for NATL-530HW & NATL-560HW

NRA-125/18: 18" Extension Cord for NATL-530HW & NATL-560HW

NRA-125/72: 72" Extension Cord for NATL-530HW & NATL-560HW

NRA-6035W/6: 6' Cord and Plug for NATL-530HW & NATL-560HW

NRA-6035W/10: 10' Cord and Plug for NATL-530HW & NATL-560HW

NUSP-JBox: Junction Box required for hardwiring NATL-530HW & NATL-560HW/12

HY-BRITE TAPE LIGHT ACCESSORIES

NAHO-602: 2" Interconnection Cables

NAHO-606: 6" Interconnection Cables

NAHO-618: 18" Interconnection Cables

NAHO-636: 36" Interconnection Cables

NAHO-672: 72" Interconnection Cables

NAHO-609: Power Line Interconnection

NAHO-611: Power Line Interconnection with On/Off Switch

NAHO-600: "Y" Splitter Cable

NAHO-601: "X" Splitter Cable

NATL-10: 10' Power Line Connector

NATL-30: 30' Power Line Connector

NATL-302: 5" Power Line Splitter

NATL-403: End Cap

NATHR-680: 4' Aluminum Channel

NATHR-685: Clear Acrylic Mounting Clips (Pack of 15)

NATL-415W: Low Voltage Splice Box

NATL-C23: 4" Aluminum Channel, Shallow w/ Wings

NATL-C24: 4" Aluminum Channel, Shallow

NATL-C25: 4" Aluminum Channel, Deep w/ Wings

NATL-C26: 4" Aluminum Channel, Deep

NATL-C27: 4" Aluminum Channel, J-Style

NATL-C28: 4" Aluminum Channel, Corner

*Consult Spec Sheets at www.noralighting.com for Limitations on Wet and damp Location Applications


NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2011

Aluminum Channel


Used to mount tape light to various surfaces.
Includes plastic diffuser

NATL-C23: 4' Aluminum Channel, Shallow w/
Wings

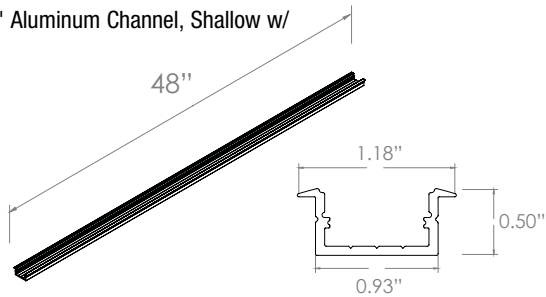**Aluminum Channel**


Used to mount tape light to various surfaces.
Includes plastic diffuser

NATL-C24: 4' Aluminum Channel, Shallow

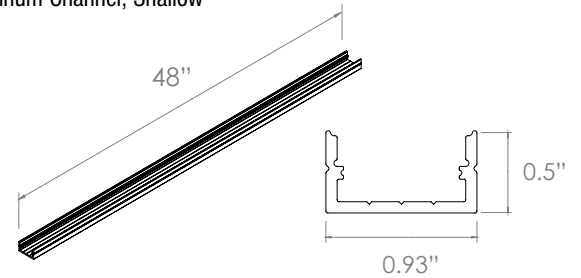**Aluminum Channel**


Used to mount tape light to various surfaces.
Includes plastic diffuser.

NATL-C25: 4' Aluminum Channel, Deep with
Wings

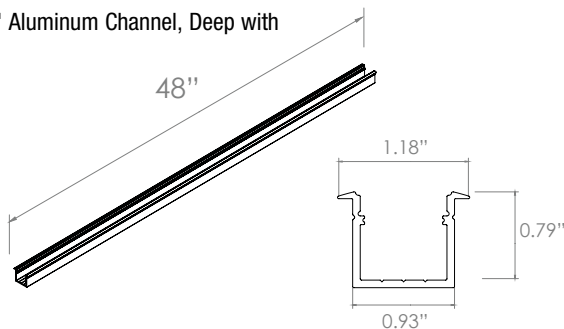**Aluminum Channel**


Used to mount tape light to various surfaces.
Includes plastic diffuser.

NATL-C26: 4' Aluminum Channel, Deep

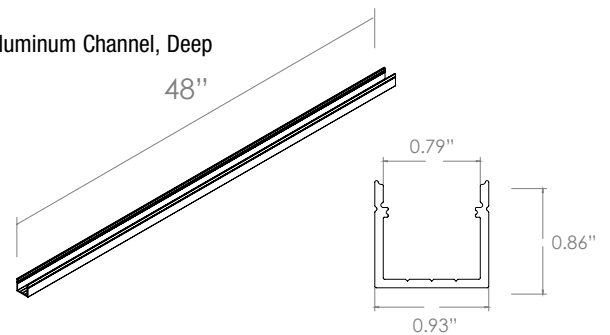**Aluminum Channel**



Used to mount tape light to various surfaces.

NATL-C27: 4' Aluminum Channel, J-Style

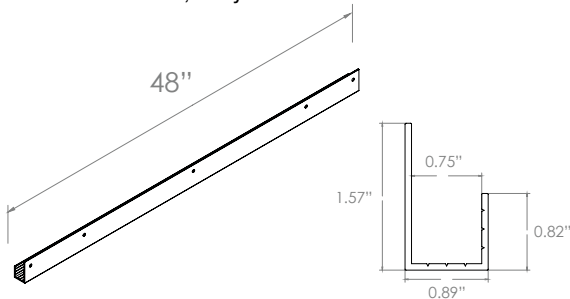**Aluminum Channel**

Used to mount tape light to various surfaces.
Includes plastic diffuser.

NATL-C28: 4' Aluminum Channel, Corner

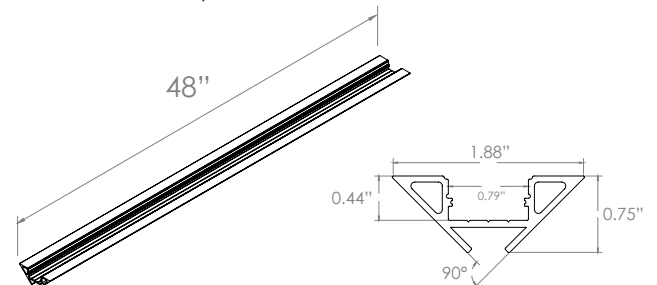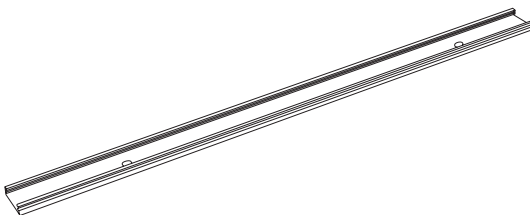**NATHR-680 - 4' Aluminum Channel**


Used to mount tape light to various surfaces. Tape Light snaps into the channel.
Field Cuttable. Recommended for most installations.

24V HY-BRITE TAPE LIGHT ACCESSORIES

NALTL-10 - 10' Power Line Connector

NALTL-30 - 30' Power Line Connector

NATL-302 - 5" Power Line Splitter

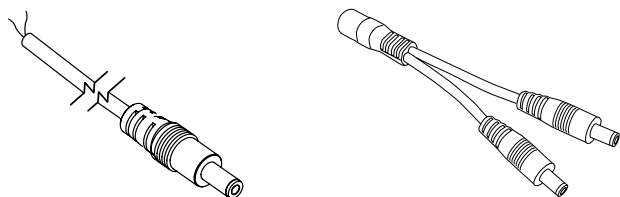

To be used with NTM Series Class II LED Driver. Replaces include 10' lead wire, to allow for 30' or less length between run and LED Drive.

NAHO-611 - 11" Power Line Interconnector w/ Switch

NAHO-609 - 12" Power Line Interconnector



The 12" power line interconnector cable connects a Tape Light run to a Driver. NAHO-609 is included with every Tape Light roll (16').


NAHO-602 - 2" Interconnection Cable

NAHO-606 - 6" Interconnection Cable

NAHO-618 - 18" Interconnection Cable

NAHO-636 - 36" Interconnection Cable


NAHO-672 - 72" Interconnection Cable



The interconnection cables allow for the linking of any two Tape Lights in any direction or extension of power line interconnectors. The arrow on the interconnection cable must always be facing upward to maintain polarity. Interconnection cables may be joined together for custom lengths.

NAHO-600 - "Y" Splitter Cable


NAHO-601 - "X" Splitter Cable

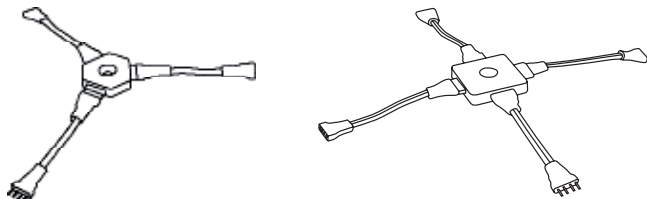

Cable Lengths: 3"


Splits connection from one Tape Light or Driver into two or three separate Tape Lights.

NATL-415W - Low Voltage Splice Box



Used to join Romex low voltage lead to low voltage power line connector or interconnector

NATL-403 - End Cap



A: Width: 1/2"
B: Length: 3/8"

Used to cover open end of Tape Light.


NATHR-685 - Mounting Clips (Pack of 15)



Used to mount tape light to surface, includes mounting screws. Pack of 15 are included with every Tape Light roll (16')


24V HY-BRITE TAPE LIGHT DRIVERS & DRIVERS ACCESSORIES

NRA-125/6 - 6" Flexible Connector
NRA-125/12 - 12" Flexible Connector
NRA-125/18 - 18" Flexible Connector
NRA-125/72 - 72" Flexible Connector



Used to extend length between NUSP-JBox and NAPK-530HW/12 & NAPK-560HW/12
 Can be joined together to create custom lengths.

NRA-6035W/6 - 6' Flexible Power Cord
NRA-6035W/10 - 10' Flexible Power Cord




Used to convert NAPK-530HW/12 & NAPK-560HW/12 into a direct plug-in driver.

NMT-48/24C2D1 - 24V, 48W. Class II Dimmable Hardwire Magn. Driver w/ Regulator for Constant Current & Voltage.


NMT-96/24C2D1 - 24V, 96W. Class II Dimmable Hardwire Magn. Driver w/ Regulator for Constant Current & Voltage.

NMT-303/24C2D1 - 24V, 300W (3x100W Breakers) C2 Dim. Hardwire Magn. Driver w/ Regulator for Constant Current & Voltage.



NATL-530HW - 24V, 30W. Class II Hardwire LED Driver.

NATL-560HW - 24V, 60W. Class II Hardwire LED Driver.




CONVERT TO
PLUG-IN DRIVER
WITH NRA-6035



Requires NUSP-JBox for hardwiring or NRA-6035 for direct plug-in

NUSP-JBox - Junction Box for Hardwired LED Drivers



A: Width: 4-1/2"
 B: Length: 2-3/4"
 C: Height: 1-1/2"

To be used with NAPK-530HW/12 & NAPK-560HW/12 Drivers.
 Capable of feeding two separate LED Drivers. Accepts Romex® or flex.
 Includes (1) male to male connector and (1) male to female connector

NATL-596 - 24V 96W Class II Plug-In Electronic LED Driver



Power line interconnector required for 24V LED Lightbar or 24V LED Tape Light


NATL-524 - 24V, 24W. Direct Plug-in LED Driver.

NATL-545 - 24V, 45W. Direct Plug-in LED Driver.




Power line interconnector required for 24V LED Lightbar or 24V LED Tape Light

NATL-5100HW - 24V, 100W Class II Hardwire LED Driver includes Hardwire Box and 10' Power Line



Power line interconnector required for 24V LED Lightbar or 24V LED Tape Light

NMTD-60/24D - Dimmable Class II Remote Hardware Magnetic Driver (60W)
NMTD-96/24D - Dimmable Class II Remote Hardware Magnetic Driver (96W)



Dimmable Class II Remote Hardwire Magnetic Driver
 With Integral Regulator for Constant Current and Voltage. Includes NATL-10 120/277V