

# BOLO Wall Sconce

## 3-553-xx

oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel



-15 Black



-20 Polished Nickel

**LIGHT SOURCE** 1 x 12.0W LED, 3000K, CRI 90

**LUMINAIRE POWER** 14.5W at 120V

**RATED LIFE** 60000 hr RL

**OPTIONAL COLOR TEMPERATURES** 3000K Only

**LUMEN OUTPUT** Delivered: 600 lm (LM-79)

**INPUT VOLTAGE** 120V to 277V AC, 50/60Hz

**DRIVER OUTPUT** 350mA, 14.7W max power

**DIMMING** TRIAC and ELV dimming at 120V AC;  
0-10V dimming, 100% to 1% current output


**CONSTRUCTION** Plated Steel and Acrylic

**DIFFUSER** Matte White Acrylic

**FINISHES** Black (-15), Polished Nickel (-20), Satin Nickel (-24)

**MOUNTING** With Small Backplate - 4" Square J-Box\* with single device mud ring  
With Large Backplate - 4" Octagonal J-Box\*  
\*Deep J-Box (Required to house driver)

**STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to  
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

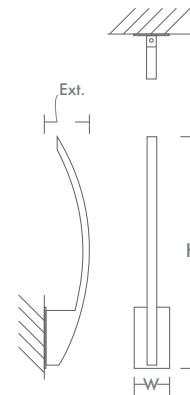

### DIMENSIONS

**W: 2.75" with Small Backplate**

**4.75" with Large Backplate**

**H: 18.00"**

**Ext: 3.50"**

**M.C: 15.75" From Top of Fixture**

Order example for standard fixture:

**3-553-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

