

# MONDO Pendant

## 3-6902-xx

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 10.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	11.6W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 625 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	350mA, 14.7W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Matte White Glass
<b>FINISHES</b>	Black (-15), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

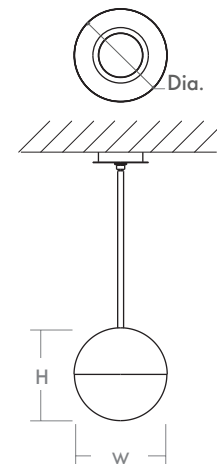

### DIMENSIONS

**W. Fixture:** 10.00"  
**H. Fixture:** 10.00"  
**Supplied with 2-8", 2-12", and 3-16"**  
**stems to customize hanging height.**

Order example for standard fixture:

**3-6902-15** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-6902-2715**

27: 2700K, 35: 3500K, 40: 4000K

