

Indoor 42" Fan Airpro


Ceiling Fans


	Type			
	-09	-20	-30	
P2500				


_					
-	ı	n	ı	c	r

				Dimensions (Inches)				
Catalog No	Brushed Nickel	Antique Bronze	White		<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
P2500	-09	-20	-30		42	12-1/4	8-1/2	4
Blades								

Side 1	Cherry	Classic Walnut	White
Side 2	Natural	Medium	Washed
	Cherry	Cherry	Oak

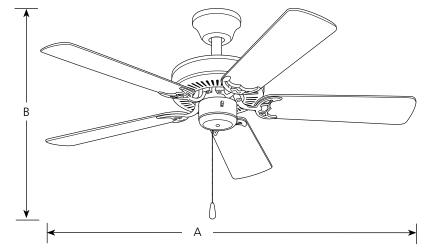





Fan mounted as close-to-ceiling

Specifications:

General

- 30 year limited warranty Blades
 - Five blades
 - Reversible
 - Sure Connect blade attachment system
 - Screws preinstalled in blades for attachment to motor arms
 - ° Special guides align blades to motor arms
 - Preinstalled rubber isolation pads minimize vibration noise
 - MDF blade material

<u>Motor</u>

Fan on a downrod.

- Three speed motor control; manual reverse control
- 153mm dia x 10mm high

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW: 3053 CFM cubic feet per minute

ELECTRICITY USE: 46 watts (excludes lights)

AIRFLOW EFFICIENCY: 67 cubic feet per minute per watt

• Pull chain on brushed nickel (-09) is chrome with walnut tab, white (-30) is chrome with a white fob, and on antique bronze (-20) is antique brass chain with medium oak fob

Mounting

- Dual ceiling mounting on downrod, or close to ceiling
- A 1-1/6" x 4-1/4" downrod is included. Longer accesssory downrods can be ordered separately
- Quick-Install canopy installs without removing outlet box screws and securely holds fan for wiring during installation
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)

Electrical

- 72" lead wires included
- Pre-wired

Labeling

UL/CUL listed

Progress Lighting 701 Millennium Blvd. Greenville, South Carolina 29607

www.progresslighting.com