

Globe LED

Ceiling Cord Mounted • Damp Location Listed **PROGRESS LED**

Description:

Globe LED Collection One-Light Brushed Nickel Opal Glass Mid-Century Modern Pendant Light

Specifications:

- Opal Glass Globe
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.5 in W., 1 in ht., 5.5 in depth
- 1/8 IP mounting plate for outlet box included
- 120 in of wire supplied

Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,276/73 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed Meets California Title 24 JA8-2016


P500148-009-30



Dimensions:

Diameter: 11-5/8 in
Height: 13-1/2 in
Overall Ht. W/Cord: 136-1/2 in

Opal Glass Globe
Width: 11-5/8 in
Height: 10-1/2 in

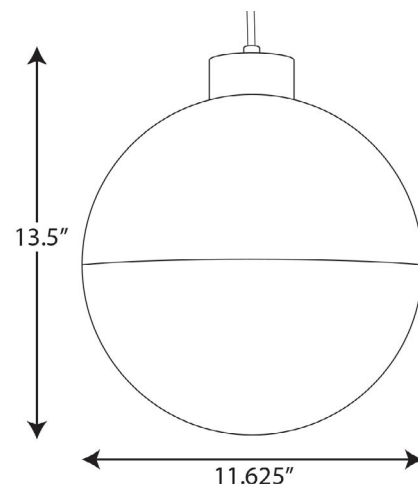


Photometrics:

ELECTRICAL DATA	P500148-009-30
Input Voltage	120 V
Input Frequency	60 Hz
THD	<20%
EMI/RFI	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P500148-009-30

LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 415
 Fixture Efficacy: 44.6
 Spacing Criteria:

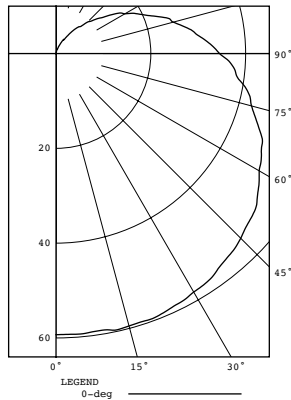

Test **18.00160** Test Date **02/14/18**

P500148-009-30

CANDELA DISTRIBUTION		
DEG	CANDELA	LUMENS
0	59.3	
5	59.4	6
15	59.5	17
25	58.8	27
35	57.5	36
45	55.1	43
55	51.9	47
65	47.8	47
75	42.7	45
85	37.8	41
90	34.5	
95	31.7	35
105	25.6	27
115	19.6	20
125	14.3	13
135	9.4	7
145	5.4	3
155	2.5	1
165	0.9	0
175	0.0	0
180	0.0	

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXT
0-30	50	12.0
0-40	86	20.7
0-60	175	42.1
0-90	309	74.4
90-120	82	19.6
90-130	94	22.7
90-150	105	25.3
90-180	106	25.6
0-180	415	100.0

P500148-009-30

Dimming Notes:

P500148-009-30 is designed to be compatible with many Triac/Forward Phase ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P
Lutron_Nova T NTELV-300
Lutron_Caseta
Lutron_Ariadni AY-600P
Leviton_Illumatech IPI06-1LZ
Lutron_Lumea LG-603PG
Leviton_SureSlide 6672
Leviton_SureSlide 6674
Lutron_Skylark Contour CTCL-153P
Lutron_Diva DVCL-153P
Pass & Seymour_Harmony DCL453PTCCCV6
Lutron_Toggler TGCL-153P
Lutron_Maestro MACL-153M
Lutron_Ariadni AYLV-600P
Lutron_Maestro MA-600
Lutron_Nova T NTLV-600
Lutron_Maestro MAELV-600
Lutron_spacer/system SPSELV-600
Leviton_Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.