

## Dome LED

Ceiling Cord Mounted • Dry Location Listed **PROGRESS LED**

### Description:

Dome Collection One-Light LED Pendant

### Specifications:

- White, Painted Silver Inside Aluminum Shade
- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" recessed outlet box: 5.1875 in W., 1.0625 in depth
- Mounting strap for outlet box included
- 120 in of wire supplied

### Performance:

Number of Modules	1
Input Power	17 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1,211/71.2 (LM-82)
Lumens/LPW (Delivered)	662/40.4 (LM-79)
CCT	3000 K
CRI	90+ CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Dry Location Listed

## P5341-3030K9




### Dimensions:

Diameter: 16 in  
 Height: 8-7/8 in  
 Overall Ht. W/Cord: 129 in

White, Painted Silver Inside Aluminum Shade  
 Diameter: 16 in

White Acrylic Diffuser  
 Width: 5-13/16 in  
 Height: 0-1/2 in

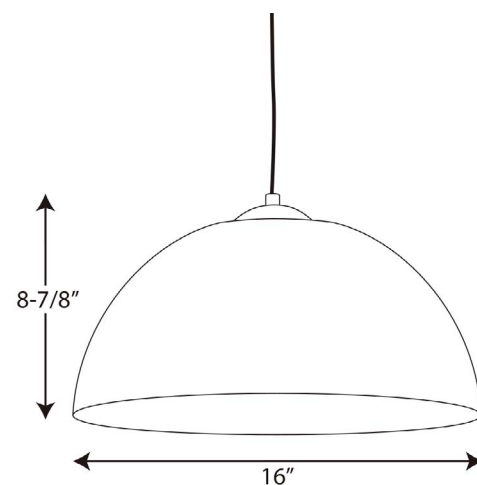

# P5341-3030K9

## Dimming Notes:

---

P5341-3030K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls:

---

Lutron\_Nova T NTELV-300

Lutron\_Vierti VTELV-600

Lutron\_Maestro MAELV-600

Lutron\_spacer/system SPSELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.