


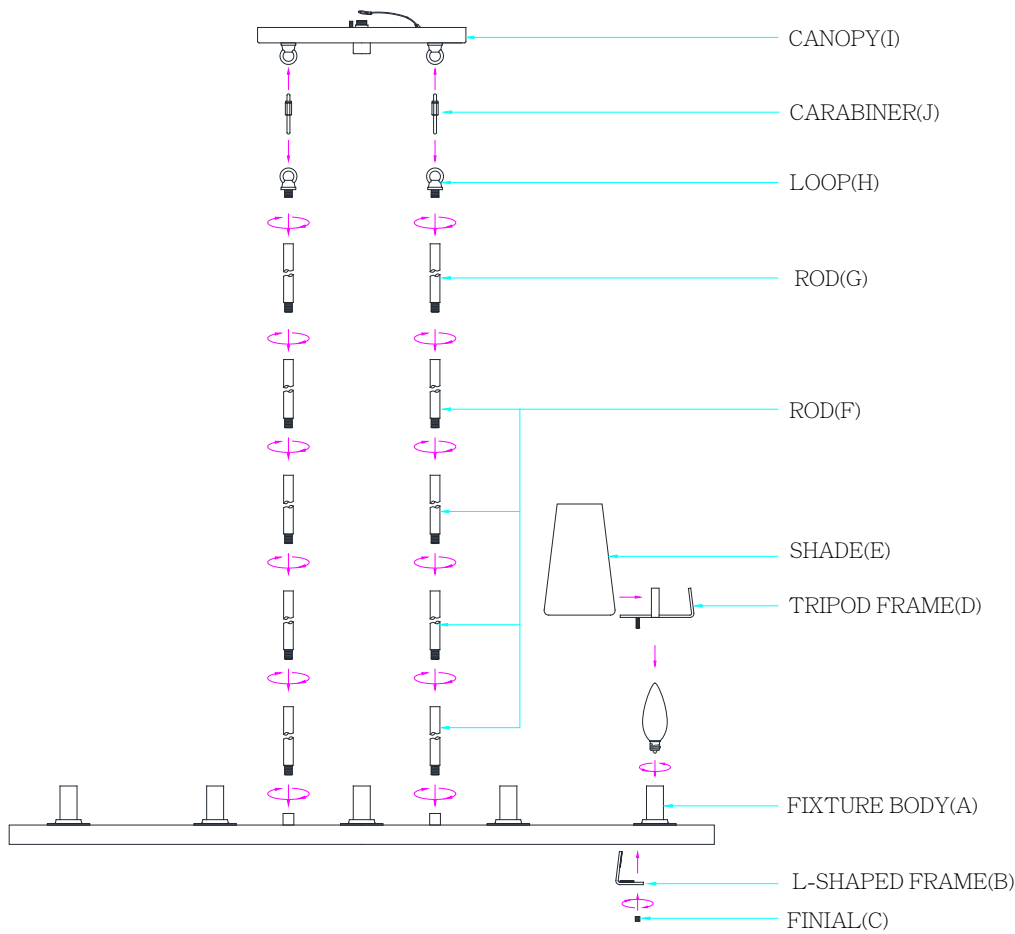

ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Unravel the supply power and ground wires and pass them through the center holes of rod (F), rod (G), loop (H) and canopy (I).
4. Thread the bottom of rod (F) into the coupling on the fixture body (A). Repeat the process for remaining rods (F) and rod (G), as shown in the diagram, until snug.
5. Install the loop (H) onto the top of rod (G).
6. Use carabiner (J) to connect the loop (H) to the loop on the canopy (I) and twist the locking mechanism to secure.
7. Refer to the additional installation instructions included with the product for wiring and installation.
8. Install proper bulbs (not included) into each socket referring to the markings and/or labels on the fixture for maximum wattage.
9. Carefully install the shade (E) on the tripod frame (D) and place on the socket. Align the nipple on the bottom of the tripod frame (D) with the mounting hole of the flat washer on the socket, and align the small hole of the L-shaped frame (B) with the nipple, securing with finial (C).
10. Restore the power to the installation point and retain this sheet for future reference.