


Project:

Thin-Line LED Wall Bar

SKU: 2810.25-8

One of our best selling families, Thin-Line is a system of minimally scaled LED wall bars, indirect light wall bars, and pendants. Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. One-sided configurations direct light in a single direction, and can be mounted in an upright or downlight orientation. Two-sided configurations direct light both up and down.

Learn more: <https://sonnemanlight.com/thin-line-led-wall-bar>

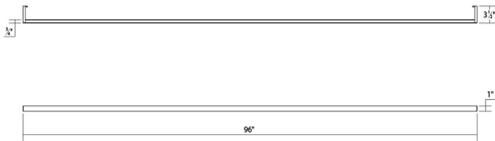

Dimensions

| | |
|------------------------------|--------------|
| Height | 1" |
| Width | 96" |
| Extends | 3.5" |
| Minimum Extension | 3.5" |
| Maximum Extension | 3.5" |
| Size | 8' One-Sided |
| Canopy/Backplate/Base Width | 1" |
| Canopy/Backplate/Base Height | 1" |

Electrical Specs

| | |
|---------------------------------|--------------|
| Bulb(s) Included? | Yes |
| Bulb 1 Type | Integral LED |
| Total LED, Bulb or Socket Count | 1 |
| Input Voltage | 120VAC |
| Wattage | 47 |
| Initial Lumens | 3120 |
| Delivered Lumens | 1800 |
| Kelvin | 3000K |
| CRI | 90 |
| Power Supply Type | Driver |
| Power Supply Quantity | 1 |
| Power Supply Location | Remote |
| Dimming Type | TRIAC/ELV |

Installation

| | |
|--------------------------|-------------------------------|
| Installation | Licensed electrician required |
| Installation Orientation | Any Orientation |

Diffuser(s), Shade(s) and Lens(es)

| | |
|---------------|-----------------|
| Diffuser Type | Optical Acrylic |
|---------------|-----------------|

Shipping

| | |
|-----------------------|---------------|
| Carton 1 L x W x H | 99" X 7" X 4" |
| Carton 1 Gross Weight | 6 LBS |

General Listings

| | |
|---------------|-------------------|
| Color/Finish | Satin Black (.25) |
| Features | Damp Rated |
| Certification | C-ETL-US |

Available Finishes

| | |
|--------------------|---|
| Available Finishes | Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03) |
|--------------------|---|

Available Color Temperatures

| | |
|------------------------------|---------------------|
| Available Color Temperatures | 2700K, 3000K, 3500K |
|------------------------------|---------------------|