



Project:

# Thin-Line Indirect LED Wall Bar

SKU: 2814.16-3

One of our best selling families, Thin-Line is a system of minimally scaled LED indirect light wall bars, [uplight/downlight wall bars](#), and [pendants](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Indirect configurations reflect light back onto the wall or mounting surface to radiate indirect illumination.

Learn more: <https://sonnemanlight.com/thin-line-indirect-led-wall-bar>

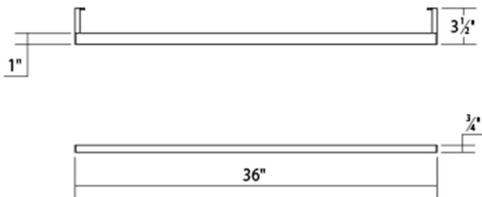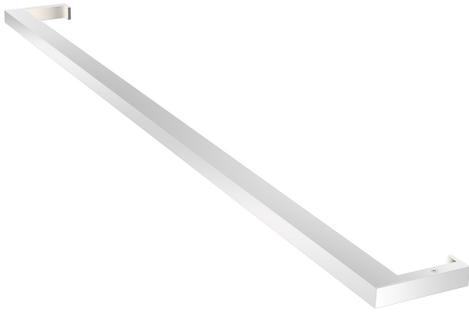

## Dimensions

Height	0.75"
Width	36"
Extends	3.5"
Minimum Extension	3.5"
Maximum Extension	3.5"
Size	3'
Canopy/Backplate/Base Width	1"
Canopy/Backplate/Base Height	0.75"

## Electrical Specs

Bulb(s) Included?	Yes
Bulb 1 Type	Integral LED
Total LED, Bulb or Socket Count	1
Input Voltage	120VAC
Wattage	19
Initial Lumens	1110
Delivered Lumens	670
Kelvin	3000K
CRI	90
Power Supply Type	Driver
Power Supply Quantity	1
Power Supply Location	Remote
Dimming Type	TRIAC/ELV

## Installation

Installation	Licensed electrician required
Installation Orientation	Any Orientation

## Diffuser(s), Shade(s) and Lens(es)

Diffuser Type	Optical Acrylic
---------------	-----------------

## Shipping

Carton 1 L x W x H	40" X 7" X 4"
Carton 1 Gross Weight	4 LBS

## General Listings

Color/Finish	Bright Satin Aluminum (.16)
Features	Damp Rated
Certification	C-ETL-US

## Available Finishes

Available Finishes	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
--------------------	---

## Available Color Temperatures

Available Color Temperatures	2700K, 3000K, 3500K
------------------------------	---------------------

## Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
2814.XX-3	3'	19	90	670
2814.XX-4	4'	22	90	900
2814.XX-4-27	4'	22	90	900
2814.XX-4-35	4'	22	90	900
2814.XX-6	6'	36	90	1350
2814.XX-8	8'	47	90	1800