



Project:

Thin-Line LED Pendant - 3'  
One Sided Satin White

SKU: 2816.03-3

One of our best selling families, Thin-Line is a system of minimally scaled LED linear pendants, [uplight/downlight wall bars](#), and [indirect light wall bars](#). Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line Pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. The driver for this fixture must be installed in a remote location. If you would like the look of a smaller canopy than our standard, our [Optional Mini Box Canopy](#) is also available for the Thin-Line LED Pendant.

Learn more: <https://sonnemanlight.com/thin-line-led-pendant>

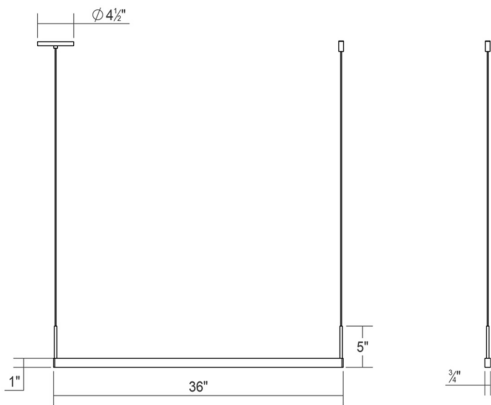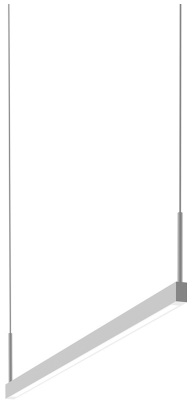

Dimensions

|                              |                    |
|------------------------------|--------------------|
| Height                       | 5"                 |
| Width                        | 36"                |
| Length                       | 0.75"              |
| Hanging Details              | 6' Adjustable Cord |
| Size                         | 3' One-Sided       |
| Canopy/Backplate/Base        | 4.5"               |
| Canopy/Backplate/Base Height | 0.5"               |

Electrical Specs

|                                 |              |
|---------------------------------|--------------|
| Bulb(s) Included?               | Yes          |
| Bulb 1 Type                     | Integral LED |
| Total LED, Bulb or Socket Count | 1            |
| Input Voltage                   | 120VAC       |
| Wattage                         | 19           |
| Initial Lumens                  | 1110         |
| Delivered Lumens                | 670          |
| Kelvin                          | 3000K        |
| CRI                             | 90           |
| Power Supply Type               | Driver       |
| Power Supply Quantity           | 1            |
| Power Supply Location           | Remote       |
| Dimming Type                    | TRIAC/ELV    |

Installation

|                            |                               |
|----------------------------|-------------------------------|
| Installation               | Licensed electrician required |
| Sloped Ceiling Compatible? | Compatible up to 45°          |
| Cord Length                | 6 ft                          |
| Minimum Hanging Height     | 5.75"                         |
| Maximum Hanging Height     | 73.75"                        |

Diffuser(s), Shade(s) and Lens(es)

|               |                 |
|---------------|-----------------|
| Diffuser Type | Optical Acrylic |
|---------------|-----------------|

Shipping

|                       |               |
|-----------------------|---------------|
| Carton 1 L x W x H    | 39" X 7" X 4" |
| Carton 1 Gross Weight | 4 LBS         |

General Listings

|               |                   |
|---------------|-------------------|
| Color/Finish  | Satin White (.03) |
| Features      | Damp Rated        |
| Certification | C-ETL-US          |

Available Finishes

|                    |                                                                   |
|--------------------|-------------------------------------------------------------------|
| Available Finishes | Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03) |
|--------------------|-------------------------------------------------------------------|

Available Color Temperatures

